

LED LIGHTS FOR HOTEL/MOTEL & COMMERCIAL



INDEX




OUTDOOR LIGHTING
COLLECTION



INDOOR LIGHTING
COLLECTION




LED BATHROOM
LIGHTING



LED HALLWAY
LIGHTING



LED EXIT & EMERGENCY
LIGHTING



GUEST ROOM
LIGHTING



COMPANY OVERVIEW

We help companies, industries & people to experience the power & possibility of light. With our headquarters located in Midland TX, USA; HIGHLINE LED stands upfront since the year 2017. Within a short period of time; it has led us to a bright future considering our vast technical knowledge & professional experience in the field of lighting. Since our inception, we've thrived to design solutions that are high performance, energy efficient, cost efficient & easy to integrate.

VISION

Our vision is to expand our reach and offer solution to every lighting problem faced by any company, industry and individual that also with minimal cost and maximum performance. To establish ourselves as a one stop solution for lighting requirements across sectors.

MISSION

Our mission is to reach heights such a way that it benefits us as well as our clients and to offer every kind of solution to them. Our mission stands upright with a focus in becoming a global brand working for enlightening the World thereby illuminating the lives of our customers.



ABOUT US


Similar to most success stories, ours too started from a small 3000 SQFT warehouse. 2017 was the year when we decided to take our career in our hands and build a foundation for HIGHLINE LED, which is now headquartered in Midland, TX, USA with an operating facility spread across an area of 20,000 SQFT.

Under the leadership of our visionary founder, and with a team of dedicated and hard-working warriors, HIGHLINE LED is now a renowned name amongst home-owners, commercialists, as well as industrialists.

Our offerings for lighting solutions range from outdoor, indoor, and commercial with each product being highly accredited for its design, energy efficiency, and quality. Besides, we are constantly innovating to meet the evolving requirements of our customers, and offer customized solutions as well.

With more than 5000 clients across USA, hospitality and service sectors being the major partakers, HIGHLINE LED is committed to serving the best solutions with superior execution. We strive to payback the world by being energy-efficient and environment conscious.

Since sky has no limits, our ambitions are limitless too and our journey continues. Keeping up with the latest trends, we mark our presence at several trade shows and expos around the world. With HIGHLINE LED as your lighting solutions partner, your surroundings stay bright, aflight, and a delight.

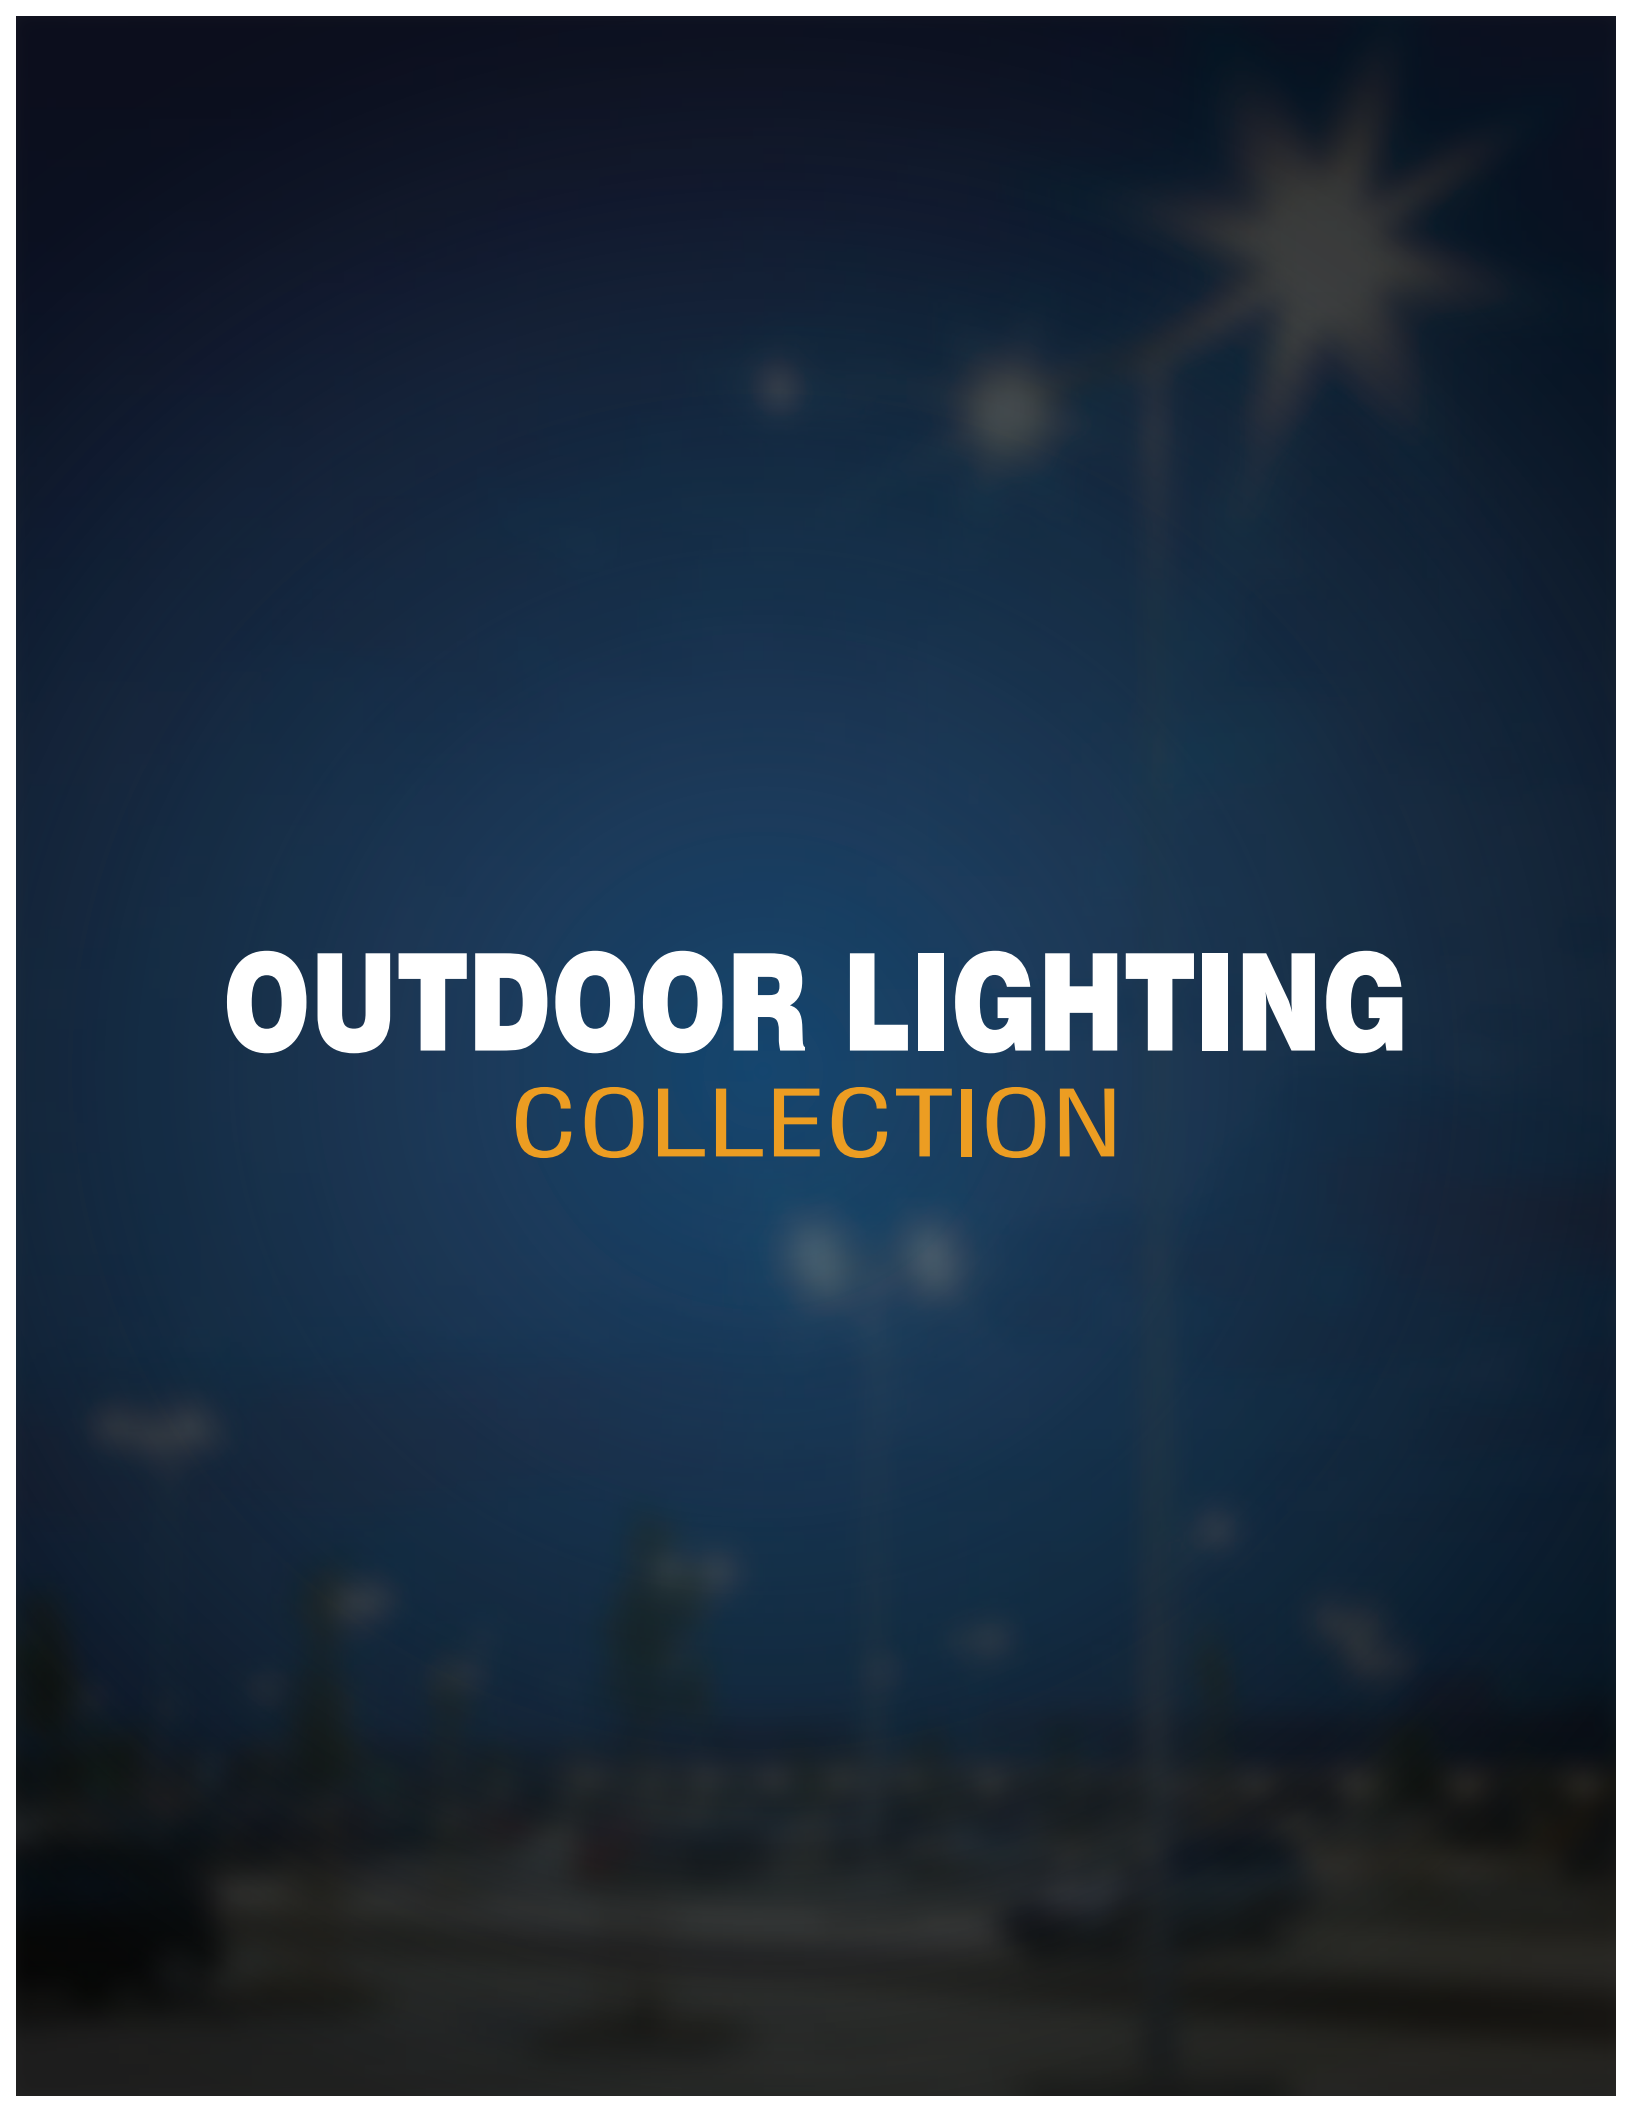A blurred night scene of a city street with palm trees and streetlights, serving as a background for the text.

OUTDOOR LIGHTING

COLLECTION

LED SHOEBOX LIGHT

SPECIFICATION

Family	SBBRIO				
Input	120-277V AC at 50/60Hz				
Dimming	No				
Power	100W	150W	200W	250W	300W
Lumens	13000LM	26000LM	19500LM	32500LM	39000LM
CCT	3000K ~ 6500K				
CRI	80				
FINISH	Black / Bronze				
OPTIONS	Emergency Backup Photocell Occupancy Sensor House Shield				



LED FLOOD LIGHT

SPECIFICATION

Family	FL2100			
Input	120-277V AC at 50/60Hz			
Dimming	No			
Power	50W	100W	150W	200W
Lumens	6500LM	13000LM	19500LM	26000LM
CCT	3000K ~ 6500K			
CRI	80			
FINISH	Black			
OPTIONS	Emergency Backup			



LED CANOPY LIGHT

SPECIFICATION


Family	CPGEN2	
Input	120-277V AC at 50/60Hz	
Dimming	No	
Power	65W	100W
Lumens	8450LM	13000LM
CCT	3000K ~ 6500K	
CRI	80	
FINISH	Black / Bronze	
OPTIONS	Emergency Backup Occupancy Sensor	



LED MINI WALLPACK

SPECIFICATION

Family	:	WPMINI
Input	:	120-277V AC at 50/60Hz
Dimming	:	No
Power	:	18W 25W
Lumens	:	2160LM 3000LM
CCT	:	3000K ~ 6500K
CRI	:	80
FINISH	:	Black
OPTIONS	:	Photocell or Without Photocell

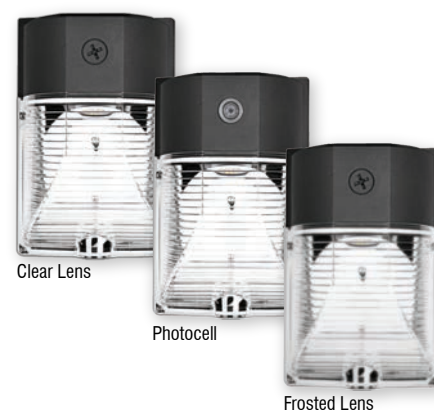

LED TRADITIONAL WALLPACK

SPECIFICATION

Family	:	WPGEN1
Input	:	120-277V AC at 50/60Hz
Dimming	:	No
Power	:	45W 60W 80W 100W 120W 150W
Lumens	:	5850LM 7800LM 10400LM 13000LM 15600LM 19500LM
CCT	:	3000K ~ 6500K
CRI	:	80
FINISH	:	Bronze
OPTIONS	:	Emergency Backup Photocell



LED ADJUSTABLE WALLPACK

SPECIFICATION

Family	:	WPADJ
Input	:	120-277V AC at 50/60Hz
Dimming	:	No
Power	:	80W 100W
Lumens	:	10400LM 13000LM
CCT	:	3000K ~ 6500K
CRI	:	80
FINISH	:	Black / Bronze
OPTIONS	:	Emergency Backup Photocell



LED FULL CUT-OFF WALLPACK

SPECIFICATION

Family	:	SBBRIO				
Input	:	120-277V AC at 50/60Hz				
Dimming	:	No				
Power	:	100W	150W	200W	250W	300W
Lumens	:	13000LM	26000LM	19500LM	32500LM	39000LM
CCT	:	3000K ~ 6500K				
CRI	:	80				
FINISH	:	Black / Bronze				
OPTIONS	:	Emergency Backup Photocell House Shield				



LED POST TOP LIGHT

SPECIFICATION

Family	:	PTDECO
Input	:	120-277V AC at 50/60Hz
Dimming	:	Yes
Power	:	100W
Lumens	:	13000LM
CCT	:	3000K ~ 6500K
CRI	:	80
FINISH	:	Silver
DISTRIBUTION	:	Type-2 Type-3 Type-4 Type-5 (Default)



LED BOLLARD LIGHT

SPECIFICATION

Family	:	BL2300
Input	:	120-277V AC at 50/60Hz
Dimming	:	No
Power	:	20W
Lumens	:	2500LM
CCT	:	3000K ~ 6500K
CRI	:	80
FINISH	:	Black / Bronze
DISTRIBUTION	:	Symmetric



LED WALL WASHER

SPECIFICATION

Family	: WWGEN2
Input	: 120-277V AC at 50/60Hz
Dimming	: Yes
Power	: 45W
Lumens	: 5850LM
CCT	: 3000K ~ 6500K Blue Green RGB (Tunable)
CRI	: 80
FINISH	: Bronze
OPTIONS	: Emergency Backup Photocell House Shield



LED UP & DOWN LIGHT

SPECIFICATION

Family	: UPDNDH
Input	: 120-277V AC at 50/60Hz
Dimming	: No
Power	: 24W 36W 24W 36W 48W 72W
Lumens	: 2400LM 3600LM 2400LM 3600LM 4800LM 7200LM
CCT	: RGB (Tunable) Red Green Blue Yellow Pink White Violet
CRI	: 80
Finish	: Black
Beam Angle	: 15° (Default) Customized Beam Angle on Request



LED UP OR DOWN LIGHT

SPECIFICATION

Family	: UPDNSH
Input	: 120-277V AC at 50/60Hz
Dimming	: No
Power	: 18W 24W 36W
Lumens	: 1800LM 2400LM 3600LM
CCT	: RGB (Tunable) Red Green Blue Yellow Pink White Violet
CRI	: 80
Finish	: Black
Beam Angle	: 15° (Default) Customized Beam Angle on Request



LED IN-GROUND LIGHT

SPECIFICATION

Family	: IG2600
Input	: 120-277V AC at 50/60Hz
Dimming	: No
Power	: 24W
Lumens	: 1920LM
CCT	: 3000K ~ 6500K
CRI	: 80
FINISH	: Silver
BEAM ANGLE	: 6° (Default) Customized Beam Angle on Request



LED STEP LIGHT

SPECIFICATION

Family	: STPSGH
Input	: 120V AC at 60Hz
Dimming	: No
Power	: 2W
Lumens	: 100LM
CCT	: 3000K
Trim Style	: Horizontal Recessed
Finish	: Black
Installation	: Fits Standard Single Gang Junction Box



LED STRING LIGHT

SPECIFICATION

Family	: STRING
Input	: 120V AC at 60Hz
Dimming	: Yes (With Dimmable Bulbs)
Length	: 24FT
Cord Type	: 16AGW SJTW
Socket Type	: E26
Socket Spacing	: 1.8FT
Total Sockets	: 12
Maximum Run	: 60 strings with 0.7W Bulbs



LED VAPOR TIGHT

SPECIFICATION

Family	:	VT1800
Size	:	4FT
Input	:	120V-277V AC at 50/60Hz
Dimming	:	Yes
Power	:	60W
Lumens	:	7500LM
CCT	:	3000K ~ 6500K
CRI	:	80
Finish	:	White
Options	:	Emergency Backup Occupancy sensor



LED VAPOR TIGHT - JELLY JAR

SPECIFICATION

Family	:	VTJJAR
Input	:	120V-277V AC at 50/60Hz
Dimming	:	No
Power	:	10W 22W
Lumens	:	800LM 1900LM
CCT	:	4000K ~ 6500K
CRI	:	80
Finish	:	Gray
Mounting	:	Ceiling Mount Wall Mount



Ceiling Mount

Wall Mount




LED NEON LIGHT

SPECIFICATION


Family	: NEON
Input	: 120V AC at 60Hz
Dimming	: Yes
Power	: 0.24W Per LED
LED	: 60LED's Per Meter
CCT	: RGB RGBW (All Colors with Shades of White) Red Green Blue
LENGTH	: 25 or 50 Meter Per Roll
FINISH	: White
SMD CHIP	: 5050



NEON ACCESSORIES

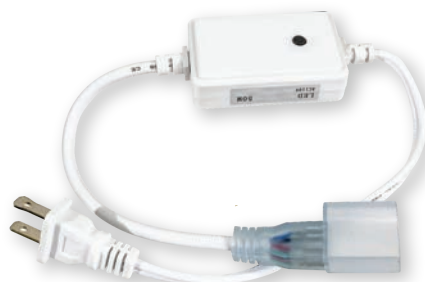

Additional Power Supply
(50MT Max)

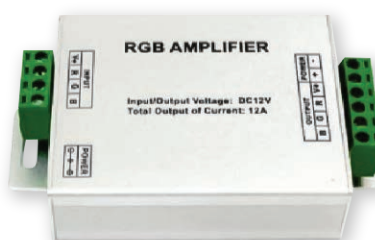


RGB Amplifier



RGB RF Controller



Female To Female Extension
(For RGB)



Female To Female Extension
(For Single Color)



End Caps
(2 Pcs Per Set)



Mounting Clips
(3 Pcs Per Foot)



Mounting Channel
(1MT Length)

LED STRIP LIGHTS

SPECIFICATION

Family	: STRIP	TAPE
Input	: 24V DC	120V AC
Dimming	: Yes	
Power	: 4.87W Per FT	3.35W Per FT
Lumens	: 579 LM Per FT	High Lumens
LED	: 42 LED's Per FT	18 LED's Per FT
CCT	: 3000K ~ 6500K RGB RGBW (All Colors with Shades of White)	
CRI	: 90	
Cuttable	: Yes (Every 2")	Yes (Every 1.64")
Length	: 65.61 FT	164 FT
SMD CHIP	: 5050	




STRIP ACCESSORIES



120V Power Plug for
Tape Light




Power Supply for 24V Strip Light
Input: 120V-277V AC
Output: 24V DC
Power: 60W~300W



Straight Connector




90° Connector

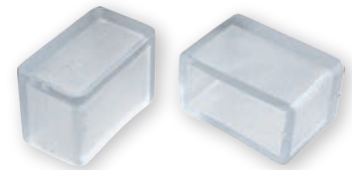


End Caps
(2 Pcs Per Set)



PVC Channel
(1MT Length)

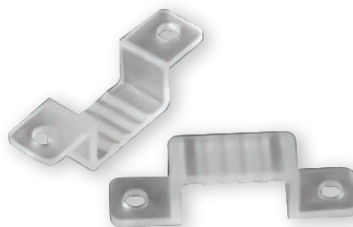

Mounting Clips
(2 Pcs Per Set)

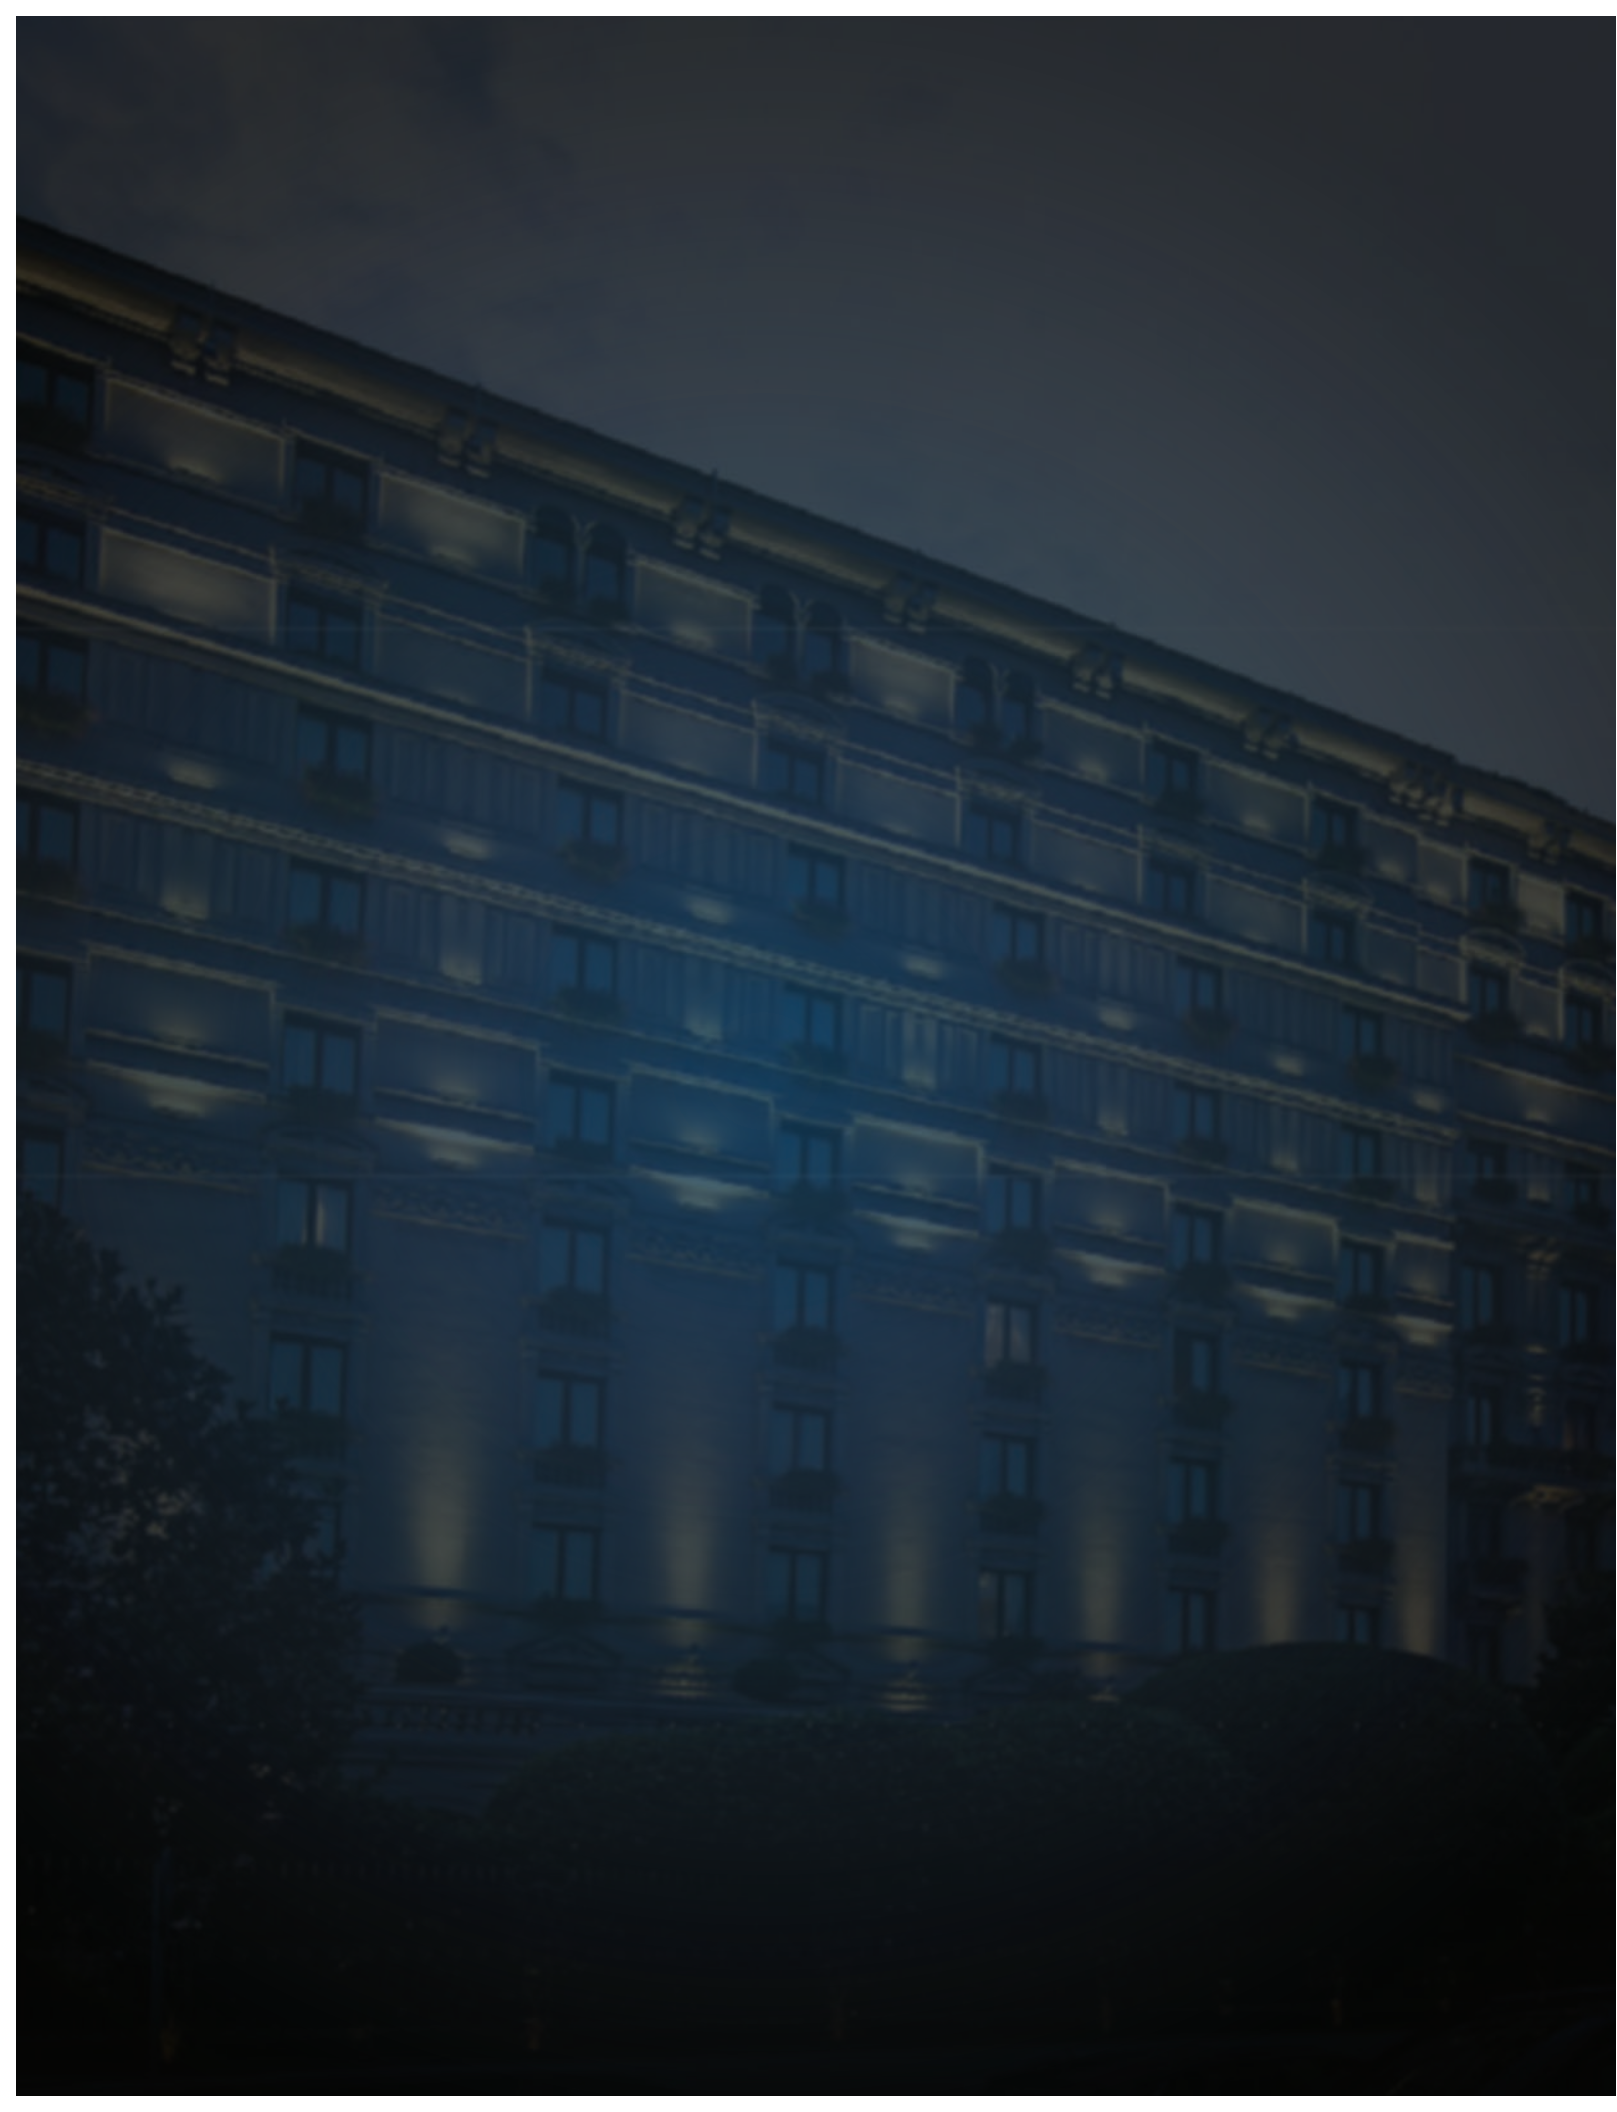



INDOOR LIGHTING **COLLECTION**

LED RETROFIT DOWNLIGHT

SPECIFICATION

Family	:	RDL004	RDL006
Size	:	4"	6"
Input	:	120V AC at 60Hz	
Dimming	:	Yes	
Power	:	14W	
Lumens	:	1120LM	
CCT	:	5CCT (27K/30K/40K/50K/65K)	
CRI	:	90	
FINISH	:	White (Other Finish On Request)	
Options	:	Emergency Backup	



LED DISK LIGHT

SPECIFICATION

Family	:	DISK04	DISK04
Size	:	4"	6"
Input	:	120V AC at 60Hz	
Dimming	:	Yes	
Power	:	12W	15W
Lumens	:	840LM	1050LM
CCT	:	5CCT (27K/30K/40K/50K/65K)	
CRI	:	90	
Finish	:	White (Other Finish On Request)	
Options	:	Emergency Backup	



IP65 LED DOWNLIGHT

SPECIFICATION

Family	:	DLIP65	
Size	:	4"	6"
Input	:	120V AC at 60Hz	
Dimming	:	Yes	
Power	:	12W	28W
Lumens	:	960LM	2240LM
CCT	:	5CCT (27K/30K/40K/50K/65K)	
CRI	:	80	
Finish	:	White (Other Finish On Request)	
Options	:	Emergency Backup	



LED RECESSED DOWNLIGHT

SPECIFICATION

Family	: DL1100
Size	: 6"
Input	: 120V AC at 60Hz
Dimming	: No
Power	: 22W
Lumens	: 2200LM
CCT	: 3000K - 6500K
CRI	: 80
Finish	: White (Other Finish On Request)



LED ULTRA THIN PANEL LIGHT (ROUND)

SPECIFICATION

Family	: USPLRD
Size	: 6" 7" 8"
Input	: 120V AC at 60Hz
Dimming	: Yes
Power	: 12W 15W 18W
Lumens	: 960LM 1200LM 1440LM
CCT	: 5CCT
CRI	: 80
Finish	: White (Other Finish On Request)



LED ULTRA THIN PANEL LIGHT (SQUARE)

SPECIFICATION


Family	: USPLSQ
Size	: 6" x 6" 7" x 7" 8" x 8"
Input	: 120V AC at 60Hz
Dimming	: Yes
Power	: 12W 15W 18W
Lumens	: 960LM 1200LM 1440LM
CCT	: 5CCT
CRI	: 80
Finish	: White (Other Finish On Request)



NEW ARCHITECTURAL DOWNLIGHT

SPECIFICATION

Family	DLARG2					
Size	4"			6"		
Input	120V-277V AC at 50/60Hz					
Dimming	Yes					
Power	13W	20W	25W	30W	42W	36W
Lumens	1040LM	1600LM	2000LM	1040LM	2000LM	1600LM
CCT	3000K~6500K					
CRI	90					
Reflector Finish	Clear White Haze					
Trim Finish	Self Flange White Self Flange No Flange					
Beam Angle	15° 36° (Default) 60° (Custom Beam Angle on Request)					
Options	Emergency Backup					

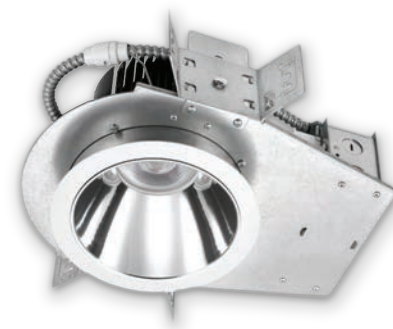

LED UNDER CABINET LIGHT

SPECIFICATION


Family	UC1400					
Size	9"	12"	18"	24"	34"	48"
Input	120V AC at 60Hz					
Dimming	Yes					
Power	4W	5W	8W	10W	15W	20W
Lumens	336LM	455LM	752LM	890LM	1380LM	1860LM
CCT	3000K ~ 6500K					
CRI	80					
Finish	White / Black / Bronze					
Options	Emergency Backup Occupancy sensor					



NEW CONSTRUCTION HOUSING

SPECIFICATION

Family	:	NCHSG4	NCHSG6
Size	:	4"	6"
Input	:	120V AC at 60Hz	
Construction	:	New	
Lamp	:	LED	
IC-Rated	:	Yes	
Air-Tight	:	Yes	

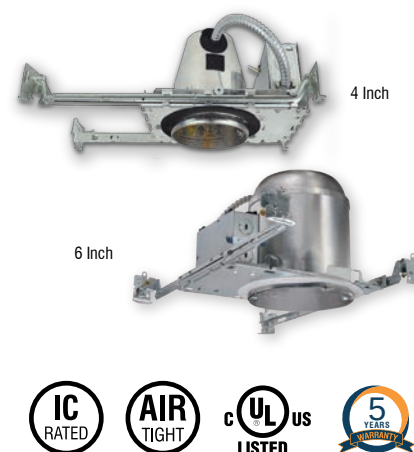

NEW CONSTRUCTION HOUSING - FIRE RATED

SPECIFICATION

Family	:	NCHSG4	NCHSG6
Size	:	4"	6"
Input	:	120V AC at 60Hz	
Construction	:	New	
Lamp	:	LED	
IC-Rated	:	Yes	
Air-Tight	:	Yes	
Fire-Rated	:	Yes (UL Certified 1Hr. to 2Hrs Fire Rated)	



NEW CONSTRUCTION MOUNTING PLATE

SPECIFICATION

Family	:	NCMP
Size	:	3" / 4" / 6" Universal Size
Cut Hole Shape	:	Round
Installation	:	Flat Asymmetric
IC-Rated	:	Yes



LED PANEL LIGHT

SPECIFICATION

Family	:	PL1X4	PL2X2	PL2X4
Size	:	1FT x 4FT	2FT x 2FT	2FT x 4FT
Input	:	120-277V AC at 50/60Hz		
Dimming	:	Yes		
Power	:	20W/ 30W/ 40W	20W/ 30W/ 40W	30W/ 40W/ 50W/ 60W
Lumens	:	2500LM ~ 5000LM	2500LM ~ 5000LM	2500LM ~ 5000LM
CCT	:	3000K ~ 6500K		
CRI	:	80		
Finish	:	White		
Options	:	Emergency Backup Occupancy sensor		



LED TROFFER LIGHT

SPECIFICATION


Family	:	CBT2X2	CBT2X4
Size	:	2FT x 2FT	2FT x 4FT
Input	:	120-277V AC at 50/60Hz	
Dimming	:	Yes	
Power	:	36W	50W
Lumens	:	4500LM	6250LM
CCT	:	3000K ~ 6000K	
CRI	:	80	
Finish	:	White	
Options	:	Emergency Backup Occupancy sensor	



LED GRID PANEL LIGHT

SPECIFICATION

Family	:	FP2X2	FP2X4
Size	:	2FT x 2FT	2FT x 2FT
Input	:	120-277V AC at 50/60Hz	
Dimming	:	Yes	
Power	:	40W	55W
Lumens	:	5000LM	6875LM
CCT	:	3000K ~ 6500K	
CRI	:	80	
Finish	:	White	
Options	:	Emergency Backup Occupancy sensor	

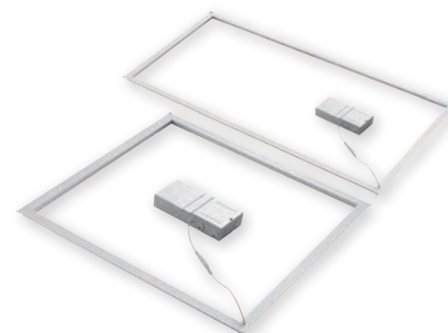

DOUBLE RING FLUSH MOUNT LIGHT

SPECIFICATION

Family	:	FMDBLR
Size	:	12" 14"
Input	:	120V AC at 60Hz
Dimming	:	Yes
Power	:	20W 28W
Lumens	:	2000LM 2800LM
CCT	:	3000K ~ 6500K
CRI	:	80
FINISH	:	Brushed Nickel Bronze
Options	:	Emergency Backup



LED SURFACE PANEL LIGHT (WHITE)

SPECIFICATION

Family	:	SFPL
Size	:	6" 8" 12"
Input	:	120V AC at 60Hz
Dimming	:	No
Power	:	12W 18W 22W 24W 30W
Lumens	:	1200LM 1800LM 2200LM 2400LM 3000LM
CCT	:	3000K ~ 6500K
CRI	:	80
Finish	:	White (Other Finish On Request)



LED SURFACE PANEL LIGHT - (ANODIZED)

SPECIFICATION

Family	:	SFAPL
Size	:	11.62"
Shape	:	Round or Square
Input	:	120V AC at 60Hz
Dimming	:	No
Power	:	15W 22W 30W
Lumens	:	1200LM 2200LM 3000LM
CCT	:	3000K ~ 6500K
CRI	:	80
Finish	:	Silver Anodized



LED TRACK LIGHT

SPECIFICATION

Family	:	TRK001		
Type	:	H-Type		
Input	:	120V-277V AC at 50/60Hz		
Dimming	:	Yes		
Power	:	15W	20W	30W
Lumens	:	1350LM	1800LM	2700LM
CCT	:	2700K~6500K		
CRI	:	90		
Finish	:	White Black		
Beam Angle	:	15° 24° 38° 60°		
Options	:	Honeycomb Louver Barndoors Adjustable Beam Angle		



TRACK ACCESSORIES



120V Single Circuit H-Track Rail
Length : 2FT | 4FT | 6FT | 8FT
Finish : White | Black




Live End Conduit
Finish : White | Black



Straight Connector
Finish : White | Black



T - Connector
Finish : White | Black



X - Connector
Finish : White | Black



Floating Feed
Finish : White | Black



Suspension Kit
Finish : White | Black

LED T8 TUBE - G13 BASE

SPECIFICATION

Family	:	T8TUBE
Size	:	2FT 3FT 4FT
Input	:	120V - 277V AC at 50/60Hz
Dimming	:	Yes
Power	:	10W 12W 18W
Lumens	:	1200LM 1440LM 2160LM
CCT	:	3000K ~ 6500K
CRI	:	80
Base Type	:	G13 Base
Finish	:	White with Clear Lens



LED T8 TUBE - FA8 BASE

SPECIFICATION

Family	:	T8TUBE
Size	:	8FT
Input	:	120V - 277V AC at 50/60Hz
Dimming	:	Yes
Power	:	40W
Lumens	:	4800LM
CCT	:	3000K ~ 6500K
CRI	:	80
Base Type	:	FA8 Base
Finish	:	White with Clear Lens



LED SIGN TUBE LIGHT

SPECIFICATION

Family	:	T8SIGN
Size	:	4FT 5FT 6FT 7FT 8FT 10FT
Input	:	120V - 277V AC at 50/60Hz
Dimming	:	Yes
Power	:	21W 28W 28W 28W 28W 28W
Lumens	:	1200LM 2200LM 2200LM 2200LM 2200LM 2200LM
CCT	:	6500K
CRI	:	80
Base Type	:	RI7D Base
Finish	:	White with Clear Lens



LED LIGHT BULB - E26 BASE

SPECIFICATION

Family	:	LBE26
Input	:	120V AC at 60Hz
Dimming	:	No
Power	:	9W 12W 15W
Lumens	:	720LM 960LM 1200LM
CCT	:	2700K ~ 6500K
CRI	:	80
Base Type	:	E26
Options	:	Occupancy Sensor Photocell (On Request)
Beam Angle	:	240°



LED LIGHT BULB - GU24 BASE

SPECIFICATION

Family	:	LBGU24
Bulb Shape	:	GU24
Dimming	:	No
Power	:	9W
Lumens	:	720LM
CCT	:	2700K ~ 6500K
CRI	:	80
Base Type	:	E26
Options	:	Occupancy Sensor Photocell (On Request)
Beam Angle	:	240°



LED LINEAR LIGHT

SPECIFICATION

Family	LIN1800			
Size	2FT	4FT	6FT	8FT
Input	120-277V AC at 50/60Hz			
Dimming	Yes			
Power	20W	40W	60W	80W
Lumens	2400LM	4800LM	7200LM	9600LM
CCT	3000K ~ 6500K			
CRI	80 / 90			
Finish	White (Other Finish on Request)			
Options	Emergency Backup Occupancy Sensor			



LED WRAP LIGHT

SPECIFICATION

Family	WRPRDS			
Size	2FT		4FT	
Input	120-277V AC at 50/60Hz			
Dimming	Yes			
Power	20W	32W	40W	48W
Lumens	2600LM	4160LM	5200LM	6240LM
CCT	3CCT (30K/40K/50K)			
CRI	80			
Finish	White			
Options	Emergency Backup Occupancy Sensor			



LED STRIP LIGHT

SPECIFICATION

Family	LNRSTP			
Size	4FT		8FT	
Input	120-277V AC at 50/60Hz			
Dimming	Yes			
Power	20W	35W	64W	90W
Lumens	2600LM	4550LM	8320LM	11700LM
CCT	3CCT (30K/40K/50K)			
CRI	80			
Finish	White			
Options	Emergency Backup Occupancy Sensor			



LED LINEAR HIGH BAY LIGHT

SPECIFICATION

Family	:	HBLINR
Size	:	4FT
Input	:	120-277V AC at 50/60Hz
Dimming	:	Yes
Power	:	165W 325W
Lumens	:	21,450LM 42,250LM
CCT	:	4000K ~ 6500K
CRI	:	80
Finish	:	White
Options	:	Emergency Backup Occupancy sensor



LED UFO LIGHT

SPECIFICATION

Family	:	HBUFO
Input	:	120-277V AC at 50/60Hz
Dimming	:	Yes
Power	:	100W 200W
Lumens	:	13,000LM 26,000LM
CCT	:	4000K ~ 6500K
CRI	:	80
Finish	:	Black
Options	:	Emergency Backup Occupancy sensor






LED BATHROOM **LIGHTING**

ILLUMINATED MIRROR - 2FT X 3FT

SPECIFICATION


Family	:	IMLURE
Size	:	2FT x 3FT
Input	:	120V-277V AC at 50/60Hz
Dimming	:	No
Power	:	76W
Lumens	:	6384LM
CCT	:	3000K ~ 6500K
CRI	:	90
Defogger	:	Yes
Options	:	On/Off Touch Switch (On Request)



ILLUMINATED MIRROR - 3FT X 3FT

SPECIFICATION


Family	:	IMLURE
Size	:	3FT x 3FT
Input	:	120V-277V AC at 50/60Hz
Dimming	:	No
Power	:	90W
Lumens	:	7560LM
CCT	:	3000K ~ 6500K
CRI	:	90
Defogger	:	Yes
Options	:	On/Off Touch Switch (On Request)



ILLUMINATED MIRROR - 4FT X 3FT

SPECIFICATION

Family	:	IMLURE
Size	:	4FT x 3FT
Input	:	120V-277V AC at 50/60Hz
Dimming	:	No
Power	:	106W
Lumens	:	8904LM
CCT	:	3000K ~ 6500K
CRI	:	90
Defogger	:	Yes
Options	:	On/Off Touch Switch (On Request)

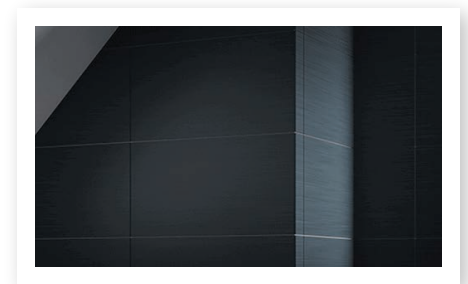

LED VANITY LIGHT

SPECIFICATION

Family	:	VL9001	VL9002
Size	:	3FT	4FT
Input	:	120V-277V AC at 50/60Hz	
Socket Type	:	T8	
No. of Sockets	:	2 x T8 Tubes	
Max Power Per Socket	:	60W	
Connection Type	:	1280LM	
Finish	:	White Acrylic Diffuser With Brushed Nickel Finish	



LED VANITY LIGHT

SPECIFICATION

Family	:	VL9003	VL9005
Size	:	2FT	3FT
Input	:	120V AC at 50/60Hz	
Dimming	:	No	
Power	:	26W	36W
Lumens	:	2080LM	2880LM
CCT	:	3000K ~ 6500K	
CRI	:	80	
Finish	:	White Acrylic Diffuser with Brushed Nickel Finish	



LED VANITY LIGHT

SPECIFICATION

Family	:	VL9007	VL9008
Size	:	2FT	3FT
Input	:	120V AC at 50/60Hz	
Dimming	:	Yes	
Power	:	17W	25W
Lumens	:	1760LM	2560LM
CCT	:	3000K ~ 4000K	
CRI	:	80	
Finish	:	White Acrylic Diffuser with Brushed Nickel Finish	



EXHAUST FAN - FLOW

SPECIFICATION

Family	:	EFFLOW
Size	:	8" x 8"
Input	:	120V AC at 60Hz
Dimming	:	No
Power	:	42W (30W Motor + 12W LED)
Lumens	:	960LM
CCT	:	3000K ~ 6500K
CRI	:	80
Finish	:	White
Air Flow Capacity	:	100 CFM




EXHAUST FAN - STREAM

SPECIFICATION

Family	:	EFSTRM
Size	:	10" x 10"
Input	:	120V AC at 60Hz
Dimming	:	No
Power	:	45W (30W Motor + 15W LED)
Lumens	:	960LM
CCT	:	3000K ~ 6500K
CRI	:	80
Finish	:	White
Air Flow Capacity	:	100 CFM



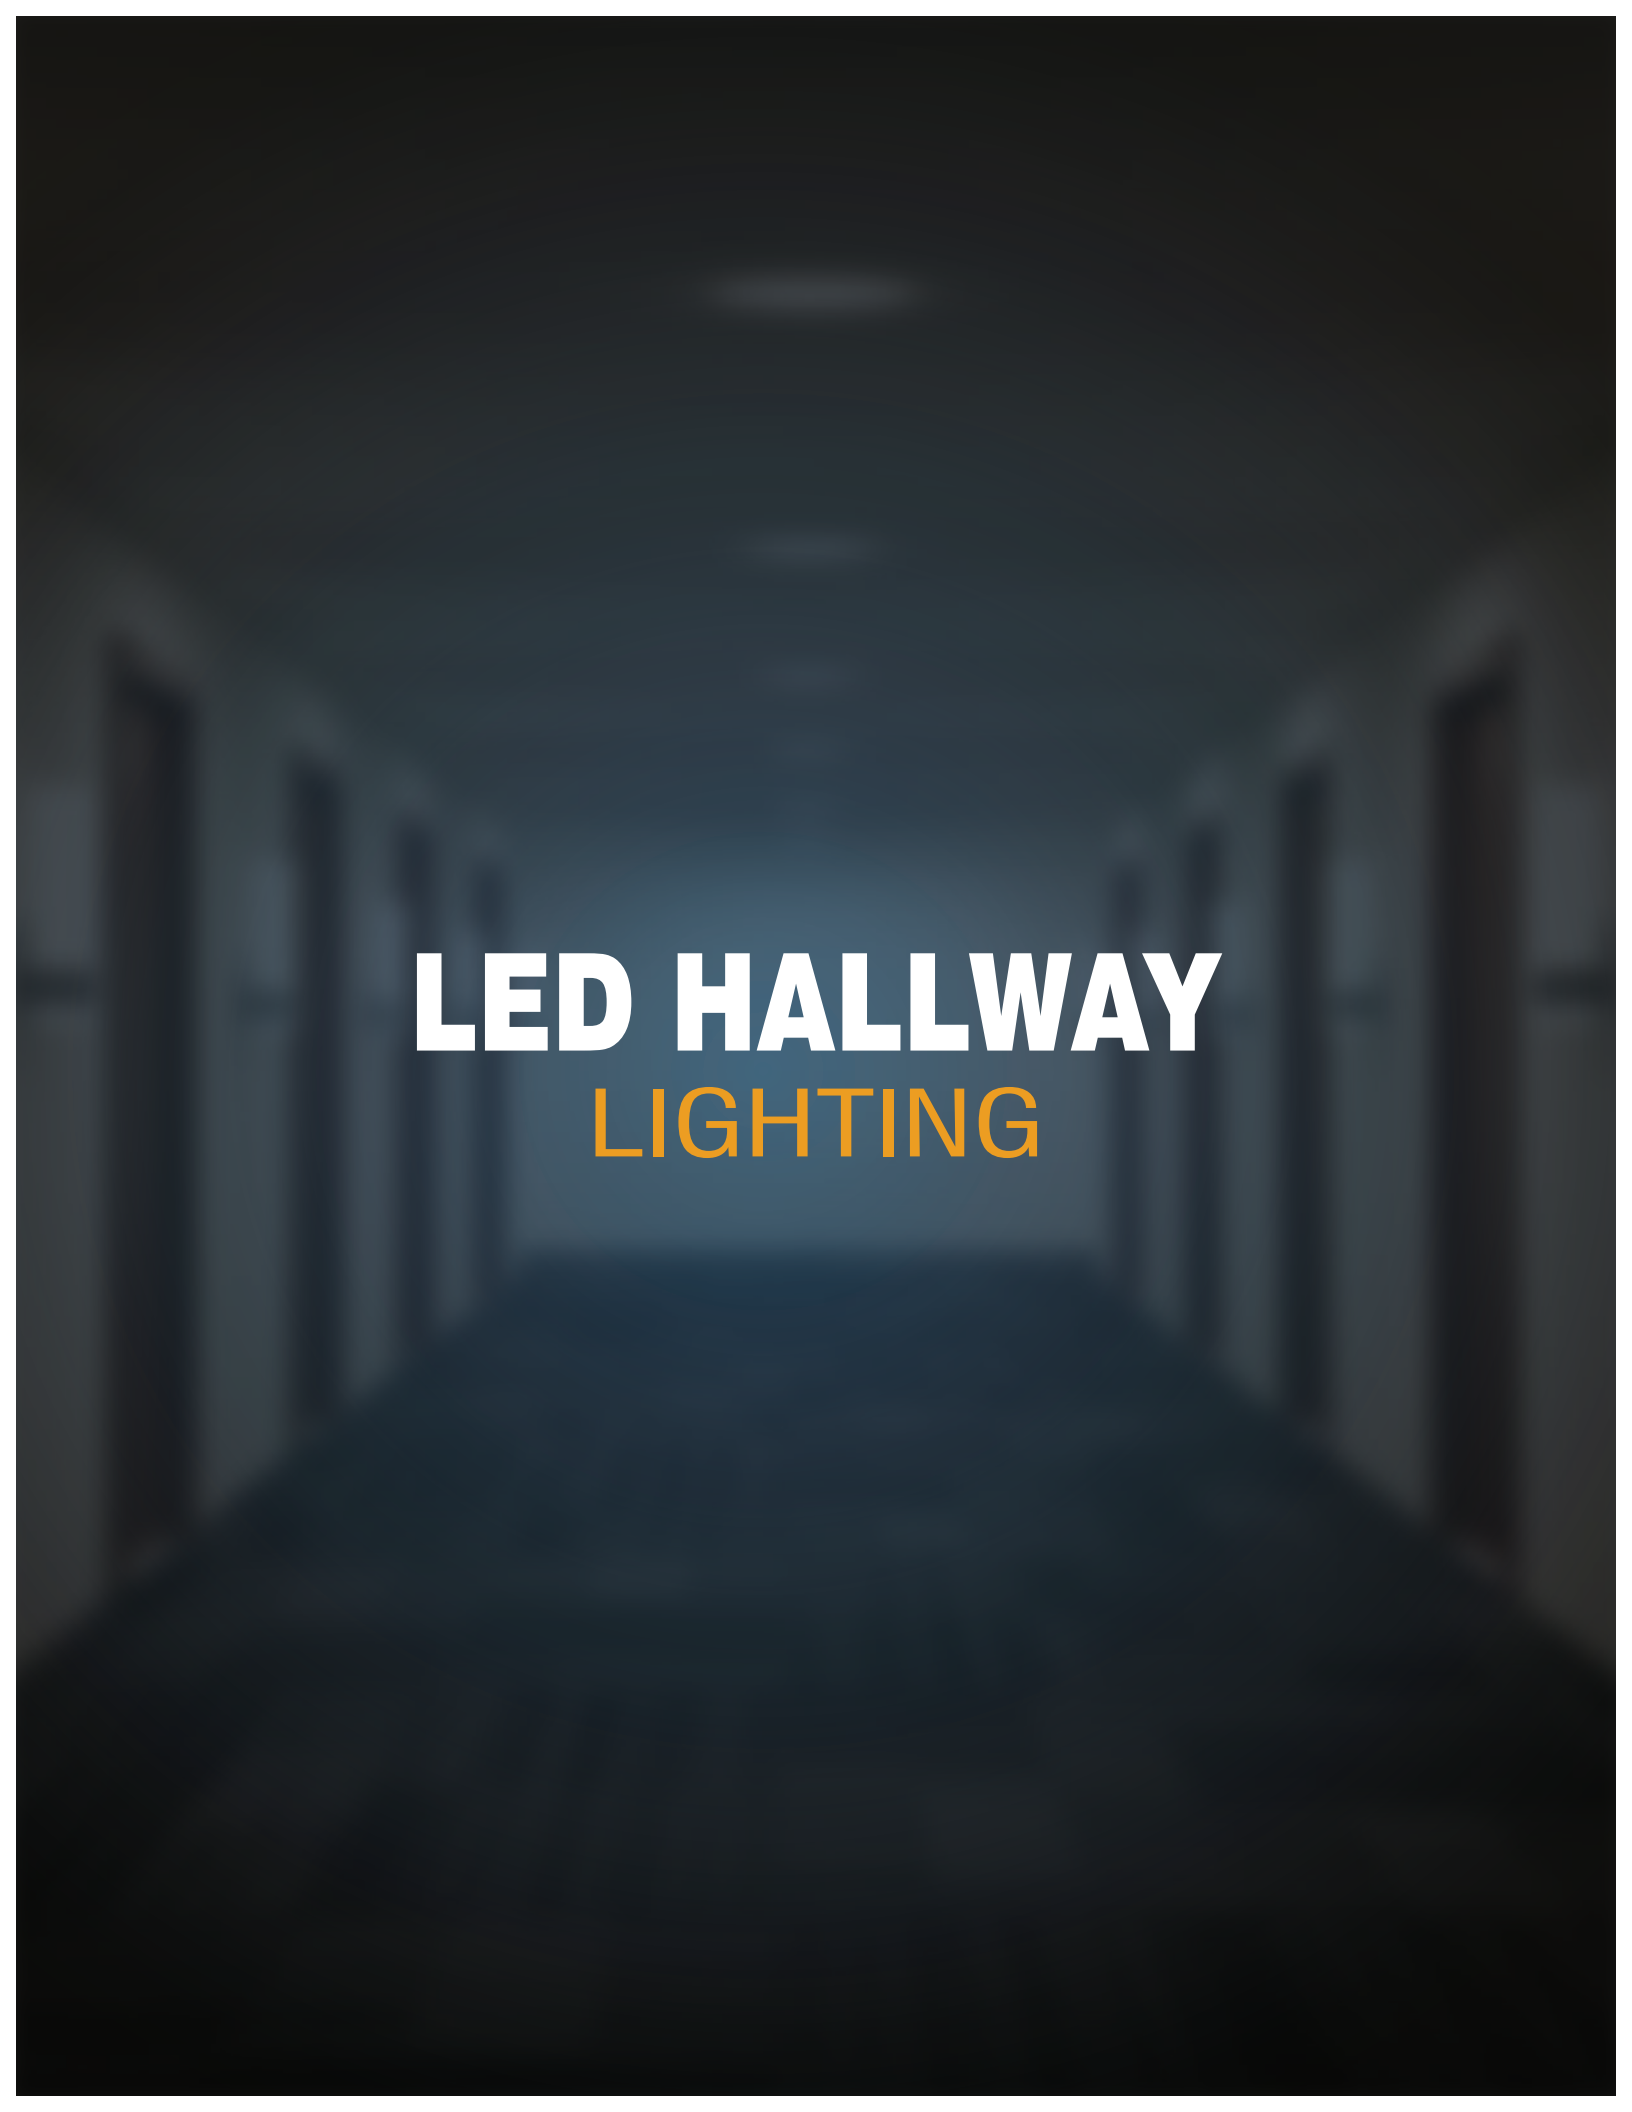

LED HALLWAY LIGHTING

LED WALL SCNCE - 1001

SPECIFICATION

Family	: WS1001
Input	: 120V AC at 60Hz
Dimming	: No
Power	: 16W
Lumens	: 1280LM
CCT	: 3000K ~ 6500K
CRI	: 80
Finish	: White Acrylic Shade with Bronze
Options	: Emergency Backup Occupancy sensor



LED WALL SCNCE - 1002

SPECIFICATION

Family	: WS1002
Input	: 120V AC at 60Hz
Dimming	: No
Power	: 16W
Lumens	: 1280LM
CCT	: 3000K ~ 6500K
CRI	: 80
Finish	: White Acrylic Shade with Chrome Finish
Options	: Emergency Backup Occupancy sensor



LED WALL SCNCE - 1003

SPECIFICATION

Family	: WS1003
Input	: 120V AC at 60Hz
Dimming	: No
Power	: 16W
Lumens	: 1280LM
CCT	: 3000K ~ 6500K
CRI	: 80
Finish	: White Glass Shade with Chrome Finish
Options	: Emergency Backup Occupancy sensor



LED WALL SCNCE - 1004

SPECIFICATION

Family	: WS1004
Input	: 120V AC at 60Hz
Dimming	: No
Power	: 16W
Lumens	: 1280LM
CCT	: 3000K ~ 6500K
CRI	: 80
Finish	: White Acrylic Shade with Bronze
Options	: Emergency Backup Occupancy sensor



LED WALL SCNCE - 1005

SPECIFICATION

Family	: WS1005
Input	: 120V AC at 60Hz
Dimming	: Yes
Power	: 12W
Lumens	: 1200LM
CCT	: 3000K ~ 5000K
CRI	: 80
Finish	: White Acrylic Shade with Silver/Bronze Finish
Options	: Emergency Backup Occupancy sensor





LED WALL SCNCE - 1006

SPECIFICATION

Family	: WS1006
Input	: 120V AC at 60Hz
Dimming	: No
Power	: 2 x 8W In-Built LED
Lumens	: 1280LM
CCT	: 3000K ~ 6500K
CRI	: 80
Finish	: White Acrylic Shade with Chrome Finish
Options	: N/A



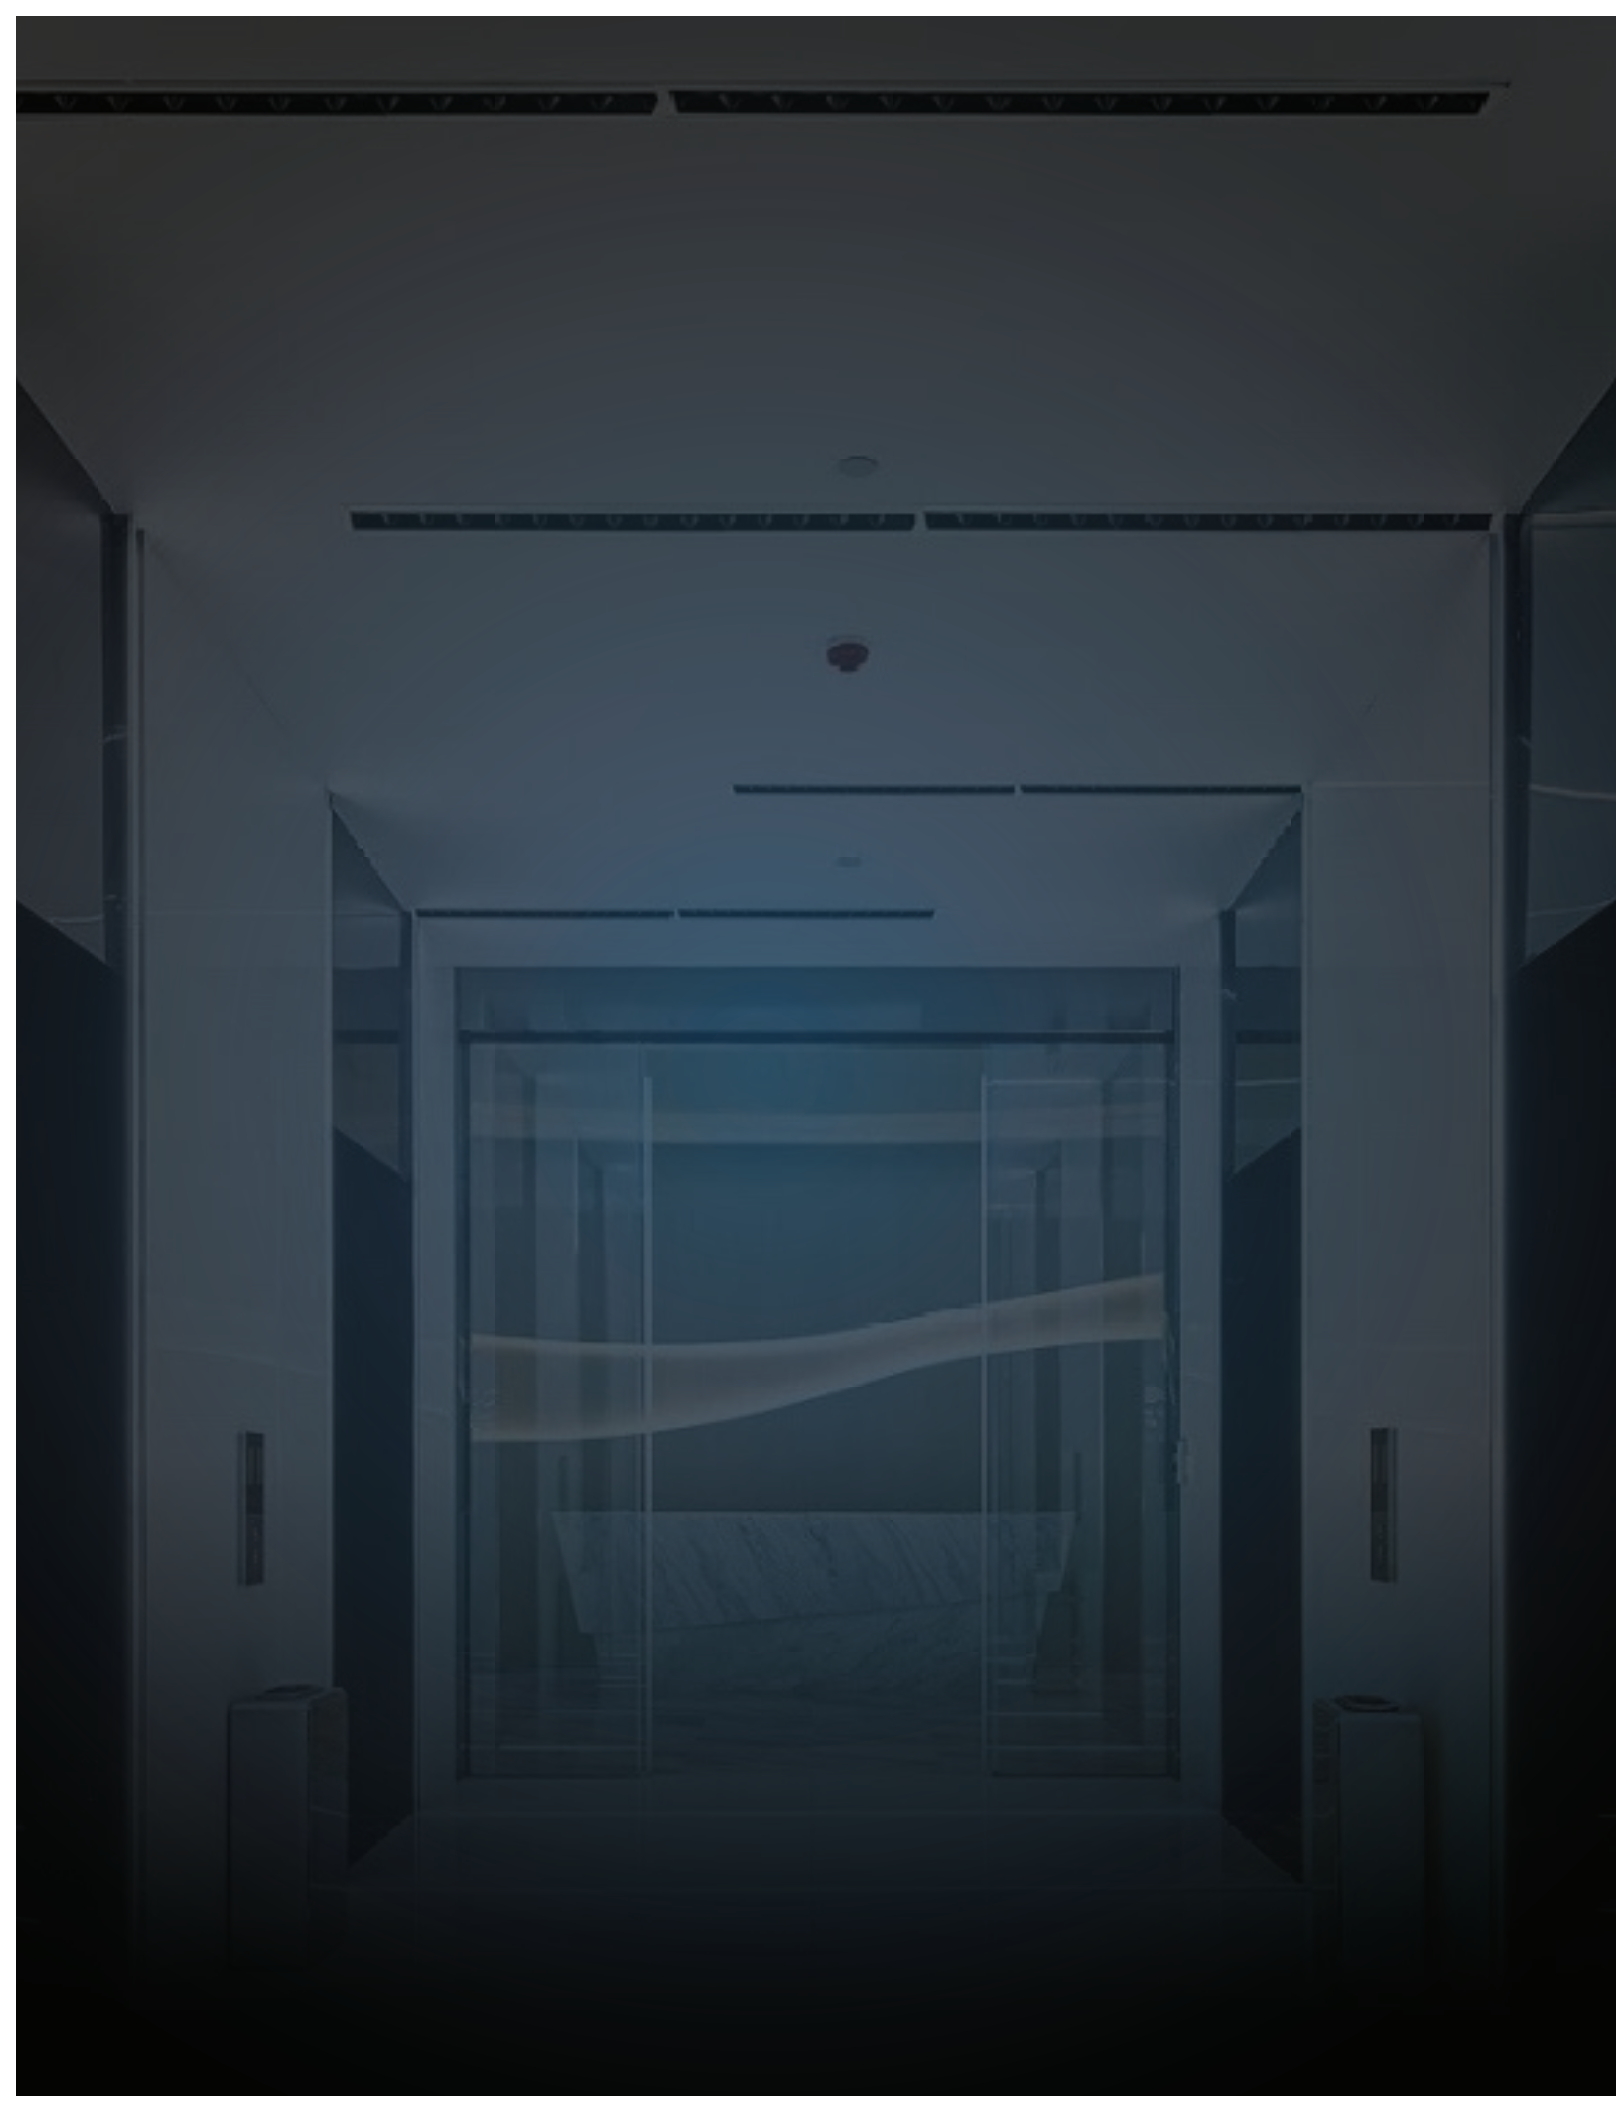

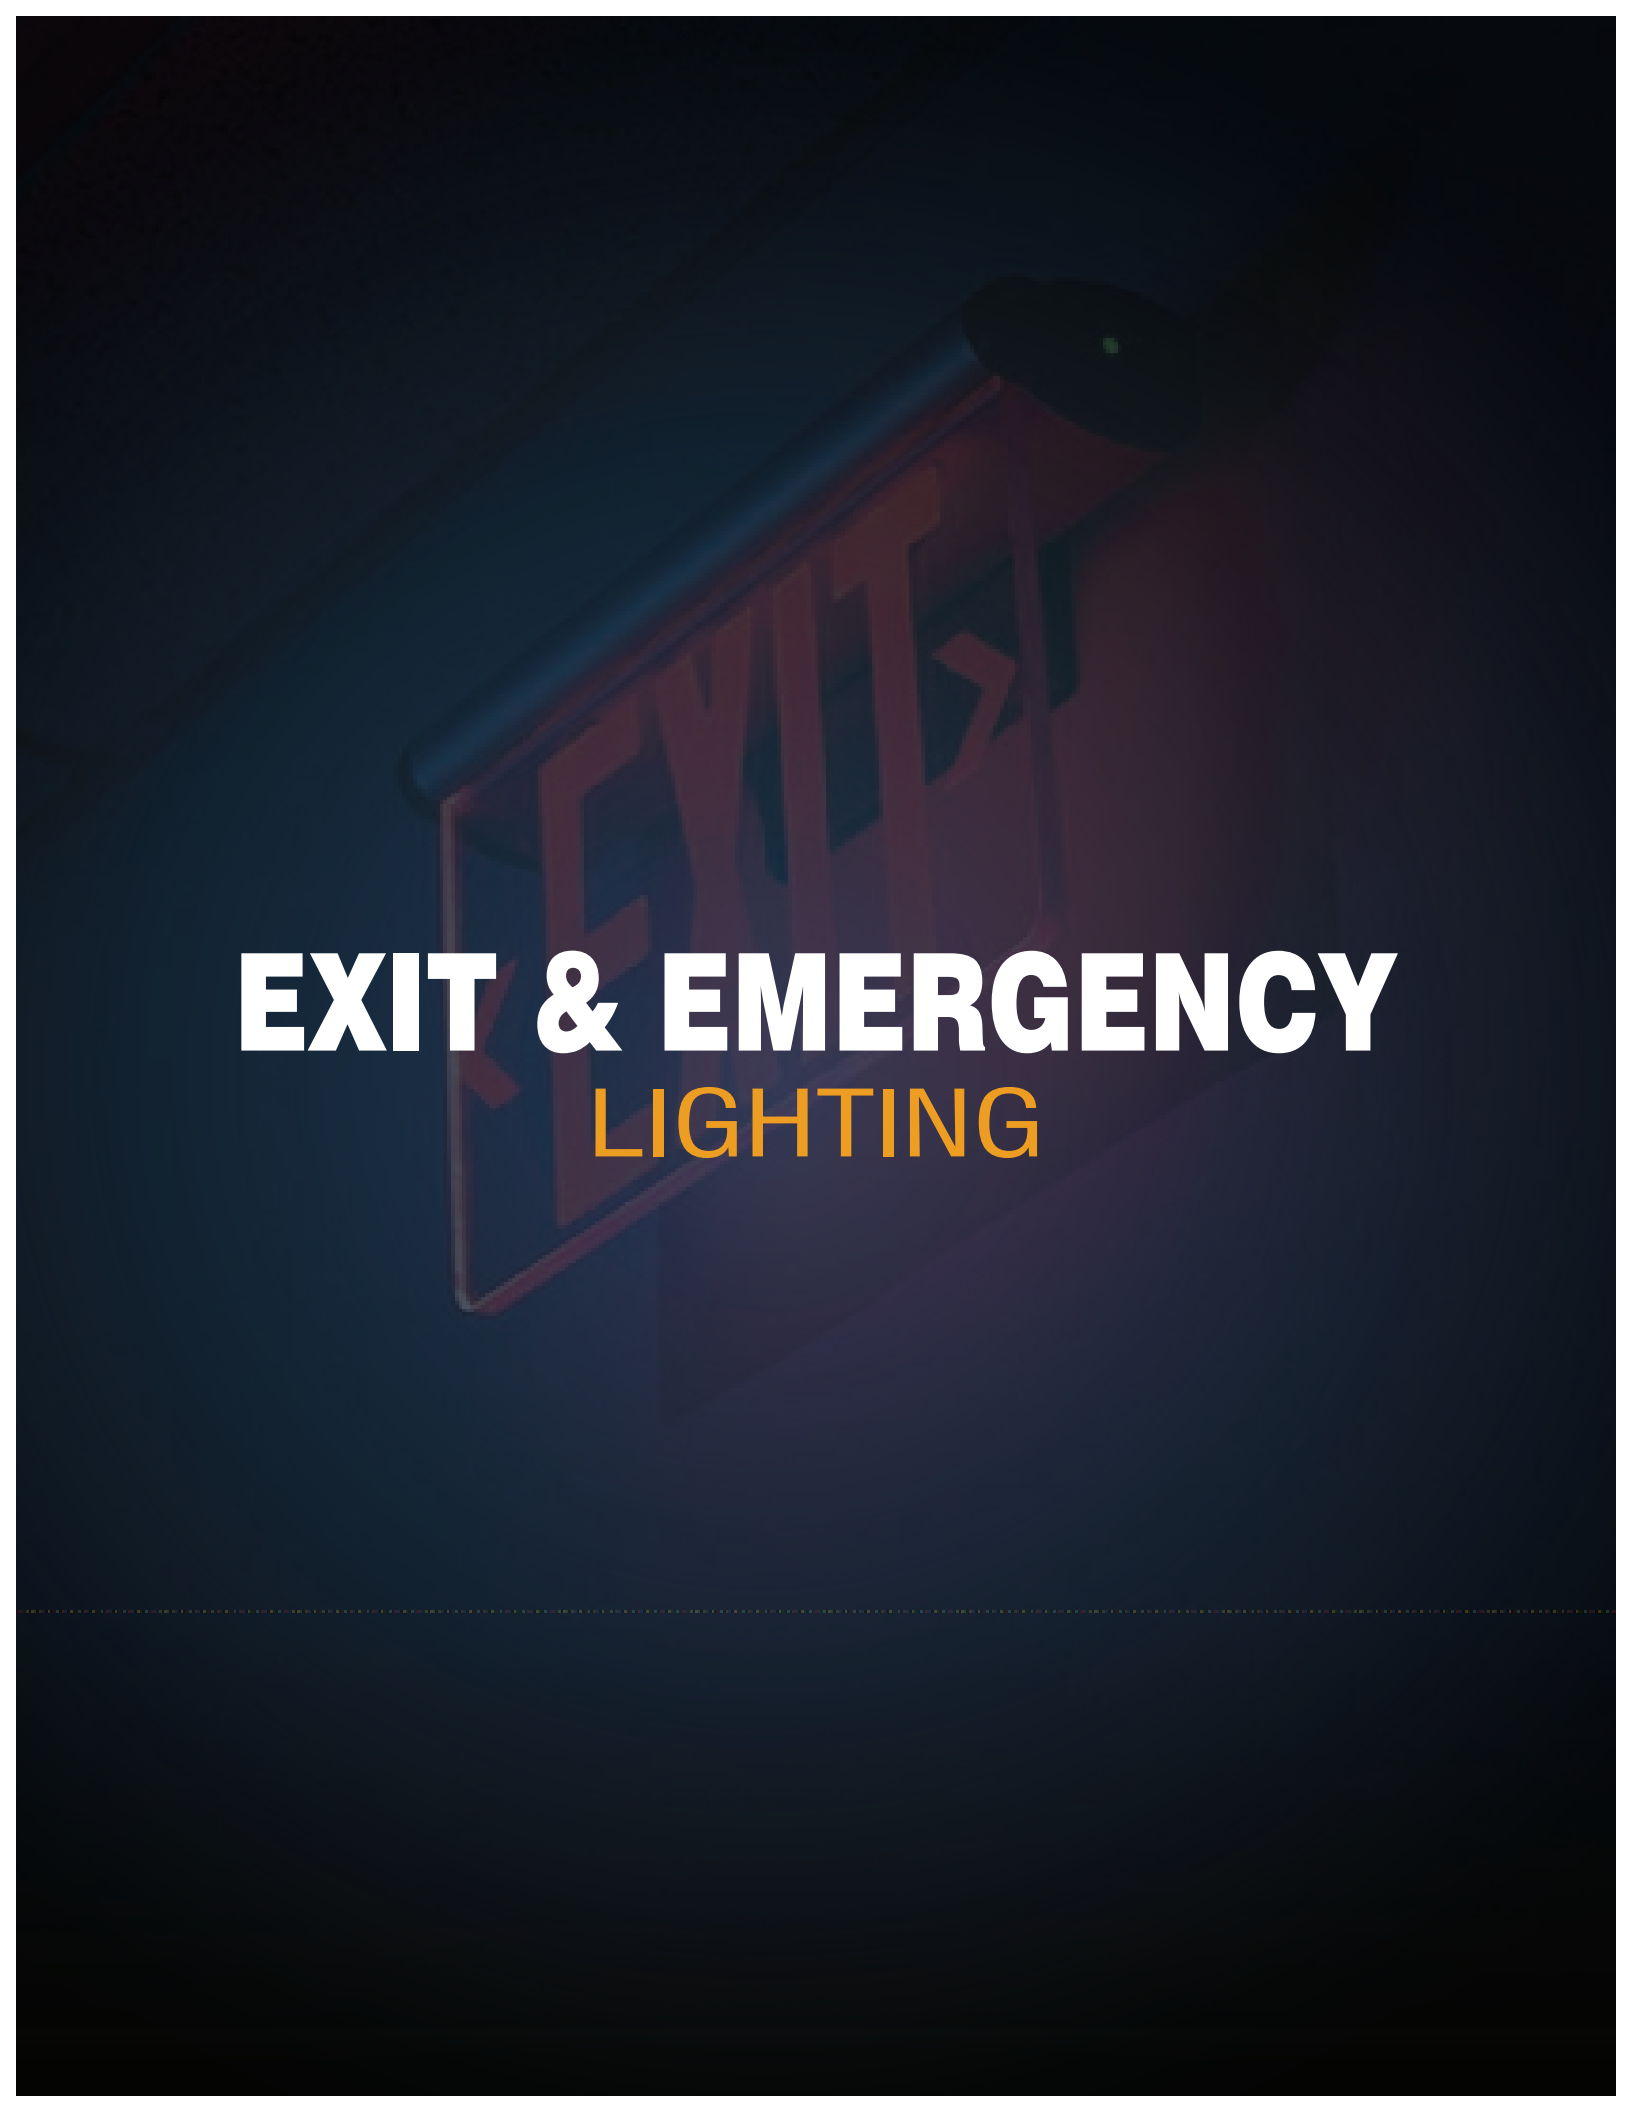

EXIT & EMERGENCY LIGHTING

EDGE-LIT EXIT LIGHT

SPECIFICATION

Family	: EXEDGE
Input	: 120/277V AC at 50/60Hz
Power	: 5W
Face Type	: Single Face Double Face
Panel Type	: Clear Acrylic White Acrylic
Letter Size	: 6 Inches
Letter Color	: Red
Housing	: Brushed Aluminum
Mounting	: Universal
Emergency Operation	: 90+ Minutes on Power Failure



WET LOCATION EXIT LIGHT

SPECIFICATION

Family	: EXTWR
Input	: 120/277V AC at 50/60Hz
Power	: 5W
Face Type	: Single Face or Double Face
Letter Size	: 6 Inches
Letter Color	: Red Green
Housing	: White ABS Thermoplastic
Mounting	: Universal
Emergency Operation	: 90+ Minutes on Power Failure



LED EXIT LIGHT WITH EMERGENCY HEADS

SPECIFICATION

Family	: EXWEM2
Input	: 120/277V AC
Power	: 1W x 2 Heads
Face Type	: Single Face or Double Face
Letter Size	: 6 Inches
Letter Color	: Red or Green
Lamp Heads	: 2 Heads Side Mounted
Housing	: White ABS Thermoplastic
Mounting	: Universal
Emergency Operation	: 90+ Minutes on Power Failure



DUAL HEAD EMERGENCY LIGHT

SPECIFICATION

Family	:	EM2400
Input	:	120/277V AC at 50/60 Hz
Power	:	9W (1.5W x 2 Heads)
Head Type	:	Twin Head Adjustable
Housing	:	White ABS Thermoplastic
Mounting	:	Universal
Testing	:	Manual
Emergency Operation	:	90+ Minutes on Power Failure




ARCHITECTURAL EMERGENCY LIGHT

SPECIFICATION

Family	:	EMOVAL
Input	:	120/277V AC at 50/60Hz
Power	:	12W
Lumens	:	1286LM
CCT	:	5000K
Housing	:	Die Cast Aluminum
Finish	:	Dark Bronze
Mounting	:	Wall or Ceiling
Emergency Operation	:	90+ Minutes on Power Failure





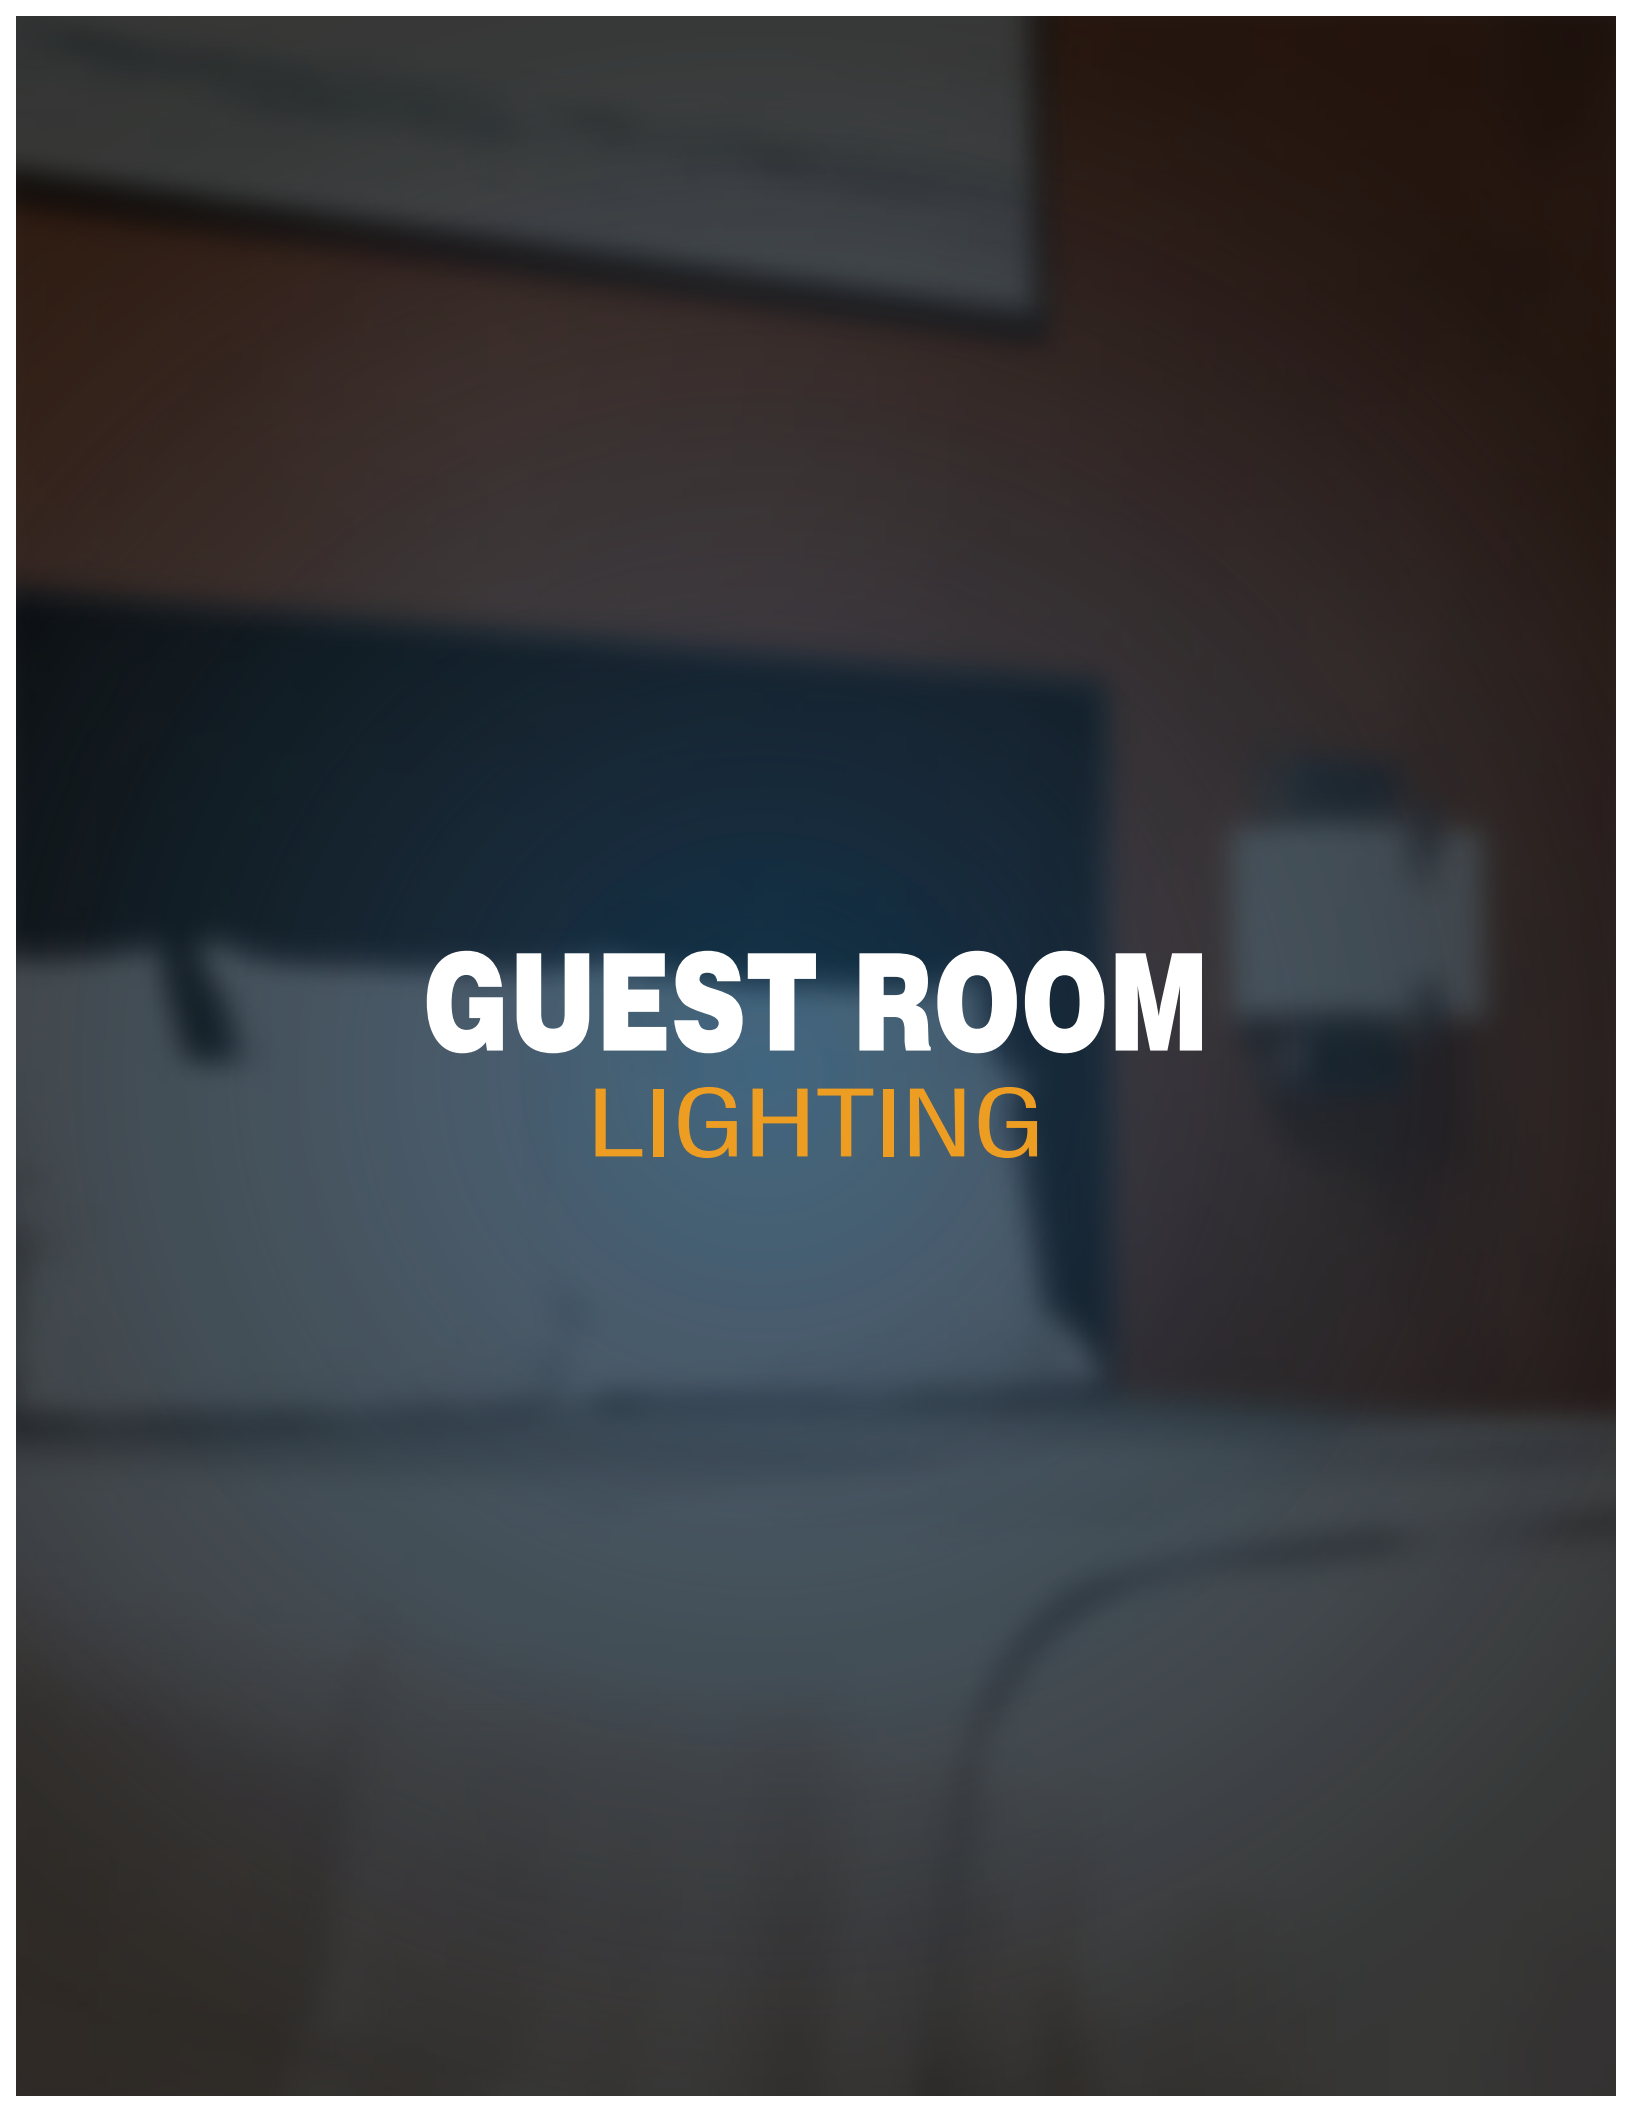

GUEST ROOM

LIGHTING

LED CUBE WALL LIGHT - SINGLE

SPECIFICATION

Family	:	HBCUBE
Input	:	120V - 277V AC at 50/60Hz
Dimming	:	No
Power	:	12W
Lumens	:	960LM
CCT	:	3000K ~ 6500K
CRI	:	80
Finish	:	White Acrylic with Brushed Nickel / White Acrylic with Matte Black
Options	:	N/A



LED CUBE WALL LIGHT - DOUBLE

SPECIFICATION

Family	:	HBCUBE
Input	:	120V - 277V AC at 50/60Hz
Dimming	:	No
Power	:	24W
Lumens	:	1920LM
CCT	:	3000K ~ 6500K
CRI	:	80
Finish	:	White Acrylic with Brushed Nickel / White Acrylic with Matte Black
Options	:	N/A



LED CUBE WALL LIGHT - DOUBLE XL

SPECIFICATION

Family	:	HBCUBE
Input	:	120V - 277V AC at 50/60Hz
Dimming	:	No
Power	:	24W
Lumens	:	1920LM
CCT	:	3000K ~ 6500K
CRI	:	80
Finish	:	White Acrylic with Brushed Nickel / White Acrylic with Matte Black
Options	:	N/A




RADIANCE COLLECTION



Single Headboard



Twin Headboard

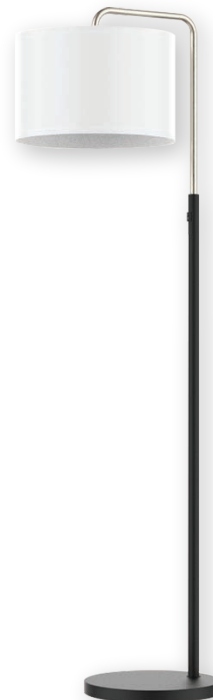

Floor Lamp



Single Table Lamp



Twin Table Lamp

GEM. COLLECTION



LED Headboard Light



LED Vanity Light - 2FT



LED Vanity Light - 3FT



Yellow Desk Lamp



Blue Desk Lamp

DIVINE COLLECTION



Single Headboard



Twin Headboard




Single Table Lamp



Twin Table Lamp



Desk Lamp

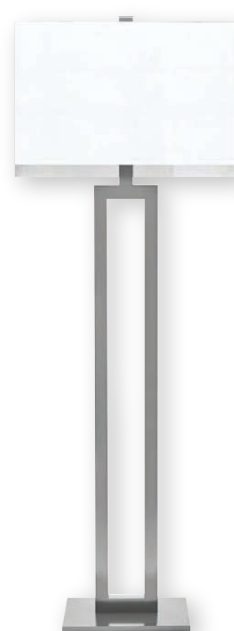

Floor Lamp

LA QUINTA COLLECTION



Single Headboard



Twin Headboard



Single Table Lamp



Twin Table Lamp



Desk Lamp



Floor Lamp

VERDE LUXE 2.0 COLLECTION




Single Table Lamp



Twin Table Lamp



Desk Lamp

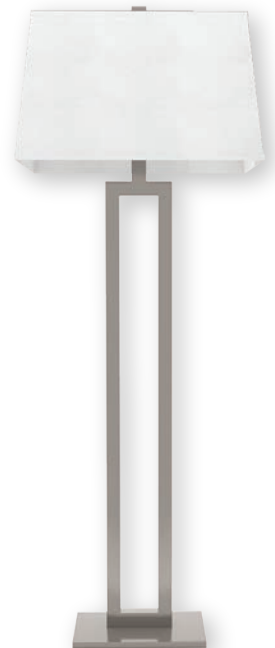

Floor Lamp

INNOVATE COLLECTION



Vanity Light



Ceiling Lamp



Single & Twin Headboard



Single Table Lamp



Twin Table Lamp



Desk Lamp



Floor Lamp

CASUAL COLLECTION



Single Headboard



Twin Headboard



Table Lamp



Desk Lamp



Floor Lamp

CONFIDENT COLLECTION



Vanity Light - 2.5FT



Vanity Light - 4.5FT



Single Headboard



Twin Headboard



Table Lamp



Floor Lamp

AZURE COLLECTION



Ceiling Light



Table Lamp



Floor Lamp



Single Headboard



Twin Headboard

TRIBECA COLLECTION



Wallscone



Headboard Light



Side Table Lamp



Table Lamp



Floor Lamp

RISE & SHINE COLLECTION



24" Ceiling Light



Matte Black Finish
Wall Lamp



Copper Pot Finish
Wall Lamp



Floor Lamp



Headboard with
Reading light








Wall Sconce



Table Lamp

RFID KEY CARDS

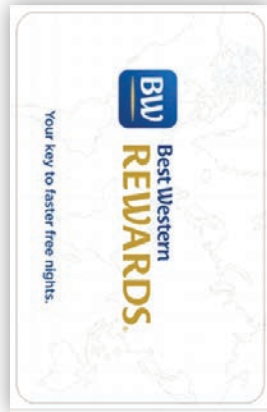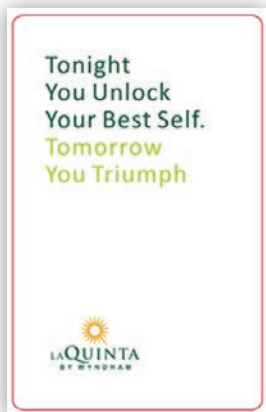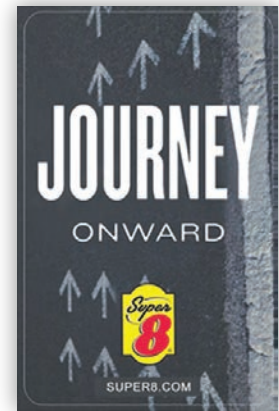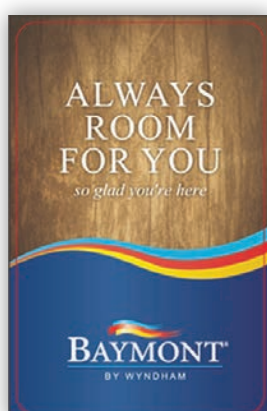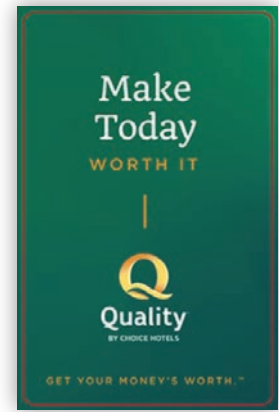


POLE & POLE MOUNTS

Square & Round Steel Poles & Mounts



SQUARE POLE



Wall Mount Bracket
1x Horizontal Tenon



L - Shape Wall Mount Bracket
Tenon: 1 x L shaped Tenon



Side Tenon Bracket
Tenon: 1 x Horizontal Tenon




4" / 5" Square Pole Bracket
Tenon: 1 x Vertical Tenon




4" / 5" Square Pole Bracket
Tenon: 1 x Horizontal Tenon



4" / 5" Square Pole Bracket
Tenon: 2 x Horizontal Tenon 180°



4" / 5" Square Pole Bracket
Tenon: 2 x Horizontal Tenon 90°



4" / 5" Square Pole Bracket
Tenon: 3 x Horizontal Tenon



4" / 5" Square Pole Bracket
Tenon: 4 x Horizontal Tenon



4" Square Pole Bracket
Tenon: 2 x Vertical Tenon 180°



4" Square Pole Bracket
Tenon: 4 x Vertical Tenon



1 Arm Wrap Around Bracket for
Wood Poles with 7-10 Inch Diameter



Tenon Bullhorn
Tenon: 2 x Vertical Tenon



Tenon Bullhorn
Tenon: 3 x Vertical Tenon



Tenon Bullhorn
Tenon: 4 x vertical tenon



ROUND POLE

ERGO CHAIR



FEATURES & SPECIFICATION

- High Back Ergo Chair with Arms (Also available without Arms)
- Fully adjustable, Completely supportive and super comfortable
- Pneumatic Adjustable Seat Height, Armrest, Backrest, and Seat Tilt
- Smooth recline with different lockable positions
- Flexible lumbar support for any seated position
- Polishing Electroplating Metal Frame (Polished Chrome Finish) and Metal Arm with Synthetic Leather
- 5-Vane Polished Aluminum Base with Twin Wheel Casters
- Fully supportive up to 330lbs
- 100% earth-friendly materials

METAL BED FRAME

FEATURES & SPECIFICATION

- Cold Rolled Carbon Steel Product
- All 4 Sides Bed Base Cover
- Premium Platform Based 17 Inch-High Metal Bed Frame
- Corrosion Resistant Rust-Free Powder Coating
- Lighter than a Wooden Bed Frame
- Bugs, Water and Fireproof
- 12 Minutes assembly time
- High Quality zero Maintenance

SIZES AVAILABLE :

King Size - 76" x 80"

Queen Size - 60" x 80"

Full Size - 54" x 80"



NOTES





Contact Us:



www.highlineled.com



432.247.8000



usasales@highlineled.com

