



HIGHLINE LED



LED LIGHTING
CATALOG

2021

Hospitality | Commercial | Industrial



www.highlineled.com



Led Lighting Solutions for Hotel / Motel & Commercials

About US

Highline Led is one of the fastest growing LED luminaries suppliers in the USA. Highline Led lighting offers both indoor and outdoor luminaries that pass rigorous testing procedures established by UL®, DLC® & Energy Star®. All of our products are listed in the Department of Energy's Lighting Facts program. We stand behind our products offering robust warranties.



We are using best in class raw materials and performs rigorous testing before shipping. Our most of product comes with 50,000 hours life time.



Required your products urgently? We also do same day dispatch and overnight shipping for urgent orders.



Our most of the product are UL / DLC or ETL certified so they comes with 5-Year complete hassle free warranty.

www.highlineled.com

Visit our website for new arrival products, technical specifications and spec sheets and more information of our products.

INDEX



OUTDOOR LIGHTING

05



VANITY LIGHTING

18



FLUSH MOUNT CEILING LIGHTS

24



LED WALL SCONCE

31



WAREHOUSE LIGHTING COLLECTION

43


12

..... RECESSED LIGHTING



22

..... LED MIRROR



29

..... LED BULB



35

..... GUEST ROOM COLLECTION



OUTDOOR LIGHTING



Led Flood Light



Ordering Guide

Example Order No. : FL2100-50-65-80-130

Model	Power	CCT	CRI	Lumens
FL2100	50 = 50W	65 = 6500K	80 = CRI 80	130 = 130lm/watt
	100 = 100W			
	150 = 150W			
	200 = 200W			

Input Voltage: 120~277V 50/60Hz



Led Shoe Box Light

BRIO



Ordering Guide

Example Order No. : SBBRIO-100-65-80-130

Model	Power	CCT	CRI	Lumens
SBBRIO	100 = 100W	65 = 6500K	80 = CRI 80	130 = 130lm/watt
	150 = 150W	40 = 4000K	90 = CRI 90	
	200 = 200W			
	250 = 250W			
	300 = 300W			

Input Voltage: 120~277V 50/60Hz



Adjustable Slip Fitter



Straight Arm to Straight Pole



Straight Arm to Round Pole



Led Canopy Light



CPGEN1

CPGEN2

Ordering Guide

Example Order No. : CPGEN2-100-65-80-130

Model	Power	CCT	CRI	Lumens
CPGEN1	45 = 45W	65 = 6500K	80 = CRI 80	130 = 130lm/watt
	60 = 60W			
CPGEN2	100 = 100W			
	120 = 120W			

Input Voltage: 120~277V 50/60Hz



Led Wall Pack



Ordering Guide

Example Order No. : WPGEN1-60-65-80-130

Model	Power	CCT	CRI	Lumens
WPMINI	18 = 18W	65 = 6500K	80 = CRI 80	130 = 130lm/watt
	25 = 25W			
WPGEN1	45 = 45W			
	60 = 60W			
	80 = 80W			
	100 = 100W			
	135 = 135W			
	150 = 150W			

Input Voltage: 120~277V 50/60Hz



Full Cut-Off Adjustable Wall Pack



Ordering Guide

Example Order No. : WPADJ-60-65-80-130

Model	Power	CCT	CRI	Lumens
WPADJ	25 = 25W	65 = 6500K	80 = CRI 80	130 = 130lm/watt
	45 = 45W			
	60 = 60W			
	80 = 80W			

Input Voltage: 120~277V 50/60Hz



Full Cut-Off Wall Pack



Ordering Guide

Example Order No. : WPFCUT-60-65-80-130

Model	Power	CCT	CRI	Lumens
WPFCUT	60 = 60W	65 = 6500K	80 = CRI 80	130 = 130lm/watt
	80 = 80W			
	100 = 100W			

Input Voltage: 120~277V 50/60Hz



Outdoor Up & Down Light



(Double Side Light)



(Single Side Light)

Model	Power	Light Color
UPDNDH (Double Side Light)	24 = 12W x 2	R = Red
	36 = 18W x 2	G = Green
	48 = 24W x 2	B = Blue
	72 = 36W x 2	V = Violet
UPDNSH (Single Side Light)	12 = 12W x 1	Y = Yellow
	18 = 18W x 1	P = Pink
	24 = 24W x 1	W = White
	36 = 36W x 1	RGB = RGB
IP65 Rated for Outdoor		Input Voltage: 120~277V 50/60Hz



Neon Light



Model	Power	CCT	CRI	Lumens
NEON-5050	5W Per Meter	R = Red G = Green B = Blue	80 = CRI 80	100 = 100 lm/watt
	9W Per Meter	RGB		
IP65 Rated for Outdoor			Input Voltage: 120V, 60Hz	



Accessories



Additional Power Supply
Can Support 50 Meter Max
HL-NL-5050-PS-50



Additional Power Supply
Can Support 100 Meter Max
HL-NL-5050-PS-100



Neon Installation Clips
Min. 3 pcs per foot
HL-NL-5050-S-CLIP



Neon Installation Channel
1 Meter In length
HL-NL-5050-CHANNEL



Power Pin
HL-NL-5050-PIN



Neon End Cap
HL-NL-5050-CAP



Neon Light Bending Connector
HL-NL-5050-BEND

Led Bollard



Ordering Guide

Example Order No. : BL2300-FT-20-65-80-100

Model	Power	CCT	CRI	Lumens
BL2300-RT (Round Top)	20 = 20W	65 = 6500K 40 = 4000K	80 = CRI 80	100 = 100lm/watt
BL2300-FT (Flat Top)	20 = 20W	30 = 3000K C= Custom		

IP65 Rated for Outdoor

Input Voltage: 120~277V 50/60Hz



IP65



Die Cast Aluminium

Symmetric Distribution

Anchor bolts included

Led Post Top

DECO



Model	Power	CCT	CRI	Lumens
PTDECO	100 = 100W	65 = 6500K 40 = 4000K	80 = CRI 80	100 = 100 lm/watt

Input Voltage: 120~277V 50/60Hz



IP65



Die Cast Aluminum

Symmetric Distribution

Led Wall Washer



Model	Power	CCT	CRI	Lumens
WWASH	36 = 36W	65 = 6500K B = Blue G = Green R = RGB	80 = CRI 80	100 = 100 lm/watt

IP65 Rated for Outdoor

Input Voltage: 120~277V 50/60Hz



IP65



Pole & Pole Mounts

Square & Round Steel Poles & Mounts



SQUARE POLE



Wall Mount Bracket
Tenon: 1 x Horizontal Tenon



L-Shape Wall Mount Bracket
Tenon: 1 x L shaped Tenon



Side Tenon Bracket
Tenon: 1 x Horizontal Tenon



4" Square Pole Bracket
Tenon: 1 x Vertical Tenon



4" Square Pole Bracket
Tenon: 1 x Horizontal Tenon



4" Square Pole Bracket
Tenon: 2 x Horizontal Tenon 180°



4" Square Pole Bracket
Tenon: 2 x Horizontal Tenon 90°



4" Square Pole Bracket
Tenon: 3 x Horizontal Tenon



4" Square Pole Bracket
Tenon: 4 x Horizontal Tenon



4" Square Pole Bracket
Tenon: 2 x Vertical Tenon 180°



4" Square Pole Bracket
Tenon: 4 x Vertical Tenon



Tenon Bullhorn
Tenon: 2 x Vertical Tenon



Tenon Bullhorn
Tenon: 3 x Vertical Tenon



Tenon Bullhorn
Tenon: 4 x vertical tenon



ROUND POLE

In Ground Light



Ordering Guide

Example Order No. : IG2600-24-65-80-130

Model	Power	CCT	CRI	Lumens
IG2600	24 = 24W	65 = 6500K	80 = CRI 80	130 = 130lm/watt
		30 = 3000K*	90 = CRI 90	
		35 = 3500K*		
		40 = 4000K*		
		R = RED*		
		G = GREEN*		
		B = BLUE*		
		RGB = RGB*		

IP65 Rated for Outdoor

Input Voltage: 120~277V 50/60Hz



IP65



Die Cast Aluminium

CREE LED CHIP

5 Degree Narrow Lens

Led Step Light - G1



Model	Power	CCT	CRI	Lumens
STEPG1	13 = 13W	65 = 6500K	80 = CRI 80	100 = 100 lm/watt
		30 = 3000K*		
		35 = 3500K*		
		40 = 4000K*		

IP65 Rated for Outdoor

Input Voltage: 120~277V 50/60Hz



IP65



LED RECESSED LIGHTING



6" Retrofit Down Light



Model No	Power	CCT	Lumens	Shape	Product Size	Cut Size
DL1100	22W	6500K	110lm/Watt	Round	6.5"	6"



LED Recessed Panel Light



Ordering Guide

Example Order No. : PL2X4-50-65-80

Model	Power	Cut Size	Cut Size	CCT	CRI
PL1600 (Panel Light)	6 = 6W	4"	6"	65 = 6500K	80 = CRI 80
	15 = 15W	7"	9"	35 = 3500K*	90 = CRI 90*
	18 = 18W	8"	10"	30 = 3000K*	
PL2X2 (Panel Light 2x2)	40 = 40W	NA	NA	40 = 4000K*	
	48 = 48W	NA	NA		
PL2X4 (Panel Light 2x4)	50 = 50W	NA	NA		
	72 = 72W	NA	NA		
PL1X4 (Panel Light 1x4)	36 = 36W	NA	NA		

Input Voltage: 120~277V 50/60Hz



Items with * mark are non-stock item, call factory for availability

IP65 Down Light

DLIP65

IP65 Down Light - DLIP65

Example Order No. : DLIP65-6-28-65-80-80



Model	Power	CCT	CRI	Lumens
DLIP65-4 (4" Model)	13 = 13W	65 = 6500K	80 = CRI 80	80 = 80 lm/watt
		30 = 3000K*	90 = CRI 90*	
DLIP65-6 (6" Retrofit)	28 = 28W	35 = 3500K*		
		40 = 4000K*		

Input Voltage: 120~277V 50/60Hz



6" LED Disk Light

DISK06

Flush Mount LED Disk Light - DISK06

Example Order No. : DISK06-15-65-80-80



Model	Power	CCT	CRI	Lumens
DISK06 (6" Model)	15 = 15W	65 = 6500K	80 = CRI 80	80 = 80 lm/watt
		30 = 3000K*	90 = CRI 90*	
		40 = 4000K*		
		50 = 5000K*		
		65 = 6500K*		
		MCCT = 40K, 50K, 65K (Multiple Selectable CCT*)		

Input Voltage: 120~277V 50/60Hz



Emergency Led Driver

Emergency Led Driver For Panels, Troffers and Down Lights



- Listed for field installation UL924 and CSA C22.2 NO.141
- Output Current and Voltages: 320-600mA, 25V-48V
- Selectable Emergency Power: 8W, 10W, 15W
- Constant Output Power (Auto-Sensing Output Within Each Range)
- RoHS Compliant, UL Listed for field installation
- High-Temperature, Maintenance - Free, Ni-MH battery, Ta:50°

Center Basket Troffer

CBT2X2, CBT2X4



Center Basket Troffer - CBIT

Example Order No. : CBT2X2-36-65-80-120

Model	Power	CCT	CRI	Lumens
CBT2X2 (Size: 2'x2')	36 = 36W	65 = 6500K	80 = CRI 80	120 = 120 lm/watt
		30 = 3000K*	90 = CRI 90*	
CBT2X4 (Size: 2'x4')	50 = 50W	40 = 4000K*		
		50 = 5000K*		

Input Voltage: 120~277V 50/60Hz



3" Pinhole Down Light

DL1303

3" Down Light - DL1303

Example Order No. : DL1303-10-65-80-80



Model	Power	CCT	CRI	Lumens
DL1303 (3" Model)	10 = 10W	30 = 3000K	80 = CRI 80	80 = 80 lm/watt
		40 = 4000K*	90 = CRI 90*	
		50 = 5000K*		
		65 = 6500K*		

Input Voltage: 120~277V 50/60Hz



New Construction Down Light

4" New Construction Down Light - DLARG2-4

DLARG2-4

Example Order No. : DLARG2-4-D-1100-30K-C-SFW-WH-CR

Model	Input	Dimmable	Lumen Output	CCT	Options
DLARG2-4	120 = 120V	N = Non-Dimmable	1100 = 1100 lumen	30K = 3000K	EM = Emergency Backup
	277 = 277V	D = Dimmable	1600 = 1600 lumen	35K = 3500K	C = C-Chanel Bar Hanger
	U = 120-277V		2000 = 2000 lumen	40K = 4000K	F = Flat Bar Hanger
				50K = 5000K	H = Wood Joist Bar Hanger
				65K = 6500K	



Trim	Reflector Finish	Lens Type
SF = Self Flanged	C = Clear	CR = Clear Tempered
SFW = Self Flanged White	WH = White	SB = Sand Blasted
NF = No Flange	HZ = Haze	



New Construction Down Light

6" New Construction Down Light - DLARG2-6

DLARG2-6

Example Order No. : DLARG2-6-D-2500-35K-C-SFW-WH-CR

Model	Input	Dimmable	Lumen Output	CCT	Options
DLARG2-6	120 = 120V	N = Non-Dimmable	2500 = 2500 lumen	30K = 3000K	EM = Emergency Backup
	277 = 277V	D = Dimmable	3000 = 3000 lumen	35K = 3500K	C = C-Chanel Bar Hanger
	U = 120-277V		3500 = 3500 lumen	40K = 4000K	F = Flat Bar Hanger
				50K = 5000K	H = Wood Joist Bar Hanger
				65K = 6500K	



Trim	Reflector Finish	Lens Type
SF = Self Flanged	C = Clear	CR = Clear Tempered
SFW = Self Flanged White	HZ = Haze	SB = Sand Blasted
NF = No Flange	WH = White	



4" & 6" NC IC Rated Can

4" & 6" New Construction IC Rated CAN

NCHSG-4 & NCHSG-6



4" New Construction IC Rated CAN

Model No: NCHSG-4



6" New Construction IC Rated CAN

Model No: NCHSG-6

Trim and LED module sold separately

Quick Connect wiring connectors included in junction

Die-formed housing and plaster frame



LED Retrofit Downlight

4" & 6" Retrofit Down-Light

RDL004 & RDL006



4" Retrofit Down-light

Model No: RDL004



6" Retrofit Down-light

Model No: RDL006



Model	Power	CCT	CRI	Lumens
RDL004 (4" Retrofit)	12 = 12W	65 = 6500K 30 = 3000K* 35 = 3500K*	80 = CRI 80 90 = CRI 90*	80 = 80 lm/watt
RDL006 (6" Retrofit)	15 = 15W	40 = 4000K* 50 = 5000K*		

Input Voltage: 120~277V 50/60Hz



Items with * mark are non-stock item, call factory for availability

VANITY LIGHTING



VANITY LIGHT

➤ 3FT: VL9002-ND-120-3



➤ 4FT: VL9003-ND-120-4

Specifications

- Length: 3FT & 4FT
- Light Source: 2 x T8 [*T8 Not Included]
(Use Standard Type-B, Ballast Bypass, Double Ended Powered T8 Tubes)
- Material: Acrylic + Iron
- Diffuser: Diffused Acrylic

Size Available: 3FT & 4FT

➤ 3FT: VL1004-ND-120-3



➤ 4FT: VL1004-ND-120-4

Specifications

- Length: 3FT & 4FT
- Light Source: 2 x T8 [*T8 Not Included]
(Use Standard Type-B, Ballast Bypass, Double Ended Powered T8 Tubes)
- Material: Acrylic + Iron
- Diffuser: Diffused Acrylic

Size Available: 3FT & 4FT

➤ 2FT: VL9003-ND-120-2-65-80



Specifications

- Length: 2FT
- Input: 120V / 60Hz
- Light Source: 26W LED
- Material: Acrylic + Iron
- Diffuser: Diffused Acrylic

Size Available: 2FT

➤ 2FT: VLECO-ND-120-2-65-80-WH



➤ 3FT: VLECO-ND-120-3-65-80-WH

Specifications

- Length: 2FT & 3FT
- Input: 120V / 60Hz
- Light Source: LED
- Power: 2FT-12W, 3FT- 18W
- Diffuser: Diffused Acrylic

Size Available: 2FT & 3FT

VANITY LIGHT

➤ 2FT: VL9004-ND-120-2-65-80

Size Available: 2FT



Specifications

- Length: 2FT
- Input: 120V / 60Hz
- Light Source: 26W LED
- Material: Acrylic + Iron
- Diffuser: Diffused Acrylic



➤ 3FT: VL9005-ND-120-3

➤ 4FT: VL9005-ND-120-4

Size Available: 3FT & 4FT



Specifications

- Length: 3FT & 4FT
- Light Source: 2 x T8 [*T8 Not Included]
(Use Standard Type-B, Ballast Bypass, Double Ended Powered T8 Tubes)
- Material: Acrylic + Iron
- Diffuser: Diffused Acrylic



➤ 2FT: VL9004-ND-120-2-65-80

Size Available: 2FT



Specifications

- Length: 2FT
- Input: 120V / 60Hz
- Light Source: 26W LED
- Material: Acrylic + Iron
- Diffuser: Diffused Acrylic



LED Exhaust Fan

LED Exhaust Fan - "FLOW"



Ordering Guide: EFFLOW-12-30-8X8-65

Model	Light Power	Fan Power	Cut Size	CCT	Noise
EFFLOW	12 = 12W	30 = 30W	8" x 8"	65 = 6500K	< 48 dBm

Input Voltage: 120~277V 50/60Hz

8" X 8" Installation Size



LED Exhaust Fan - "STREAM"



Ordering Guide: EFSTRM-15-30-10X10-65

Model	Light Power	Fan Power	Cut Size	CCT	Noise
EFSTRM	15 = 15W	30 = 30W	10" x 10"	65 = 6500K	< 48 dBm

Input Voltage: 120~277V 50/60Hz


10" X 10" Installation Size



HIGHLINE LED-LED MIRROR



LED Mirror

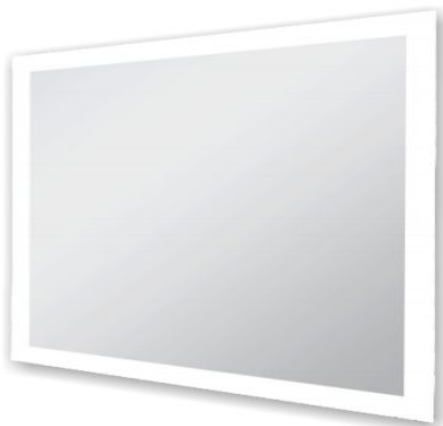

Perimeter LED Patten



Insert LED Patten



Features

5 mm Copper Free Silvered Mirror

In-Built High Lumen Output 2835 LEDs

Built - In De-fogger for Fog Removal

Ordering Guide

Input Voltage: 120~277V 50/60Hz

Model	Width	Height	Options	Light Patten	Color Temp.
HL-VM	36 = 36 Inch	36 = 36 Inch	Defogger	P = Perimeter	65 = 6500K
	48 = 48 Inch	48 = 48 Inch		I = Insert*	45 = 4500K*
					30 = 3000K*

Items with * mark are non-stock item, call factory for availability

We also do customized order based on customer requirement.



Flush Mount Ceiling Light

LED Surface Light



SFPL



Anodized Silver Border

SFAPL

Model	Power	CCT	CRI	Lumens
SFPL	12 = 12W	65 = 6500K	80 = CRI 80	100 = 100lm/watt
	18 = 18W			
	22 = 22W			
	24 = 24W			
	30 = 30W			
SFAPL	15 = 15W	65 = 6500K	80 = CRI 80	100 = 100lm/watt
	22 = 22W			
	30 = 30W			

Input Voltage: 120~277V 50/60Hz



Magnetic Retrofit Kit

Convert Fluorescent Fixtures into LED Type With Magnetic Retrofit Kit



Model	Power	CCT	CRI	Lumens
MTRK-RD	14 = 14W	65 = 6500K	80 = CRI 80	80 = 80lm/watt
MTRK-SQ	13.5 = 13.5W			

Input Voltage: 120V AC 50/60Hz



Flush Mount Ceiling Light

Double Ring



Model	Power	Diameter	CCT	CRI	Lumens
FMDBLR-12	20W LED	12"	65 = 6500K 30 = 3000K*	80 = CRI 80 90 = CRI 90*	80 = 80 lm/watt
FMDBLR-14	24W LED	14"	35 = 3500K* 40 = 4000K*		

Input Voltage: 120~277V 50/60Hz



Wonder



Model	Power	Diameter	CCT	CRI	Lumens
FMDVNE	24W LED	12"	65 = 6500K 30 = 3000K* 35 = 3500K* 40 = 4000K*	80 = CRI 80 90 = CRI 90*	80 = 80 lm/watt

Input Voltage: 120~277V 50/60Hz



Formula-Blue

Model: FMFB-12



Specifications

- › Diameter: 12"
- › Light Source: 2 x E26 bulb (Bulb(s) not included)
(Use 12W LED max for each)
- › Material: Acrylic + Iron
- › Diffuser: Diffused Acrylic

Input Voltage: 120~277V 50/60Hz



Flush Mount Ceiling Light

2001



Model	Power	Diameter	CCT	CRI	Lumens
FM2001	24W LED	14"	65 = 6500K	80 = CRI 80	80 = 80 lm/watt
			30 = 3000K*	90 = CRI 90*	
			35 = 3500K*		
			40 = 4000K*		

Input Voltage: 120V 50/60Hz



2002



Model: FM2002-12

Specifications

- Diameter: 12"
- Light Source: 2 x E26 bulb (Bulb(s) not included)
(Use 12W LED max for each)
- Material: Acrylic + Iron
- Diffuser: Diffused Acrylic

Input Voltage: 120~277V 50/60Hz



Under Cabinet Light



Model	Power	CCT	CRI	Lumens
UC1400-9"	5 = 5W	65 = 6500K	80 = CRI 80	130 = 130lm/watt
UC1400-12"	6 = 6W	30 = 3000K*	90 = CRI 90	
UC1400-18"	9 = 9W	35 = 3500K*		
UC1400-24"	11 = 11W	40 = 4000K*		

Input Voltage: 120, 60Hz



Wrap Light - RDS Model



Ordering Guide

Example Order No. : WRPRDS-65-80-120

Model	Power	CCT	CRI	Lumens
WRPRDS (2' Model)	20 = 20W	65 = 6500K 30 = 3000K*	80 = CRI 80	120 = 120lm/watt
WRPRDS (4' Model)	32 = 32W	35 = 3500K* 40 = 4000K* MCCT = Multiple CCT		

Input Voltage: 120~277V 50/60Hz



Wrap Light - LWP Model



Model	Power	CCT	CRI	Lumens
WRPLWP (2' Model)	23 = 23W	65 = 6500K 30 = 3000K*	80 = CRI 80	120 = 120 lm/watt
WRPLWP (4' Model)	46 = 46W	35 = 3500K* 40 = 4000K* MCCT = Multiple CCT		

Input Voltage: 120~277V 50/60Hz



Factory Installed Battery Backup Available on Request

Wrap Light - HAL Model



Model	Power	CCT	CRI	Lumens
WRPHAL (2' Model)	20 = 20W	65 = 6500K 30 = 3000K*	80 = CRI 80	120 = 120 lm/watt
WRPHAL (4' Model)	40 = 40W	35 = 3500K* 40 = 4000K*		

Input Voltage: 120~277V 50/60Hz



Brighter lights for brighter homes.

HIGHLINE LED - Led Bulbs



LED Light Bulb

A19 LED Bulb E26 Base



Example Order No. : HL-LB-E26-12W-65-80-80

Model	Power	CCT	CRI	Lumens
HL-LB-A19-E26	9W	65 = 6500K	80 = CRI 80	80 = 80 lm/watt
	12W	40 = 4000K*	90 = CRI 90*	
	15W			

Input Voltage: 120~277V 50/60Hz



A19 LED Bulb GU24 Base



Example Order No. : HL-A19-LB-GU24-9W-65-80-80

Model	Power	CCT	CRI	Lumens
HL-LB-A19-GU24	9W	65 = 6500K	80 = CRI 80	80 = 80 lm/watt
	12W*	30 = 3000K	90 = CRI 90	
	15W*			

Input Voltage: 120~277V 50/60Hz



G24 Led Bulb




Example Order No. : HL-LB-A19-G24-2-9-65-80

Model	Pin	Power	CCT	Lumens
HL-LB-A19-G24	2 = 2 Pin	9 = 9W	65 = 6500K	80 = 80 lm/watt
	4 = 4 Pin	12 = 12W	40 = 4000K*	
			30 = 3000K*	

Input Voltage: 120~277V 50/60Hz



Items with * mark are non-stock item, call factory for availability

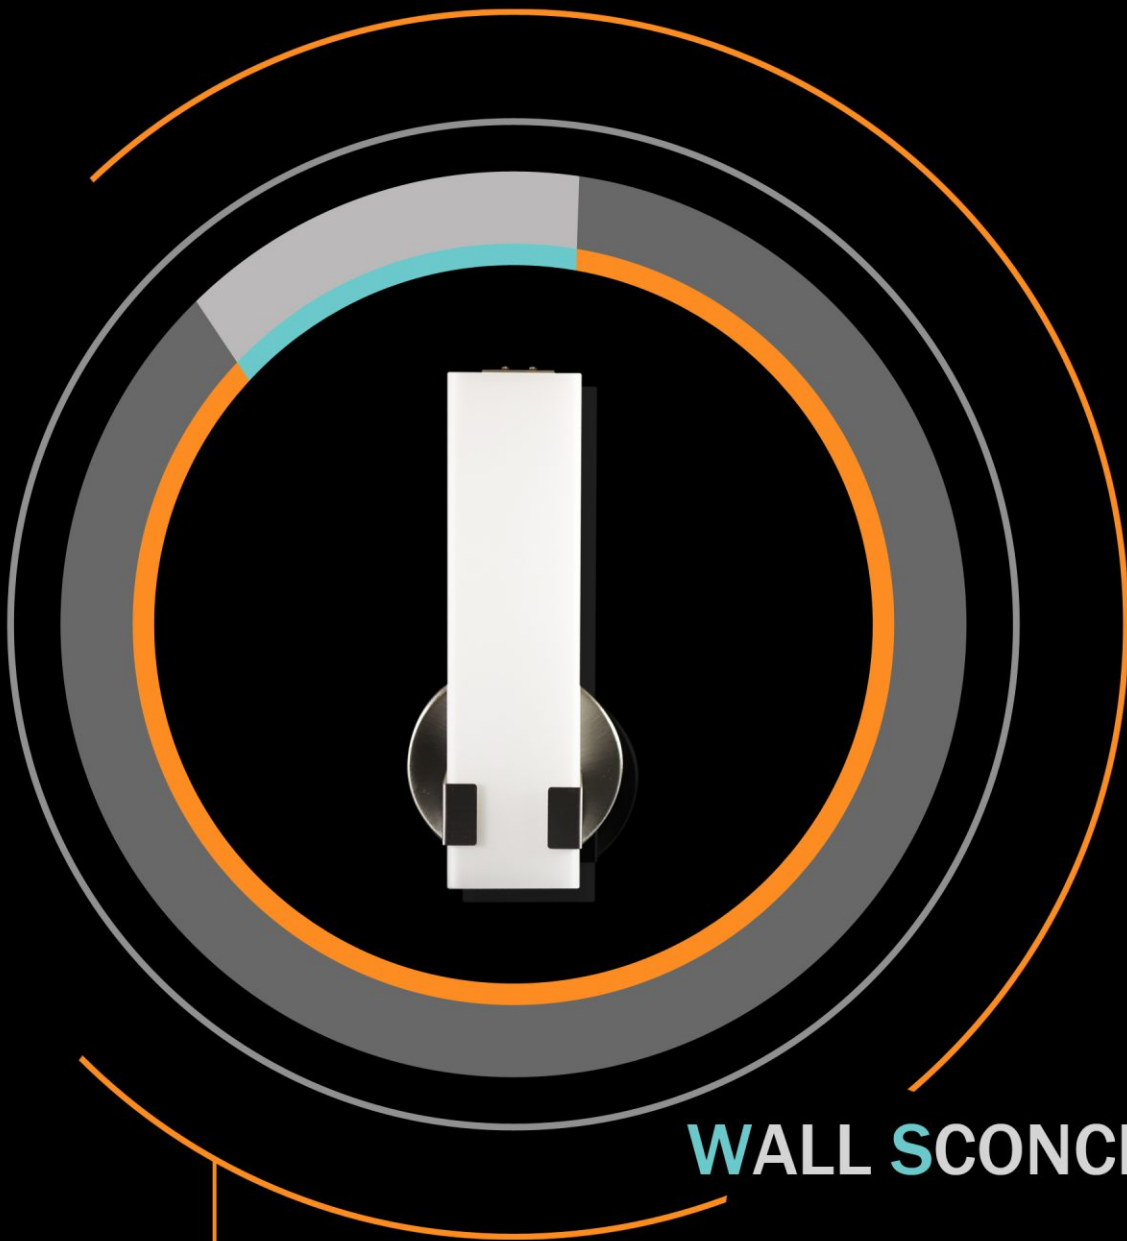

WALL SCONCE LIGHTING

LED Wall Sconce



➤ **Model: WS1001-120-16-65-90** **Dimension: W7"*H16"*E4"**

Specifications

- Input: 120V A.C. 50/60Hz
- Power: 16W LED
- CCT: 6500K
- Material: Diffused Acrylic + Iron Bronze Powder Coated



➤ **Model: WS1002-120-16-65-90**

Dimension: W7"*H16"*E4"

Specifications

- Input: 120V A.C. 50/60Hz
- Power: 16W LED
- CCT: 6500K
- Material: Diffused Acrylic + Steel



➤ **Model: WS1003-120-16-65-90** **Dimension: W4-3/4"*H11-1/2"*E4"**

Specifications

- Input: 120V A.C. 50/60Hz
- Power: 16W LED
- CCT: 6500K
- Material: Diffused Glass + Steel



➤ **Model: WS1004-120-16-65-90**

Dimension: W6"*H12"*E4"

Specifications

- Input: 120V A.C. 50/60Hz
- Power: 16W LED
- CCT: 6500K
- Material: Diffused Acrylic + Iron Bronze Powder Coated



Corridor Sconce - Shine



➤ **Model: CLSHIN-120-16-65-90**

Dimension: W10"*H4"*E4"

Specifications

- Input: 120V~277V A.C. 50/60Hz
- Power: 16W LED
- CCT: 6500K
- Material: Iron + Acrylic



Corridor Light - Baymont



Ordering Guide: CLBYMT-10-65-80-80

Model	Power	CCT	CRI	Lumens
CLBYMT	10 = 10W	65 = 6500K	80 = CRI 80	80 = 80 lm/watt
	15 = 15W			

Input Voltage: 120~277V 50/60Hz



Golden Wall Sconce



➤ **Model: CLGLDN-120-12-65-90**

Specifications

- Input: 120V~277V A.C. 50/60Hz
- Power: 12W LED
- CCT: 6500K
- Material: Iron + Acrylic
- Color: Golden + Black



Emergency Light

> Model: EM2200



Specifications

- > Input: 120V~277V AC 50/60 Hz
- > Battery Backup: 90 Mins. (Max 24 Hrs for full recharge time)
- > Built in 3.6V 1000mAh Ni-Cd battery for emergency backup
- > UL Listed for indoor damp location
- > Test Switch and charge indicator



Exit Light



Model	No. of Face	Light Color	Emergency Backup
EXEDGE-SF	Single Face	Red	90 Mins
EXEDGE-DF	Double Face		

Input Voltage: 120~277V 50/60Hz

- > Universal mount for wall /ceiling installation
- > Test switch and charge indicator



Outdoor Emergency Light

> Model: EMOVAL



Specifications

- > Input: 120V~277V A.C. 50/60 Hz
- > Battery Backup: 90 Mins. (Max 24 Hrs for full recharge time)
- > Built in 3.6V 1000mAh Ni-Cd battery for emergency backup
- > UL listed for outdoor wet location
- > Test switch and charge indicator



— Guest Room Lighting Collection



Truly Your Collection

Comparable to Truly Yours Collection Program



BPTYC-VL



BPTYC-SHB



BPTYC-DHB



BPTYC-TL



BPTYC-DL



BPTYC-FL



- Base Type E26
- 120V Convenience Outlet
- USB Charging Socket
- Rust Proof Metal Material
- On/Off Rocker Switch
- White Hardback Shade

Specially designed by Highline LED suitable for most of properties

Glint Collection




BPGLI-DL



BPGLI-STL



BPGLI-TTL



BPGLI-FL



- Base Type E26
- 120V Convenience Outlet
- USB Charging Socket
- Rust Proof Metal Material
- On/Off Rocker Switch
- White Hardback Shade

Azure Collection

Comparable to Holiday Inn Formula Blue Program



- Base Type E26
- 120V Connivance Outlet
- USB Charging Socket
- Rust Proof Metal Material
- On/Off Rocker Switch
- White Hardback Shade



Comparable to Super 8 Innovate Scheme

Innovate Collection



- Base Type E26
- 120V Connivance Outlet
- USB Charging Socket
- Rust Proof Metal Material
- On/Off Rocker Switch
- White Hardback Shade



Head Board Light - "CUBE"



Single

12W LED

- 1 x Convenience Outlet
- 1 x USB Charging Socket
- 1 x On / Off Switch



Double

24W LED

- 2 x Convenience Outlet
- 2 x USB Charging Socket
- 2 x On / Off Switch

➤ 1.5mm Thick Acrylic

➤ Suitable for Junction Box Mounting

➤ Suitable for Junction Box Mounting

➤ In-Built LED

Divine Collection



- Base Type E26
- 120V Convenience Outlet
- USB Charging Socket
- Rust Proof Metal Material
- On/Off Rocker Switch
- White Hardback Shade

Verdeluxe 2.0



- Base Type E26
- 120V Convenience Outlet
- USB Charging Socket
- Rust Proof Metal Material
- On/Off Rocker Switch
- White Hardback Shade



La Quinta Inn - Del Sol



- Base Type E26
- 120V Convenience Outlet
- USB Charging Socket
- Rust Proof Metal Material
- On/Off Rocker Switch
- White Hardback Shade



Gem. Lighting Collection

Headboard Light



Including 8' Long Cord
12W Integrated LED

- 1 x Rocket Switch At Base
- Frosted White Acrylic Shade



Desk Lamp



Including 8' Cong Cord
Base : E12

- 1 x Rocket Switch At Base
- 1 x USB 2.1A Fast Charger
- 1 x Convenience Outlet At Base

Vanity Light - 2ft | 3ft



2ft - 24W Integrated led



3ft - 36W Integrated led

- 2' & 3' Vanity Light With Steel Frame
- Frosted White Acrylic Shade

Casual Collection



Desk Lamp



- 1 x Rocker Switch At Base
- 1 x E26 Socket (Bulb Not Included)
- 1 x Convenience Outlet At Base

Single Table Lamp



- 1 x Rocker Switch At Base
- 1 x E26 Socket

Floor Lamp



- Switch: Push through Socket
- 1 x E26 Socket

Single Headboard Light



- 1 x Rocker Switch At Base
- 1 x E26 Socket

Double Headboard Light



- 2 x Rocker Switch At Base
- 2 x E26 Socket

Confident Collection



Desk Lamp



GU24 Base

2.5' Ft Vanity Light



20W Integrated led

Floor Lamp



1 x E26 Base

Single Headboard Light



1 x E26 Base

Twin Headboard Light



2 x E26 Base

- 1 x Rocker Switch At Base
- 1 x GU24 Socket (Bulbs Not Included)
- 1 x Convenience Outlet At Base

- 20W, 6500K Integrated LED
- Frosted White Acrylic Shade

- 1 x Rocker Switch On Stem
- 1 x E26 Sockets (Bulb Not Included)

- 1 x Rocker Switch At Base
- 1 x E26 Socket (Bulb Not Included)

- 2 x Rocker Switch At Base
- 2 x E26 Sockets (Bulb Not Included)

Radiance Collection

Comparable to Days Inn Dawn Theme



Single Table Lamp



Double Table Lamp



Floor Lamp



Single Headboard Light



Twin Headboard Light



- 1 x Rocker Switch At Base
- 1 x Convenience Outlet At Base
- 1 x USB Charging Socket
- 1 x E26 Socket

- 2 x Rocker Switch At Base
- 2 x Convenience Outlet At Base
- 1 x USB Charging Socket
- 2 x E26 Socket

- 1 x Rocker Switch At Base
- 1 x E26 Socket (Bulbs Not Including)

- 1 x Rocker Switch At Base
- 1 x Convenience Outlet At Base
- 1 x USB Charging Socket
- 1 x E26 Socket

- 2 x Rocker Switch At Base
- 2 x Convenience Outlet At Base
- 1 x USB Charging Socket
- 2 x E26 Socket

LED T8 Tubes

LED T8 Tubes, Type-B Ballast Bypass, Double Ended Powered

Ordering Guide

Example Order No. : T81700-2-12-65-80-120

Model	Length	Power	CCT	CRI	Lumens
T81700	2 = 2FT	10 = 10W	65 = 6500K	80 = CRI 80	120 = 120lm/watt
	3 = 3FT	12 = 12W	30 = 3000K*		
	4 = 4FT	18 = 18W	35 = 3500K*		
			40 = 4000K*		

Input Voltage: 120~277V 50/60Hz

NOTE: 2FT, 3FT & 4FT versions are available in G13 Base
Items with * mark are non-stock item, call factory for availability



LED T8 Tubes - 8FT

LED T8 Tubes, Type-B Ballast Bypass, Double Ended Powered

Ordering Guide

Example Order No. : T81700-8-40-65-80-120

Model	Length	Power	CCT	CRI	Lumens
T81700	8 = 8FT	40 = 40W	65 = 6500K	80 = CRI 80	120 = 120lm/watt

Input Voltage: 120~277V 50/60Hz

NOTE: 8FT version is available in FA8 Base



Sign LED Tubes

Led Sign Tube Light With Double Sided Light, Type B - Double Ended Powered

R17D Rotatable End Cap


Ordering Guide

Example Order No. : T8SIGN-6-38-65-80-120

Model	Length	Power	CCT	CRI	Lumens
T8SIGN	4 = 4FT	21 = 21W	65 = 6500K	80 = CRI 80	120 = 120lm/watt
	5 = 5FT	28 = 28W			
	6 = 6FT	38 = 38W			
	7 = 4FT	50 = 50W			
	8 = 8FT	51 = 51W			
	10 = 10FT	60 = 60W			

Input Voltage: 120~277V 50/60Hz



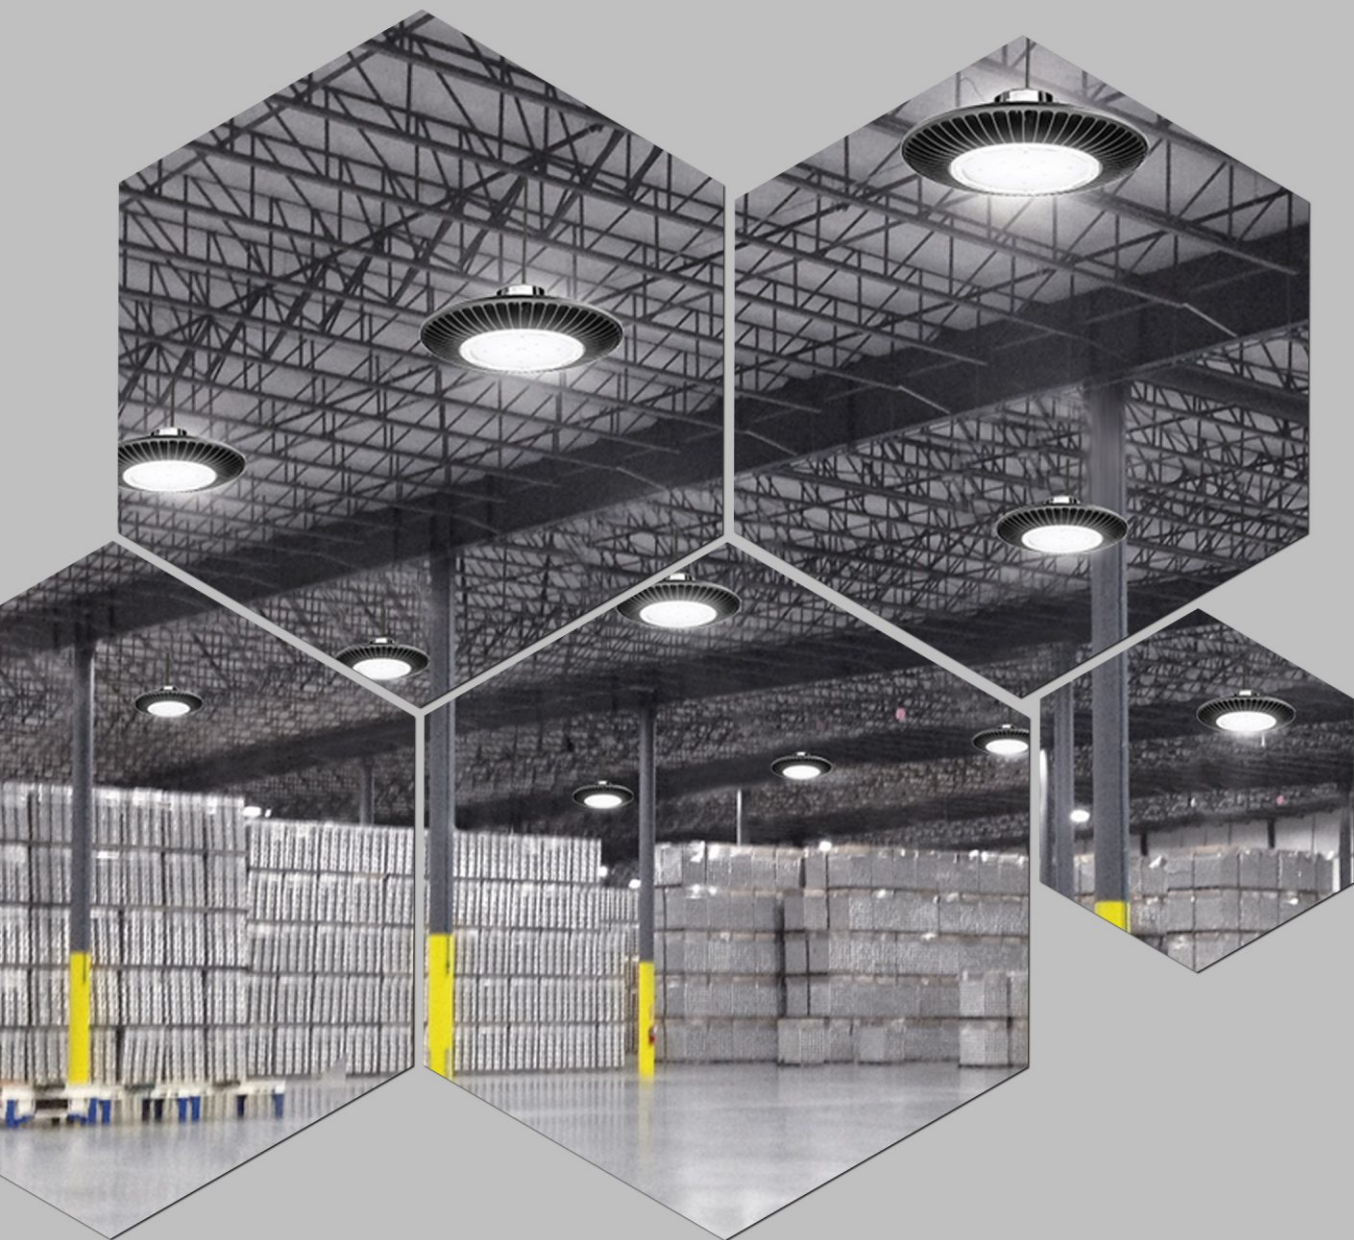

WAREHOUSE LIGHTING FIXTURE

Commercial Lighting

LED Linear Lighting - 4FT



Ordering Guide

Example Order No. : HBLINR-4-165-65-80-130

Model	Power	CCT	CRI	Lumens
HBLINR	165 = 165W	65 = 6500K	80 = CRI 80	130 = 130lm/watt
	325 = 325W	40 = 4000K*		



Input Voltage: 120~277V 50/60Hz

LED UFO Highbay



Ordering Guide

Example Order No. : HBUFO-100-65-80-130

Model	Power	CCT	CRI	Lumens
HBUFO	100 = 100W	65 = 6500K	80 = CRI 80	130 = 130lm/watt
	200 = 200W	40 = 4000K*		



Input Voltage: 120~277V 50/60Hz

LED Profiles / Linear Lights


Surface Mount



Recessed Mount



Suspension Mount

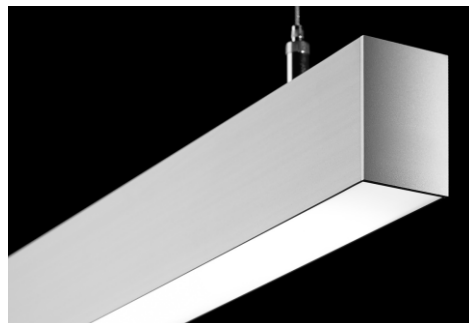


Profile Ordering Guide

Example Order No. : HL-PL-SFM-35-2

Type	Size	Length
HL-PL-RM (Recessed Mount)	25 = 25 x 15 MM	1 = 1 Meter
	35 = 35 x 35 MM	2 = 2 Meter
HL-PL-SFM (Surface Mount)	50 = 50 x 50 MM	C = Customised
HL-PL-SUSM (Suspension Mount)		

Led Profile Strip

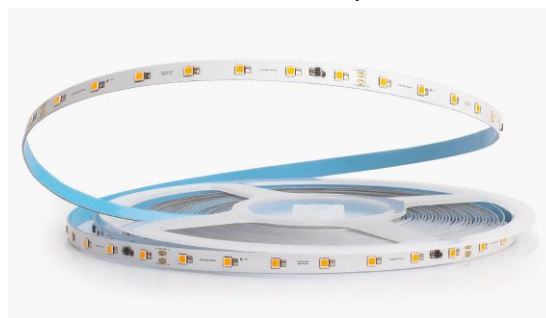

Led Strip Power Supply



Led Strip Ordering Guide

Example Order: 12-240-65

Type	Size	CCT
12 = 12V	120 = 120 led/meter	65 = 6500K
	240 = 240 led/meter	40 = 4000K
24 = 24V		30 = 3000K
		C = Any other CCT*

Call our sales rep for power supply selection

75W, 100W, 150W, 200W, 350W




We also do customized size and customized length and size based on project requirements

RFID Key Card

KABA, SECURE LOX, MIWA & SAFLOK RFID KEY CARDS

FRANCHISE: Wyndham, Quality Inn, Choice, Comfort, Baymont, Super 8, Best Western, ABVI, M6, LaQuinta, Days Inn

Generic Key Cards With Welcome Logo

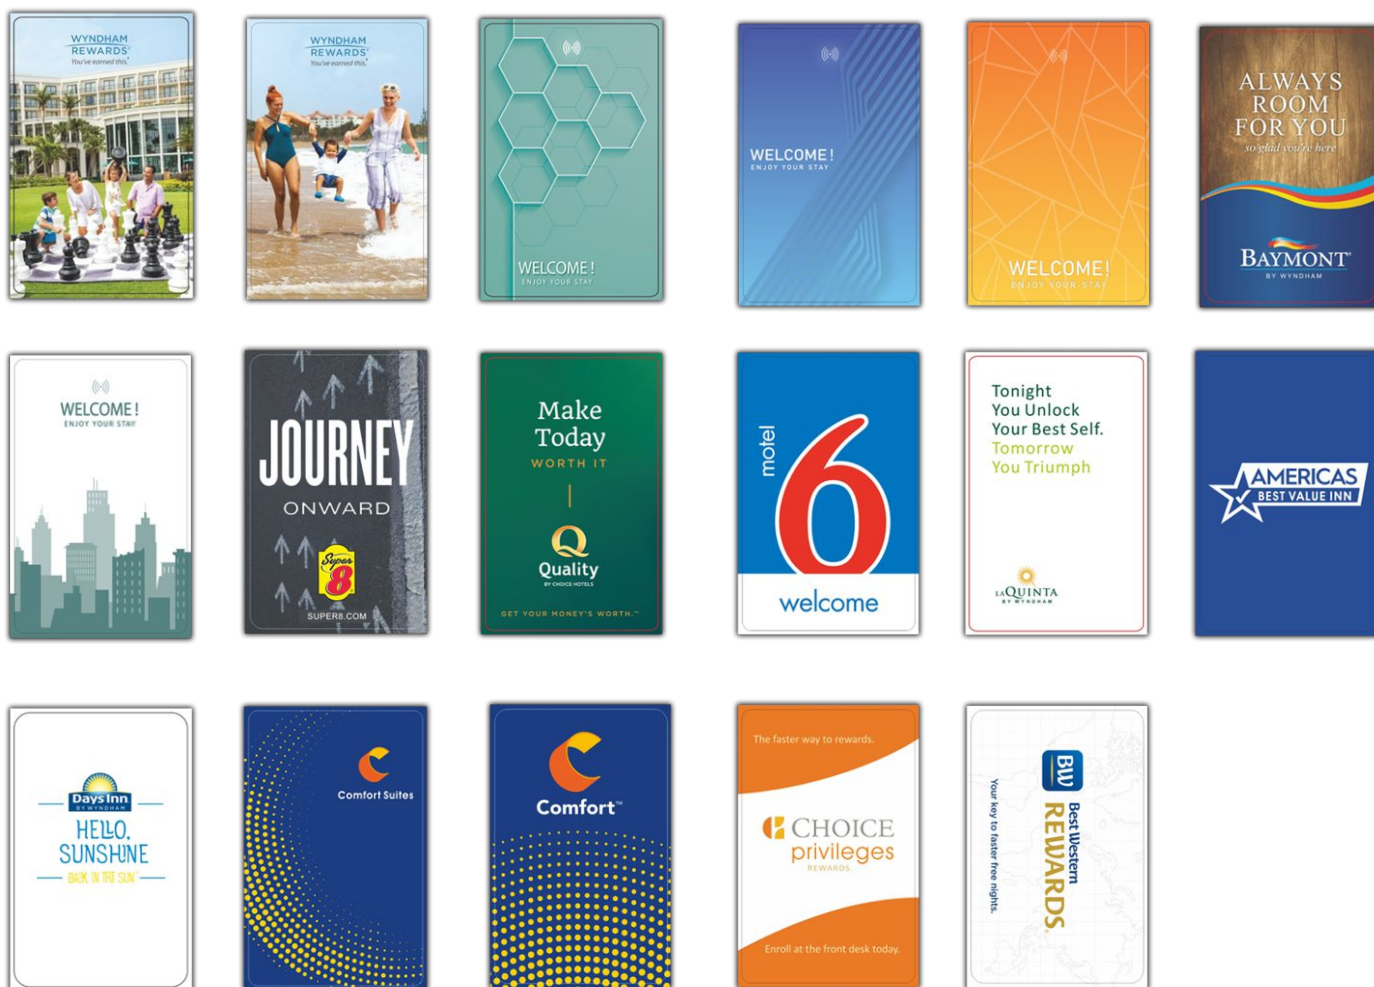



www.highlineled.com



1.432.247.8000

Showroom

HIGHLINE LED

2107 W Florida Ave,
Midland, TX, USA, 79701

Office

HIGHLINE LED

805 E Broadway St,
Andrews, TX, USA, 79714