



Job Name:

Catalog Number:

Type:

EMOVAL | EXTERIOR EMERGENCY LIGHT

FEATURES

- Input power 120/277VAC at 50/60Hz
- Solid state charging and switching
- Comes with Self-Diagnostics option
- Battery: Sealed, maintenance-free nickel-cadium
- Wide throw distribution

CONSTRUCTION

- Compact, low-profile, architectural design with die-cast aluminum housing
- Finishes are texturized powder coat paint for white and dark bronze
- Test switch and indicator light are both located on the bottom of the housing for unit and remote and is easily accessible and visible from the floor

ELECTRICAL

- Dual voltage 120/277V, 50/60hz input
- Current-limiting charger maximizes battery life and minimizes energy consumption to provide low operating costs
- Filtered charger input minimizes charge voltage ripple and extends battery life.
- Photocell feature standard for normally on product to discontinue illumination during periods when ambient light is present
- Battery type: Sealed, maintenance-free nickel-cadium

LIGHT SOURCE

- LEDs with life expectancy of L70 of 50,000 hours
- Delivers 1080 lumens in Normal-On operation and 350 lumens in Emergency operation
- Wide throw distribution: Outdoor wide throw distribution: 30' (3' path of egress) at a 7.5' mounting height with 1 FC Average
- 5000K correlated color temperature (CCT)

PRODUCT IMAGE



APPLICATIONS

- Entryways, Loading Docks, Utility Sheds, Security

WARRANTY

- 5-Year limited warranty. Please refer www.highlineled.com/ for complete warranty terms and conditions.

LISTINGS

- UL Listed
- Wet Location Rated

ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : EMOVAL-ND-UNV-ACEM-WH-IH

Family	Dimming	Input	Operation Mode	Finish	Options
EMOVAL	D - Dimming ND - Non-Dimming	120 - 120V 277 - 277V UNV - Universal	ACEM - General & Emergency Lighting AC - General Lighting Only EM - Emergency Lighting Only	WH - White BK - Black BZ - Bronze GR - Graphite SR - Silver	IH - Internal Battery Heater



RoHS Compliant




Damp Location



EMOVAL SERIES | EXTERIOR EMERGENCY LIGHT

DIMENSIONS

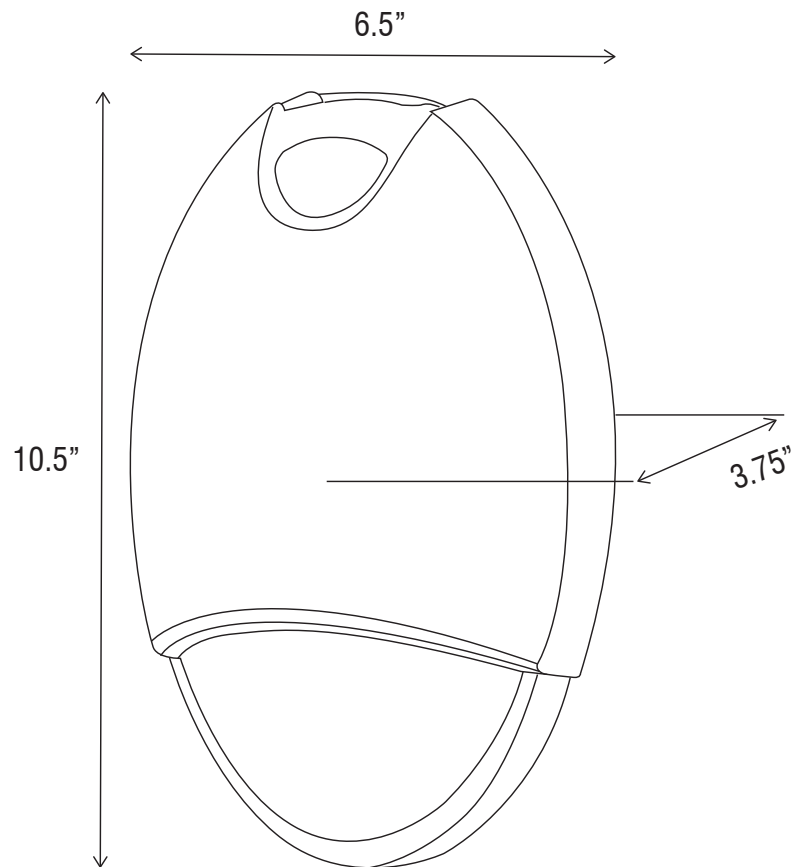

*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
CONSULT FACTORY FOR UP TO DATE INFORMATION.