Submitted by Highline LED, Midland, TX		Ostolov Number	Tunos
	Job Name:	Catalog Number:	Туре:

EFFLOW | EXHAUST FAN WITH LED LIGHT

PRODUCT IMAGE




- 100 CFM, Powerful ventilation to remove moisture and reduce the risk of mold or mildew in most full baths
- 2.5 Sones for Quiet performance, enough sound to know your fan is On
- 30W Fan Power with 12W LED light source, rated for 30,000 hours of use
- Compact housing for versatile installation
- Powerful enough for rooms up to 75 sq. ft.
- · Brighter white grilles blend in to match most common ceiling paint
- · ABS Plastic material housing stands up to moisture
- Permanently lubricated AC motor engineered for continuous operation
- · Long life NSK Ball Bearing
- UL Listed Control Gear





DIMENSIONS

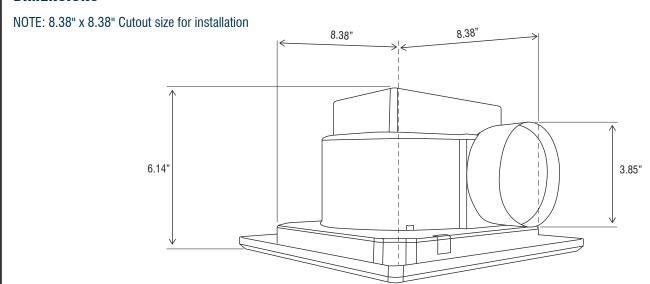

ORDERING INFORMATION

EXAMPLE ORDERING NUMBER: EFFLOW-ND-120-45-65-WH

Family	Dimming	Input	Power/Lumens	ССТ	Finish	Options
EFFLOW	D - Dimming ND - Non-Dimming	120 - 120V 277 - 277V UNV - Universal	42 - 42W/960LM (30W FAN 12W LED)	65 - 6500K	WH - White	Blank - Not required