



Job Name:

Catalog Number:

Type:

WPFCUT SERIES | FULL CUTOFF WALLPACK

FEATURES

- Latest generation of LED chips delivers a similar light output to a 175, 250, or 400W metal halide using only 1/3rd the energy consumption
- Dusk to dawn / occupancy sensor compatible
- Light engine's available in: 3500K, 4000K, 5000K and 6500K
- High efficacy luminaire up to 130LPW
- Self contained driver

CONSTRUCTION

- The single-piece die-cast aluminum housing to optimize thermal transfer from the light engine and promote long life
- The driver is mounted in direct contact with the casting for a low operating temperature and long life
- The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP65 rating for the luminaire
- -40°F to 113°F (-40°C to 45°C) operating temperature

ELECTRICAL

- Accommodates 120-277V at 50/60Hz
- Dimmable power supply (0-10V)
- Power Factor is more than 0.9
- Total Harmonic Distortion less than 20%
- 6kV built-in surge protection

LIGHT SOURCE

- Individually formed acrylic lenses are engineered for superior application efficiency which maximizes the light in the areas where it is most needed
- Light engine consists of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L70/50,000 hours at 25°C)
- Light engine's available in 3500K, 4000K, 5000K, and 6500K
- High Efficacy up to 130LPW
- Superior color rendering index more than 80+

PRODUCT IMAGE



APPLICATIONS

- Walkways, Entryways, Storage Areas, Utility Sheds, Loading Docks

WARRANTY

- 5-Year limited warranty. Please refer www.highlineled.com/ for complete warranty terms and conditions.

LISTINGS

- ETL Listed
- Wet Location Rated
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please contact our sales rep for list of DLC approved products.

ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : WPFCUT-ND-UNV-5-30-80-BK-15



Family	Dimming	Input	Power/Lumens	CCT	CRI	Finish	Beam Angle	Options
WPFCUT	D - Dimming	120 - 120V	45 - 45W, 5850LM	30 - 3000K	80 - 80 CRI	WH - White	90 - 90 Degree	Blank - Not required
	ND - Non-Dimming	277 - 277V	80 - 80W, 10400LM	40 - 4000K	90 - 90 CRI	BK - Black	120 - 120 Degree	EM08 - 8W 90Mins EM Backup
		UNV - Universal	100 - 100W, 13000LM	50 - 5000K	60 - 6000K	BZ - Bronze		EM15 - 15W 90Mins EM Backup
						GR - Graphite		PS - Photosensor
						SR - Silver		



Job Name:



Catalog Number:

Type:



WPFCUT SERIES | FULL CUTOFF WALLPACK

DIMENSIONS

45W, 80W

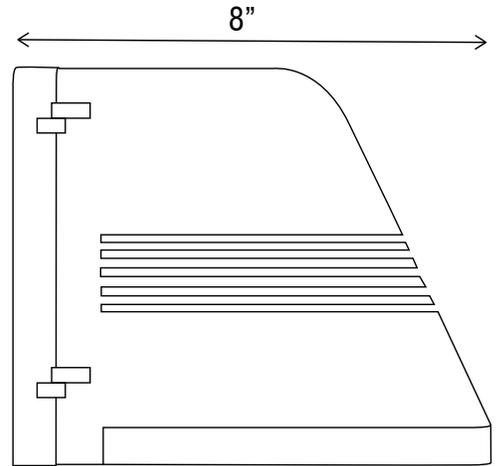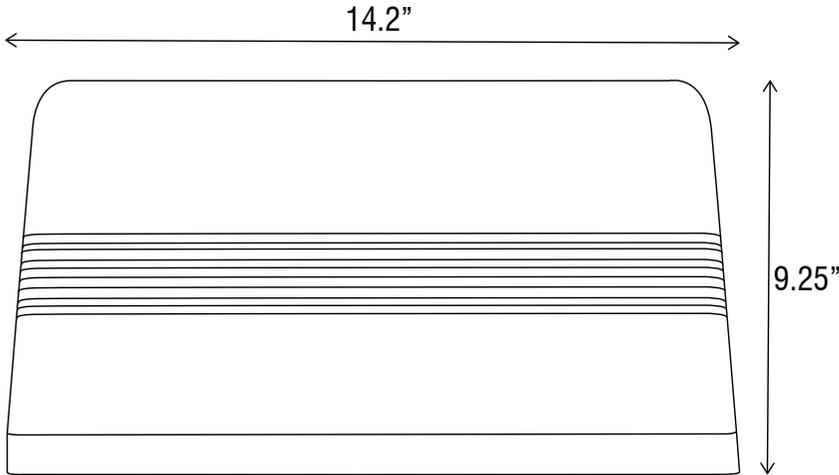

100W

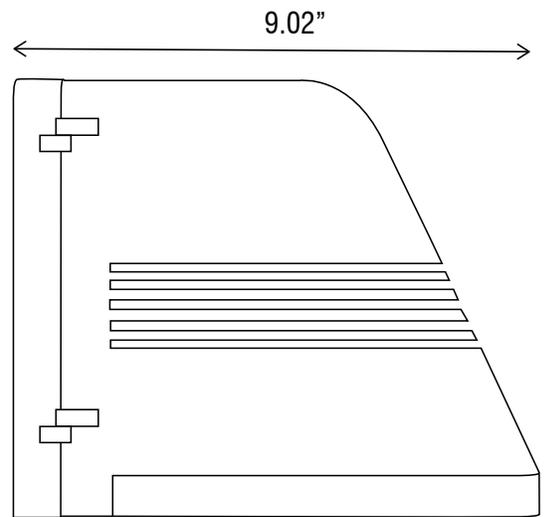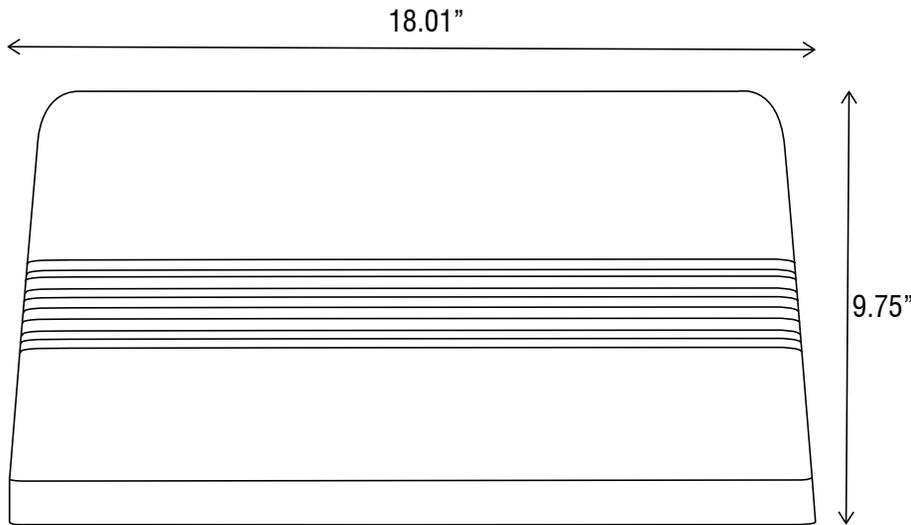

*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONSULT FACTORY FOR UP TO DATE INFORMATION.