



Job Name:

Catalog Number:

Type:

BL2300 SERIES | LED BOLLARD LIGHT

FEATURES

- Available in Flat top and Round top.
- Two fully optical distributions are available: symmetrical and asymmetrical
- Class 2 electronic drivers are designed for an expected life of 50,000 hours
- Light engines available in: 30K, 40K, 50K, 65K
- Suitable for wet location: IP66

CONSTRUCTION

- One-piece 8-inch round extruded aluminum shaft with thick side walls for extreme durability, a high-impact clear acrylic lens and welded top cap.
- Die-cast aluminum mounting ring allows for easy leveling even in sloped locations and a full 360-degree rotation for precise alignment during installation.
- Three ½" x 11" anchor bolts with double nuts and washers and ¾" bolt circle template ensure stability.
- Overall height is 40" standard.

ELECTRICAL

- Light engines consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life.
- Class 2 electronic drivers are designed for an expected life of 50,000 hours with < 1% failure rate.
- Electrical components are mounted on a removable power tray.

LIGHT SOURCE

- Two fully cutoff optical distributions are available: symmetrical and asymmetrical.
- IP66 sealed LED light engine provides smoothly graduated illumination without any uplight.
- Light engines are available in standard 4000K or optional 3000K, or 5000K and 6500K.
- Limited-wavelength amber LEDs are also available.

PRODUCT IMAGE



APPLICATIONS

- Building Entryways, Walking paths, and pedestrian plazas

WARRANTY

- 5-Year limited warranty. Please refer www.highlineled.com/ for complete warranty terms and conditions.

LISTINGS

- ETL Listed
- Wet Location Rated
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please contact our sales rep for list of DLC approved products.

ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : BL2300-ND-UNV-20-30-80-BK-15-FT

RoHS
Compliant

Wet Location

Family	Dimming	Input	Power/Lumens	CCT	CRI	Finish	Distribution	Options
BL2300	D - Dimming	120 - 120V	20 - 20W, 2000LM	30 - 3000K	80 - 80 CRI	WH - White	15 - Degree	FT - Flat Top
	ND - Non-Dimming	277 - 277V		40 - 4000K	90 - 90 CRI	BK - Black	30 - 30 Degree	RT - Round Top
		UNV - Universal			50 - 5000K	BZ - Bronze	60 - 60 Degree	
					60 - 6000K	GR - Graphite	120 - 120 Degree	
				SR - Silver	180 - 180 Degree	SYM - Symmetric		




Job Name:

Catalog Number:

Type:

BL2300 SERIES | LED BOLLARD LIGHT

DIMENSIONS

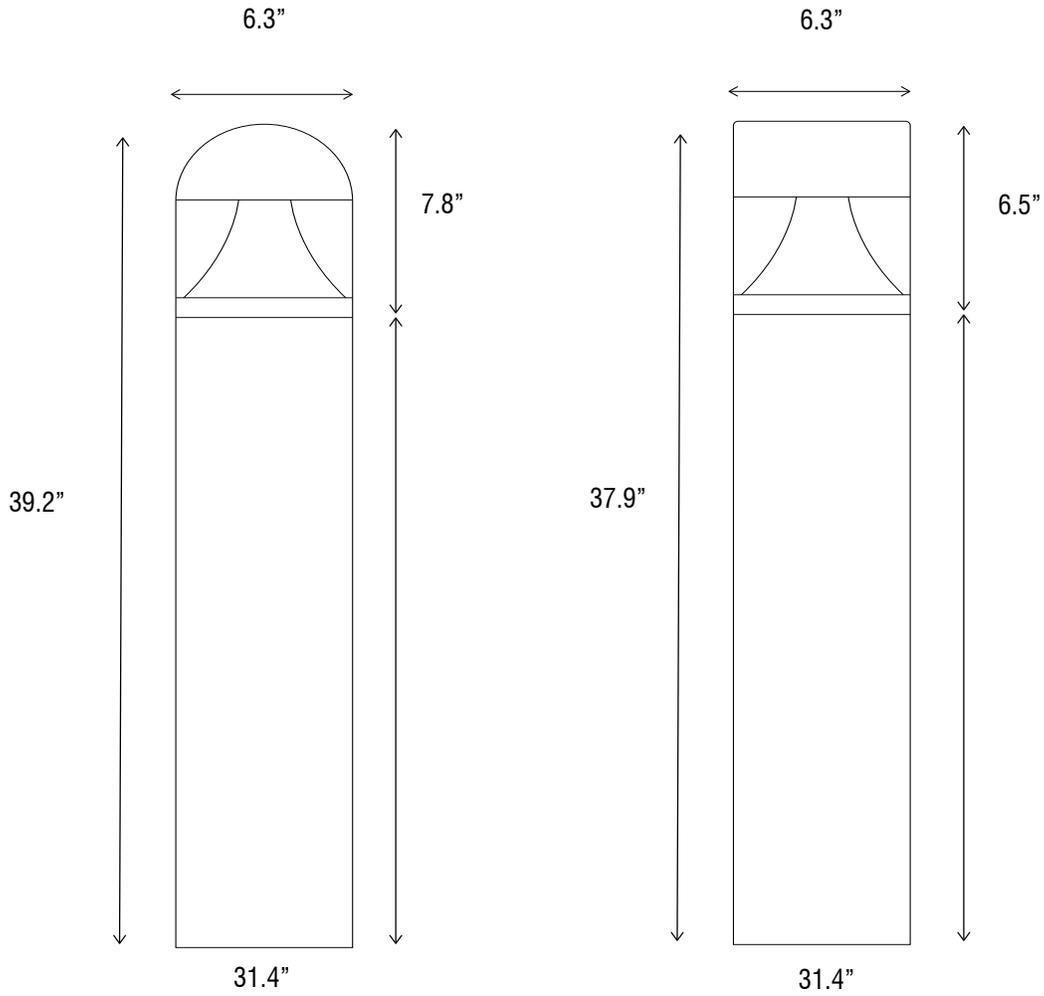

*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONSULT FACTORY FOR UP TO DATE INFORMATION.