



Job Name:

Catalog Number:

Type:

CPGAS SERIES | LED GAS STATION CANOPY LIGHT

FEATURES

- Quick mount design simplifies installation
- Low profile is ideal in applications with low mounting heights
- Energy-efficient solutions for surface-mount applications
- High efficacy luminaire up to 150LPW
- Suitable for wet locations: IP65

CONSTRUCTION

- Constructed with a rugged, rust-proof, die-cast aluminum housing and finished with a UV stabilized powder coat paint, this product will be protected against fade and rust
- The aluminum case provides excellent thermal transfer to extend component life
- Operates on temperature -22 to -105°
- Components are RoHS compliant

ELECTRICAL

- Accommodates 120-277VAC at 50/60Hz
- Built with Steady-Dim technology and is compatible with 0-10V dimmers
- Luminaires use an array of LED's on a metal core circuit board, creating a dispersed light source which reduces surface brightness
- High efficient driver with power factor more than 0.9
- Total Harmonic Distortion less than 20%

LIGHT SOURCE

- Tempered glass with wide light distribution, makes the whole LED canopy light more concentrated and more evenly distributed
- High-efficiency LEDs maintain 70% of light output at 50,000 hours of service life (L70/50,000 hours)
- Light engines are available in 4000K, 5000K, and 6500K, Selectable with Switch
- Superior color rendering index, more than 80+

PRODUCT IMAGE



APPLICATIONS

- Entryways, Utility Closets, Garages, Public Restrooms, Plazas

WARRANTY

- 5-Year limited warranty. Please refer www.highlineled.com/ for complete warranty terms and conditions.

LISTINGS

- ETL Listed
- Wet Location Rated


ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : CPGAS-D-UNV-100-40-80-WH-T5



Family	Dimming	Input	Power/Lumens	CCT	CRI	Finish	Distribution	Options
CPGAS	D - Dimming	120 - 120V	100 - 100W, 15000LM	40 - 4000K	80 - 80 CRI	WH - White	T5 - Type V	Blank - Not required
	ND - Non-Dimming	277 - 277V	120 - 120W, 18000LM	50 - 5000K	90 - 90 CRI	BK - Black		EM08 - 8W 90 Mins EM backup
		UNV - Universal	150 - 150W, 22500LM	65 - 6500K		BZ - Bronze		EM15 - 15W 90 Mins EM backup
			MP - Multi-Power 100W/120W/150W	MCCT - Multi -CCT 40K/50K/65K				

CPGAS SERIES | LED GAS STATION CANOPY LIGHT

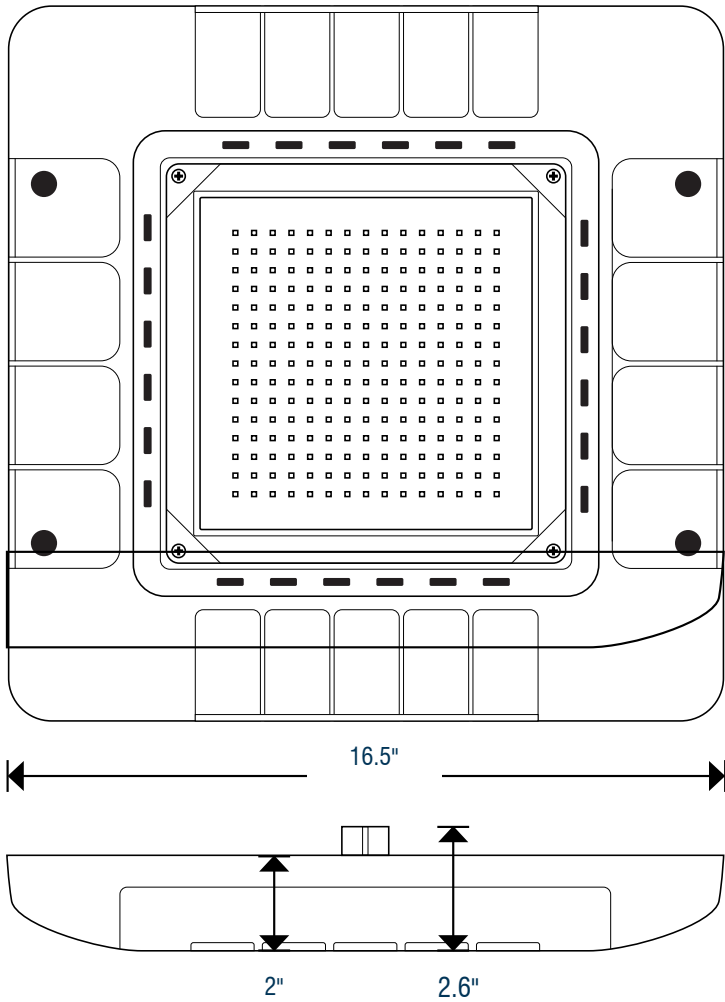

*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONSULT FACTORY FOR UP TO DATE INFORMATION.