



Job Name:

Catalog Number:

Type:

EXWEM | LED EXIT WITH EMERGENCY LAMP HEADS

FEATURES

- Adjustable LED lamp heads for minimum 90-minute emergency illumination
- Letters 6" height with 3/4" stroke
- Knockout directional chevrons
- Rechargeable Ni-Cad battery
- Self-diagnostic option available

CONSTRUCTION

- Engineering-grade thermoplastic housing is impact-resistant, scratch-resistant, and corrosion-proof and UL94V-0 flame rating
- UV-stable resin resists discoloration from natural and man-made light sources
- Rugged unibody housing snaps together with no additional mechanical fasteners
- Faceplate and back cover are interchangeable on housing
- Universal directional Chevron inserts are easily removed and reinserted
- Reinforced, impact-resistant color panels

ELECTRICAL

- Accommodates dual 120V/277VAC at 50/60Hz
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing
- Long-life, maintenance-free, rechargeable Ni-Cad battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours

LIGHT SOURCE

- Adjustable LED lamp heads provides optimal center-to-center spacing
- Twin LED lamp heads operate in emergency (DC input) mode with 2 x 1W series-parallel white LEDs in each head
- Provides redundant light sources to ensure emergency lighting performance
- The typical life of the exit LED lamp is 5 years

PRODUCT IMAGE



APPLICATIONS

- Above the door applications and other tight fits

WARRANTY

- 5-Year limited warranty. Please refer www.highlineled.com/ for complete warranty terms and conditions.

LISTINGS

- UL and cULus Listed
- Meets UL 924, NFPA 101 (current Life Safety Code), NEC and OSHA illumination standards.
- Damp Location Rated

RoHS
Compliant

Damp Location


ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : EXWEM2-ND-UNV-LED-RD-WH

Family	Dimming	Input	Lamp Type	Letter Color	Finish	Options
EXWEM2	D - Dimming ND - Non-Dimming	120 - 120V 277 - 277V UNV - Universal	LED - Two 1.5W / 9.6V White LED	RD - Red GR - Green	WH - White SR - Silver	BLANK - Not Required NC - Nickel-cadium battery SD - Self-diagnostics EM - Factory installed EM backup

EXWEM | LED EXIT WITH EMERGENCY LAMP HEADS

DIMENSIONS

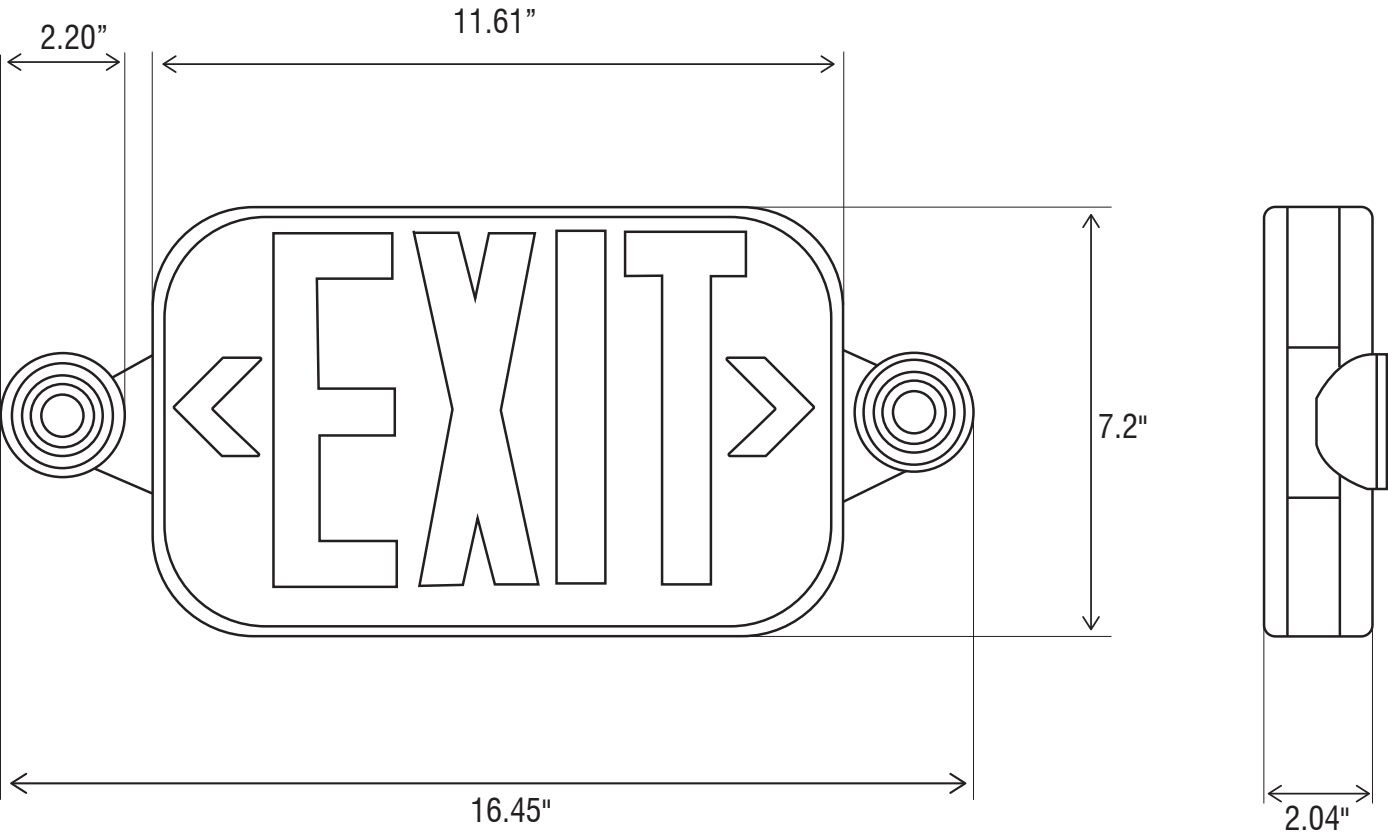

*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE.
CONSULT FACTORY FOR UP TO DATE INFORMATION.