



Job Name:

Catalog Number:

Type:

WPMINI SERIES | MINI WALLPACK

FEATURES

- Replaces 70W Metal Halide with super bright light
- Economical and energy efficient LED solution for general purpose wall mount lighting
- Luminaire available in 18W and 25W versions
- Safety Mechanism against accidental closing
- Suitable for wet location: IP65

CONSTRUCTION

- Durable die cast aluminum housing
- Front cover is impact-resistant polycarbonate which is fully gasketed
- All electronics are protected in the upper housing
- Housing is sealed against moisture and environmental contaminants
- Rated for -40°C to 40°C ambient temperature.

ELECTRICAL

- Accommodates 120-277VAC at 50/60Hz
- Light engine consists of high-powered, long-life, high-efficacy LEDs mounted on an internal aluminum heat sink to maximize heat dissipation and promote long life (L70/50,000 hours at 40°C)
- Power Factor is more than 0.90
- Total Harmonic Distortion less than 20%

LIGHT SOURCE

- Protective polycarbonate lens covers the LEDs
- Prismatic front cover and precision-molded reflector for superior uniformity and fixture spacing
- Light engine's available in 3500K, 4000K, 5000K, and 6500K
- Superior color rendering index more than 80+
- Rated lifetime L70: 50,000 hours
- High efficacy luminaire up to 130LPW

PRODUCT IMAGE



APPLICATIONS

- Walkways, Entryways, Storage Areas, Utility Sheds, Loading Docks

WARRANTY

- 5-Year limited warranty. Please refer www.highlineled.com/ for complete warranty terms and conditions.

LISTINGS

- ETL Listed
- Wet Location Rated
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please contact our sales rep for list of DLC approved products.

ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : WPMINI-ND-UNV-18-30-80-BK-RD



--	--	--	--	--	--	--	--	--

Family	Dimming	Input	Power/Lumens	CCT	CRI	Finish	Shape	Options	
WPMINI	D - Dimming	120 - 120V	18 - 18W, 2340LM	30 - 3000K	80 - 80 CRI	WH - White	SQ - Square	Blank - Not required	
	ND - Non-Dimming	277 - 277V	25 - 25W, 3250LM	40 - 4000K	90 - 90 CRI	BK - Black	RD - Round	EM08 - 8W 90Mins EM Backup	
		UNV - Universal			50 - 5000K		BZ - Bronze		EM15 - 15W 90Mins EM Backup
						65 - 6500K		GR - Graphite	
						SR - Silver			




Job Name:

Catalog Number:

Type:

WPMINI SERIES | MINI WALLPACK

DIMENSIONS

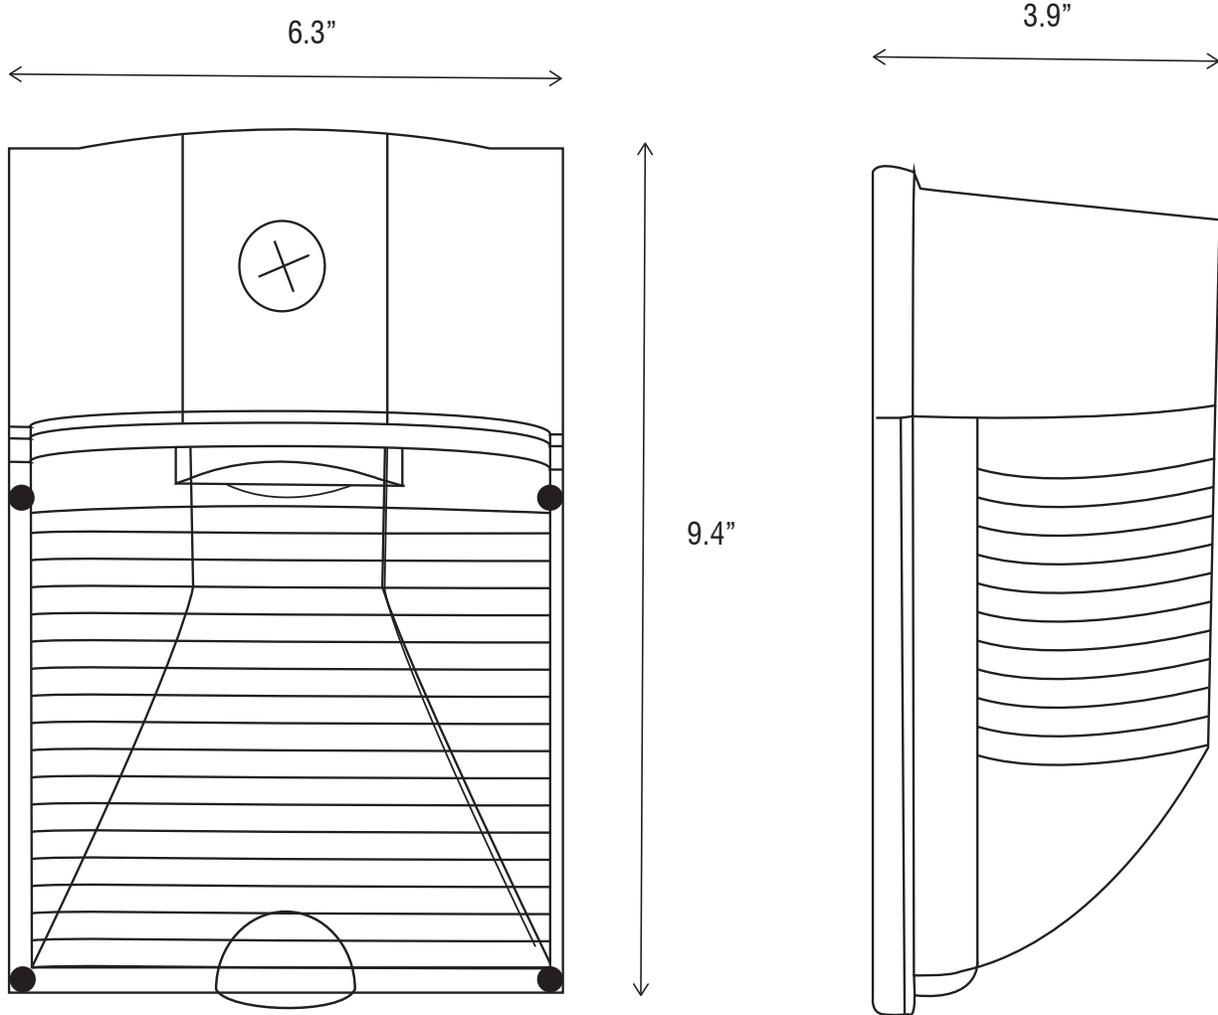

*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONSULT FACTORY FOR UP TO DATE INFORMATION.