



Job Name:

Catalog Number:

Type:

## HBLINR SERIES | LINEAR HIGH-BAY

### FEATURES

- Available in 2' Ft and 4' Ft versions
- UL listed Class-II driver for smooth & maintenance free performance
- More than > 130LPW ultra-high efficiency delivers superior performance over fluorescent and HID, saving up to 60% of energy costs
- Optics are IP5X rated

### CONSTRUCTION

- Heavy gauge steel body with welded frame construction resists twisting and bowing
- Lightweight aluminum heat sink designed to perform in ambient temperatures
- Diffuse frosted acrylic lens to control glare (standard) or optional clear lens for higher light output (sold separately)
- Joiner brackets are available on request for continuous row mounting
- Available in 10 ft. Y-toggle aircraft cable mounting for higher ceilings(available on special order request)

### ELECTRICAL

- Accommodates 120-277VAC at 50/60Hz
- Comes equipped with luminaire quick-disconnect
- Designed for optimal thermal performance and long LED life
- Dimmable power supply (0-10V) standard
- Power factor is more than 0.90
- Total Harmonic Distortion less than 20%

### LIGHT SOURCE

- Diffuser lens reduces glare and improves occupant working conditions while maintaining high efficiency emission
- Reflector systems features highly reflective coating, delivering adequate light for high-mounting heights
- Light engine's available in 2700K, 3000K, 3500K, 4000K, 5000K and 6500K with 80 + CRI and 90+ CRI(special order)
- Available in wide and narrow light distributions

### PRODUCT IMAGE



### APPLICATIONS

- Warehouses, Storage Facilities, Manufacturing Plants

### WARRANTY

- 5-Year limited warranty. Please refer [www.highlineled.com/](http://www.highlineled.com/) for complete warranty terms and conditions.

### LISTINGS

- ETL Listed
- All components have UL certification
- UL Class 2 driver
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product is DLC qualified, Contact our sales rep for DLC qualified products



## ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : HBLINR-ND-UNV-165-2-35-80-WH

Family	Dimming	Input	Power/Lumens	Size	CCT	CRI	Finish	Options
HBLINR	D - Dimming	120 - 120V	120 - 120W, 15600LM	2 - 2' Feet	27 - 2700K	80 - 80 CRI	WH - White	Blank - Not required
		277 - 277V	30 - 3000K	90 - 90 CRI	C - Custom Finish	AC - Aircraft Cable		
	ND - Non-Dimming	UNV - Universal	165 - 165W, 21450LM	4 - 4' Feet	35 - 3500K			EM08 - 8W 90Mins EM Backup
			325 - 325W, 42250LM	40 - 4000K	EM15 - 15W 90Mins EM Backup			
50 - 5000K	MS - Motion Sensor							
65 - 6500K	OS - Occupancy Sensor							
								JB - Joiner Brackets





Job Name:

Catalog Number:

Type:

# HBLINR SERIES | LINEAR HIGH-BAY

## DIMENSIONS

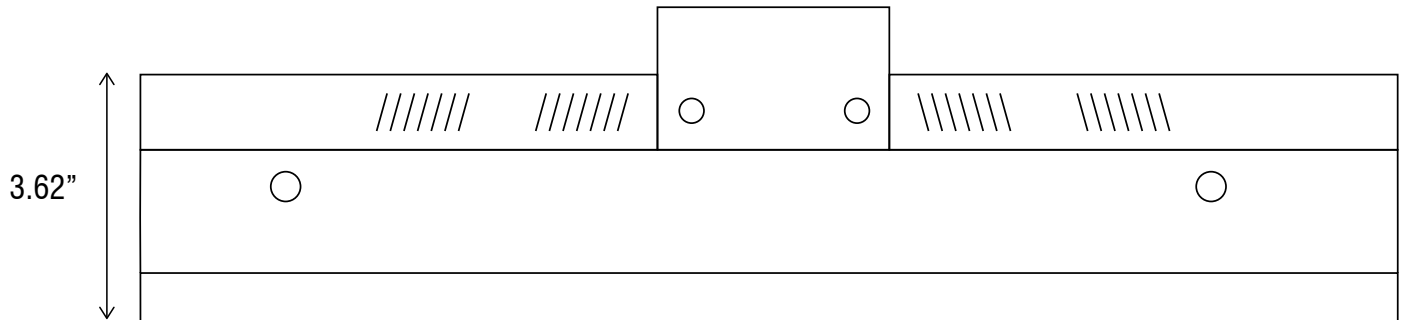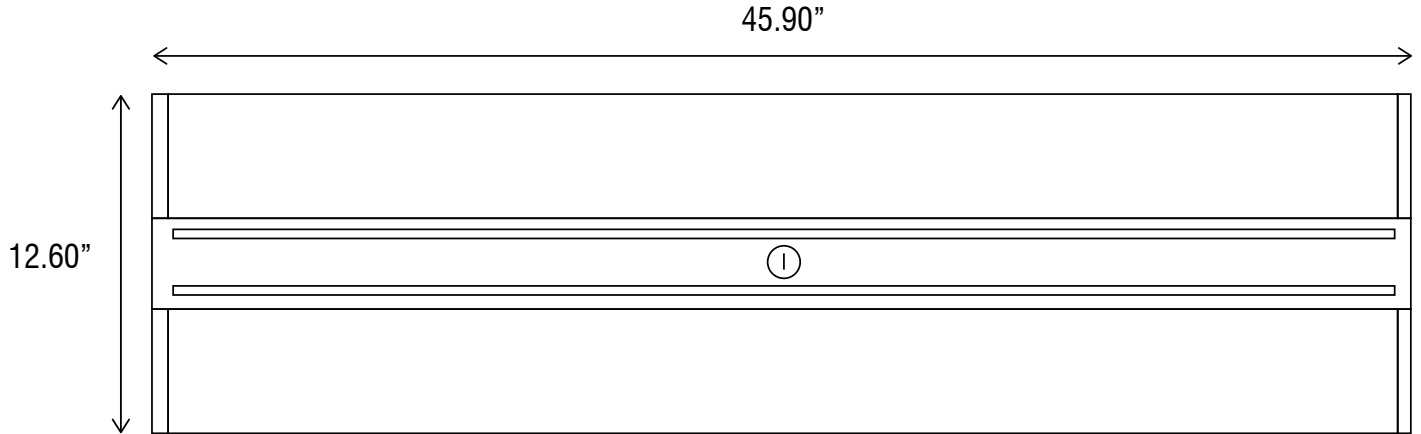

\*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONSULT FACTORY FOR UP TO DATE INFORMATION.