



Job Name:

Catalog Number:

Type:

## WPGEN1 SERIES | LED WALLPACK

### FEATURES

- UV stabilized powder-coated bronze finish
- Enclosure and hardware are corrosion resistant
- High-efficacy luminaires up to 130LPW
- Dimming option available (on specific models)
- Suitable for wet locations

### CONSTRUCTION

- Rugged cast-aluminum housing with bronze polyester powder paint for lasting durability.
- Door is hinged on the side so door swings out of the way during installation & service.
- Castings are sealed with a one-piece gasket to inhibit the entrance of external contaminants.
- Multiple ½" NPS entry points for conduit and accessories
- Borosilicate tempered glass lens

### ELECTRICAL

- Accommodates 120-277V at 50/60Hz with 2KV surge protection
- Driver and integral photocell operate at 120V and are fully enclosed in the upper housing.
- Power Factor is more than 0.9
- Total Harmonic Distortion less than 20%
- -40°F to 104°F (-40°C to 40°C) operating temperature

### LIGHT SOURCE

- High efficacy luminaires up to 130LPW
- Light engine's available in 3000K, 4000K, 4500K, 5000K and 6500K
- Superior color rendering index more than 80+, also can be with CRI90+ on order.
- High-performance LEDs maintain up to 80% of light output at 50,000 hours of service life (L70/50,000 hours).
- Prismatic glass lens designed for superior lighting distribution, uniformity and fixture spacing.

### PRODUCT IMAGE



### APPLICATIONS

- Walkways, Entryways, Storage Areas, Utility Sheds, Loading Docks

### WARRANTY

- 5-Year limited warranty. Please refer [www.highlineled.com/](http://www.highlineled.com/) for complete warranty terms and conditions.

### LISTINGS

- ETL Listed
- Wet Location Rated
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please contact our sales rep for list of DLC approved products.

## ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : WPGEN1-ND-UNV-60-30-80-BK-RD



Family	Dimming	Input	Power/Lumens	CCT	CRI	Finish	Distribution	Options
WPGEN1	D - Dimming	120 - 120V	45 - 45W, 5850LM	30 - 3000K	80 - 80 CRI	WH - White	IV - Type IV	Blank - Not options
	ND - Non-Dimming	277 - 277V	60 - 60W, 7800LM	40 - 4000K	90 - 90 CRI	BK - Black		EM08 - 8W 90Mins EM Backup
		UNV - Universal	80 - 80W, 10400LM	45 - 4500K	BZ - Bronze	EM15 - 15W 90Mins EM Backup		
		100 - 100W, 13000LM	50 - 5000K	GR - Graphite	PS - Factory installed Photosensor			
		120 - 120W, 15600LM	60 - 6500K	SR - Silver				
		135 - 135W, 17550LM						
150 - 150W, 19500LM								



Job Name:



Catalog Number:

Type:

# WPGEN1 SERIES | LED WALLPACK

## DIMENSIONS

**45W, 60W, 80W 100W, 135W**

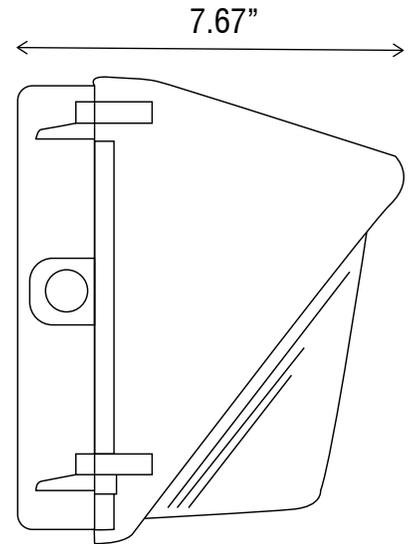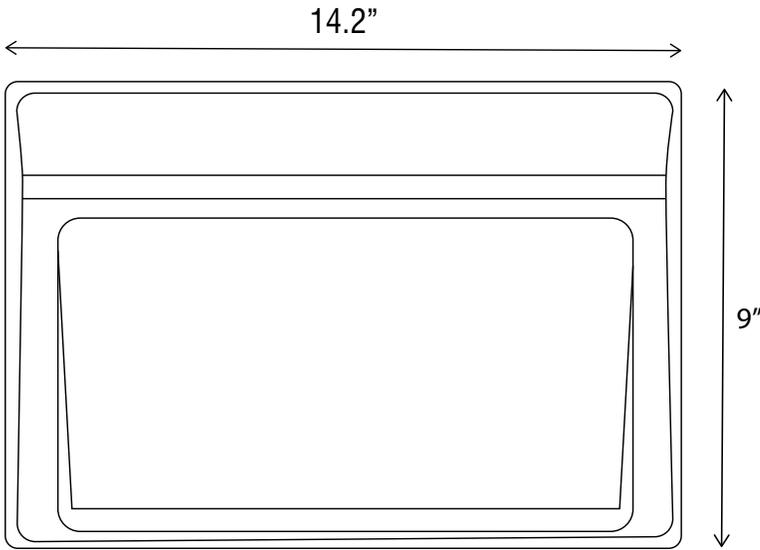

**150W**

