



Job Name:

Catalog Number:

Type:

UC1400 SERIES | UNDER CABINET LIGHT

FEATURES

- Available in five different sizes
- 120V direct powered, no transformer required
- Dimming option available with ELV 0-10V
- Switchable color temperature available on request
- Linkable up to 400 Watts

CONSTRUCTION

- Low profile design, with on/off rocker switch
- Can be direct wired or powered by 5' cord-and-plug (not included, see accessories)
- Connect up to 400 watts of fixtures with 13" connector cord or 7/8" end row connector (Included)
- Rugged post-painted low-profile steel housing with bronze finish
- Acrylic white diffuser provides soft widespread illumination with zip-lock design for easy installation, cleaning, and superior retention

ELECTRICAL

- Accommodates at 120VAC at 60Hz, no transformer required
- Dimming option available with ELV (Electronic Low Voltage)
- Power factor more than 0.90
- Power consumption of 8W per Foot
- Linkable up to 400 Watts
- -40°F(-40°C)~+140°F(+60°C) operating temperature

LIGHT SOURCE

- Long-life LEDs, coupled with a high-efficiency driver, provide extended service life
- Fixture is rated to deliver L70 performance at 50,000 hours
- Light engine's available in 3000K, 4000K, 5000K, and 6500K
- Provides 120° degree beam angle
- High efficacy up to 60 lm/watt to 80 lm/watt
- Superior color rendering index more than 80

PRODUCT IMAGE



APPLICATIONS

- Display cases, Task lighting, Office lighting, Work areas

WARRANTY

- 5-Year limited warranty. Please refer www.highlineled.com/ for complete warranty terms and conditions.

LISTINGS

- ETL Listed
- Damp Location Rated

ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : UC1400-ND-UNV-8-30-80-BK-15-FT



RoHS Compliant



Damp Location


Family	Dimming	Input	Size/Power/Lumens	CCT	CRI	Finish	Distribution	Options
UC1400	D - Dimming	120 - 120V	9 - 9", 4W, 336LM	30 - 3000K	80 - 80 CRI	WH - White	120 - 120 Degree	Blank - Not required
	ND - Non-Dimming	277 - 277V	12 - 12", 5W, 455LM	40 - 4000K	90 - 90 CRI	BK - Black		
		UNV - Universal	18 - 18", 8W, 752LM	50 - 5000K		BZ - Bronze		
			24 - 24", 10W, 890LM	65 - 6500K		SR - Silver		
			34 - 34", 15W, 1380LM					
		48 - 48", 20W, 1860LM						



Job Name:

UC1400 SERIES | UNDER CABINET LIGHT

DIMENSIONS

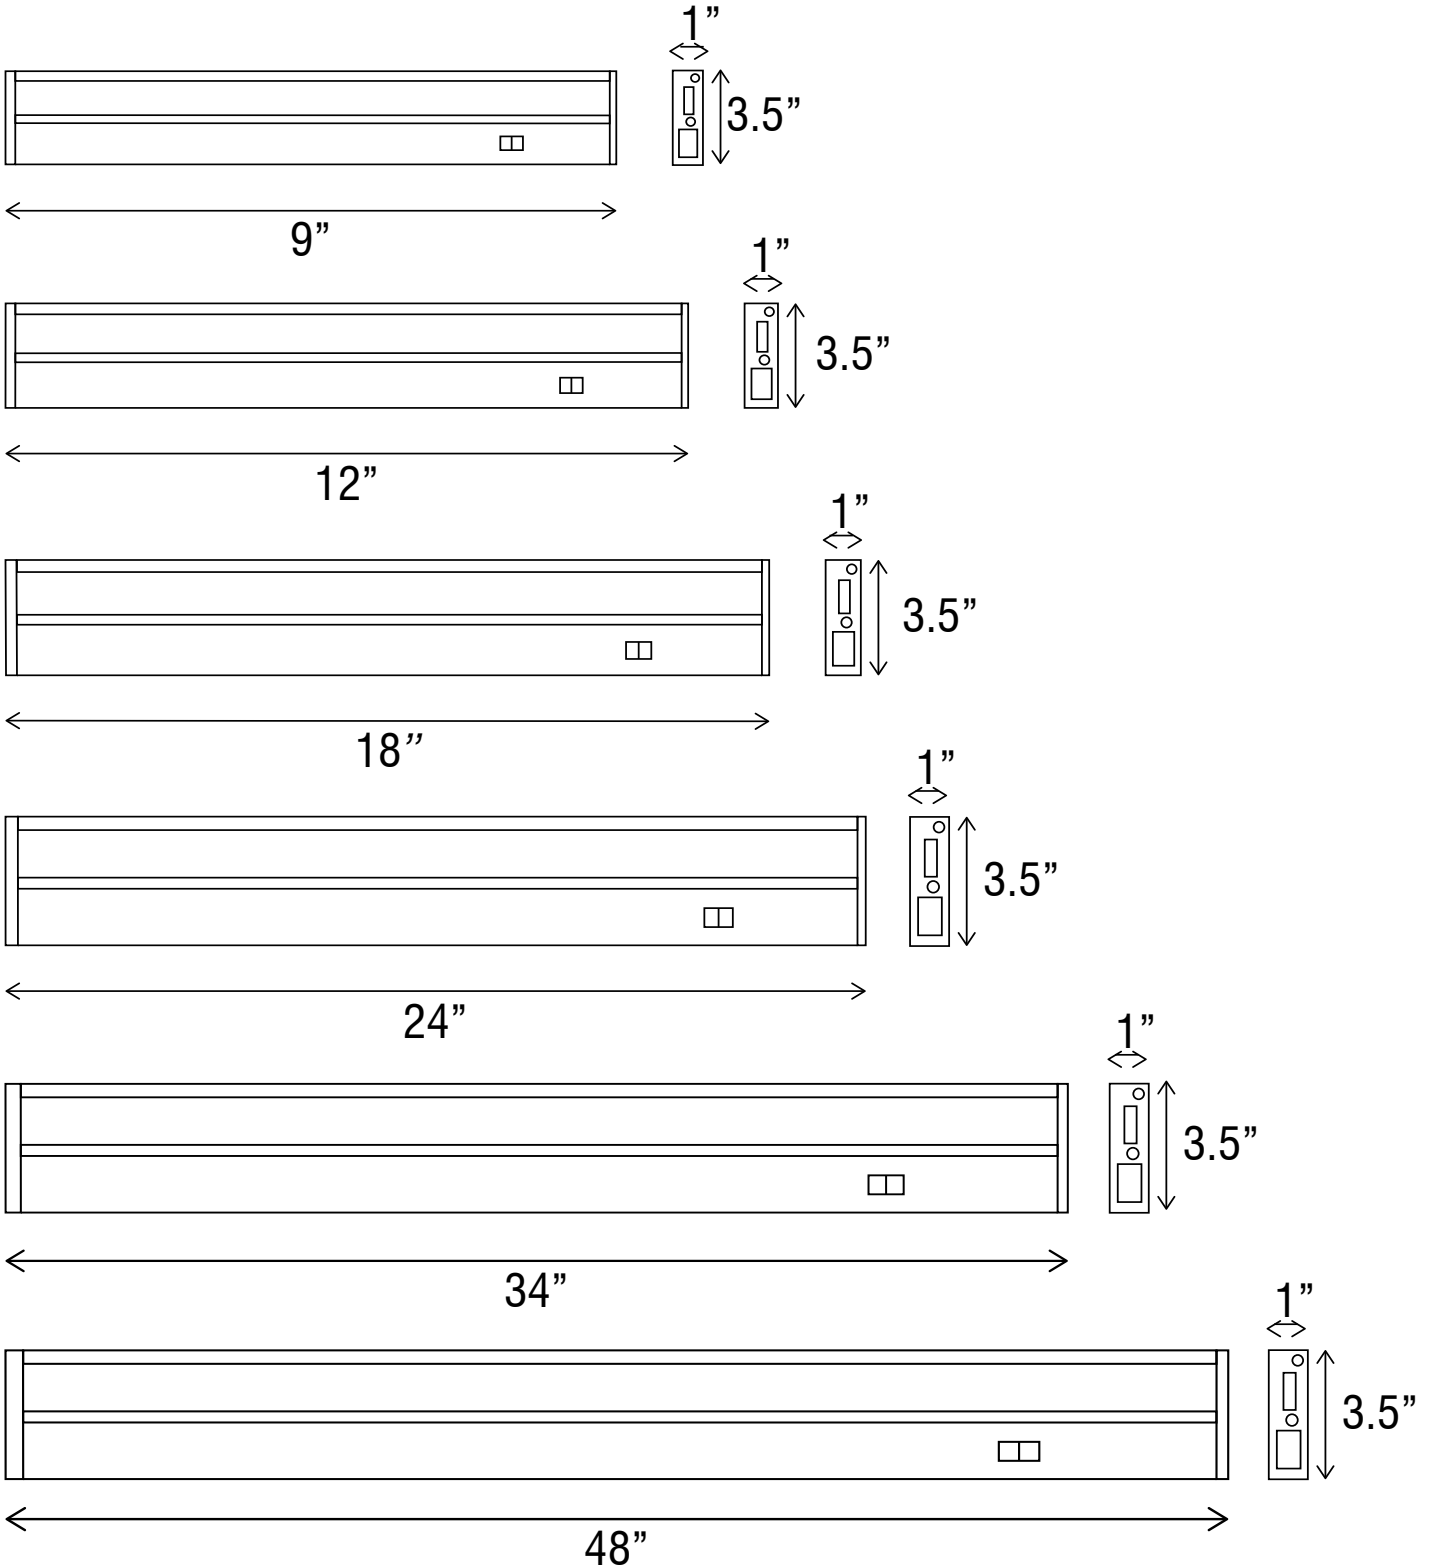

*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONSULT FACTORY FOR UP TO DATE INFORMATION.