



Job Name:

Catalog Number:

Type:

WPADJ | ADJUSTABLE WALLPACK

FEATURES

- Wall pack is 0°-90° adjustable
- Multiple light engines available in 3000K, 4000K, 5000K and 6500K
- High efficacy up to 130LPW
- Dimming capable (on specific fixtures)
- Wet location rated IP65

CONSTRUCTION

- Durable die-cast aluminum housing
- Integrated aluminum heat sink
- UV-resistant polycarbonate refractor lens
- Corrosion-resistant coating
- -40°F to 122°F (-40°C to 50°C) operating temperature
- Luminaire is 0° - 90° adjustable for flexible use

ELECTRICAL

- Accommodates 120-277VAC at 50/60Hz
- Dimmable power supply (0-10V dimming capable on specific fixtures)
- Power Factor is more than 0.9
- Total Harmonic Distortion less than 20%

LIGHT SOURCE

- UV-resistant polycarbonate refractor lens
- Type II distribution optics standard
- Rated lifetime L70: 50,000 hours
- Light engine's available in 3000K, 4000K, 5000K and 6500K
- Superior color rendering index more than 80+
- High efficacy up to 130LPW

PRODUCT IMAGE



APPLICATIONS

- Walkways, Entryways, Storage Areas, Utility Sheds, Loading Docks

WARRANTY

- 5-Year limited warranty. Please refer www.highlineled.com/ for complete warranty terms and conditions.

LISTINGS

- ETL Listed
- Wet Location Rated
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please contact our sales rep for list of DLC approved products.

ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : WPADJ-ND-UNV-80-30-80-BK-90

RoHS
Compliant

Family	Dimming	Input	Power/Lumens	CCT	CRI	Finish	Beam Angle	Options
WPADJ	D - Dimming	120 - 120V	50 - 50W, 6500LM	30 - 3000K	80 - 80 CRI	BK - Black	FC - Full Cut-off	Blank - Not required
	ND - Non-Dimming	277 - 277V	100 - 100W, 13000LM	40 - 4000K	90 - 90 CRI	BZ - Bronze		EM08 - 8W 90Mins EM Backup
	UNV - Universal	50 - 5000K		GR - Graphite				
		65 - 6500K		SR - Silver				



Job Name:



Catalog Number:

Type:



WPADJ | ADJUSTABLE WALLPACK

DIMENSIONS

80W

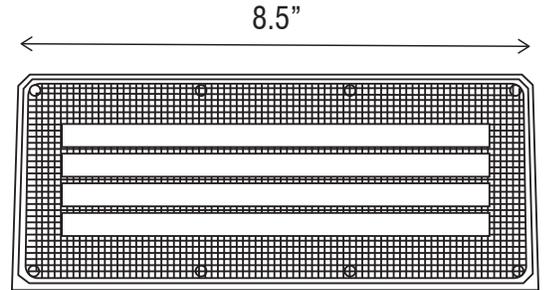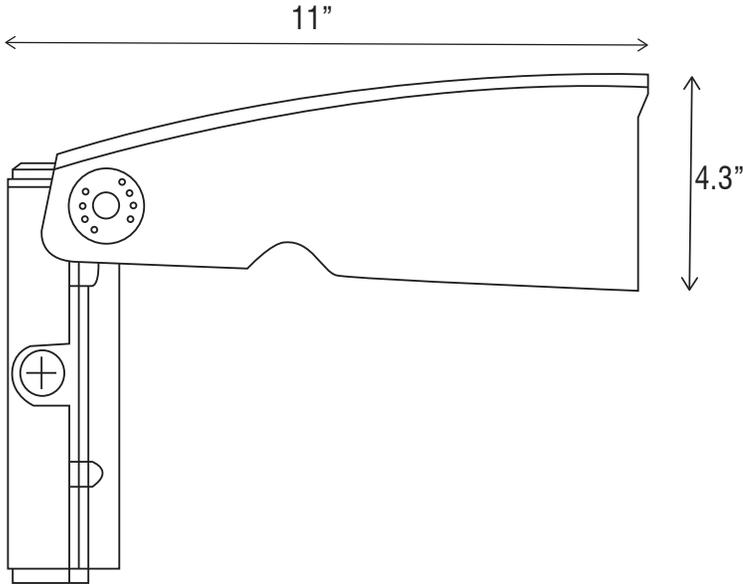

100W

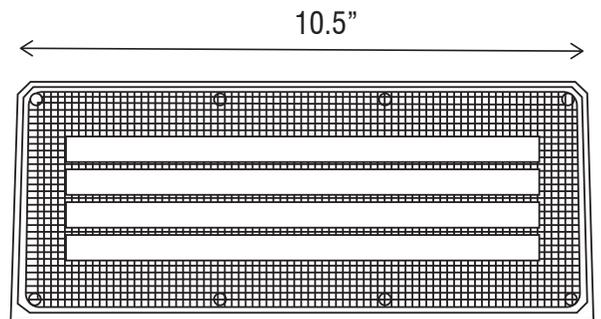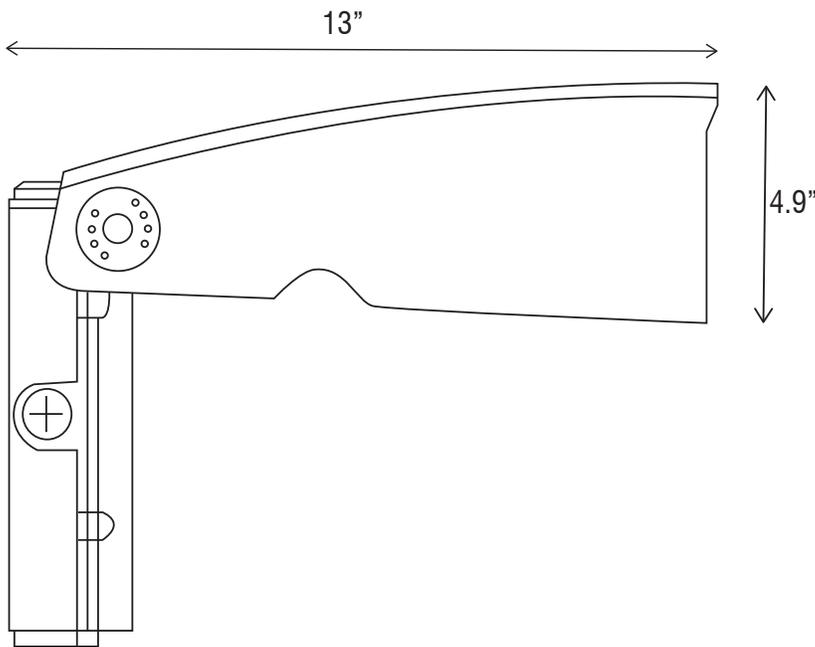

*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONSULT FACTORY FOR UP TO DATE INFORMATION.