# DISK SERIES | MCCT LED DISK LIGHT

Job Name:

### **FEATURES**

- Available in 4" & 6" configuration
- Diffuser comes with easy twist-lock installation, no visible screws
- High efficacy up to 70 LPW
- Dimmable down to 10%
- Suitable for wet locations

# **CONSTRUCTION**

- Constructed from Metal for fresh, sleek design
- Advanced aluminium heat sink for optimal heat dissipation allowing for extended lifetime
- Can be installed into any 5" or 6" Recessed Can or any 2.75", 3.5", or 4" Junction Box
- Accessories for both installation options can be ordered separately with each purchase
- Optimal for both new construction and retrofit remodel applications
- Wet-location rated, ideal for under soffit and shower installations

## **ELECTRICAL**

- Accommodates 120VAC at 60Hz
- Dimmable with most standard incandescent, magnetic low voltage and electronic low voltage dimmers
- Driver-on-board technology eliminates an external power supply
- Total Harmonic Distortion less than 20%
- Power Factor is more than 0.9
- Operating Temperature: 4°F to 104°F

## **LIGHT SOURCE**

- Provides instant on, bright light with a sleek, modern look
- Provides 90° beam angle for a wide flood light
- High efficacy up to 70 LPW
- Superior color rendering index, more than 90+
- Selectable CCT (3000K/3500K/4000K/5000K/6500K), simply switch the button on the back side to change the color temperature

## **ORDERING INFORMATION**

#### EXAMPLE ORDERING NUMBER : DISK-06- D-120-2-MCCT-90-WH

#### **APPLICATIONS**

**PRODUCT IMAGE** 

Healthcare, Hospitality, Residential, Office, Retail

#### WARRANTY

 5-Year limited warranty. Please refer www.highlineled.com/ for complete warranty terms and conditions.

### LISTINGS

ETL Listed


Wet Location

- Wet Location Rated
- Energy star Rated





Family	Size	Dimming	Input	Power/Lumens	CCT	CRI	Finish	Options
DISK		D - Dimming ND - Non-Dimming	<b>277</b> - 277V <b>UNV</b> - Universal	<b>12 -</b> 12W, 840LM <b>15 -</b> 15W, 1050LM	30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K 65 - 6500K MCCT - Mutti CCT Selectable with Switch 30K/35K/40K/50K/ 65K	90 - 90 CRI	WH - White C - Custom	Blank - Not required SP - Springs for mounting into recessed housing

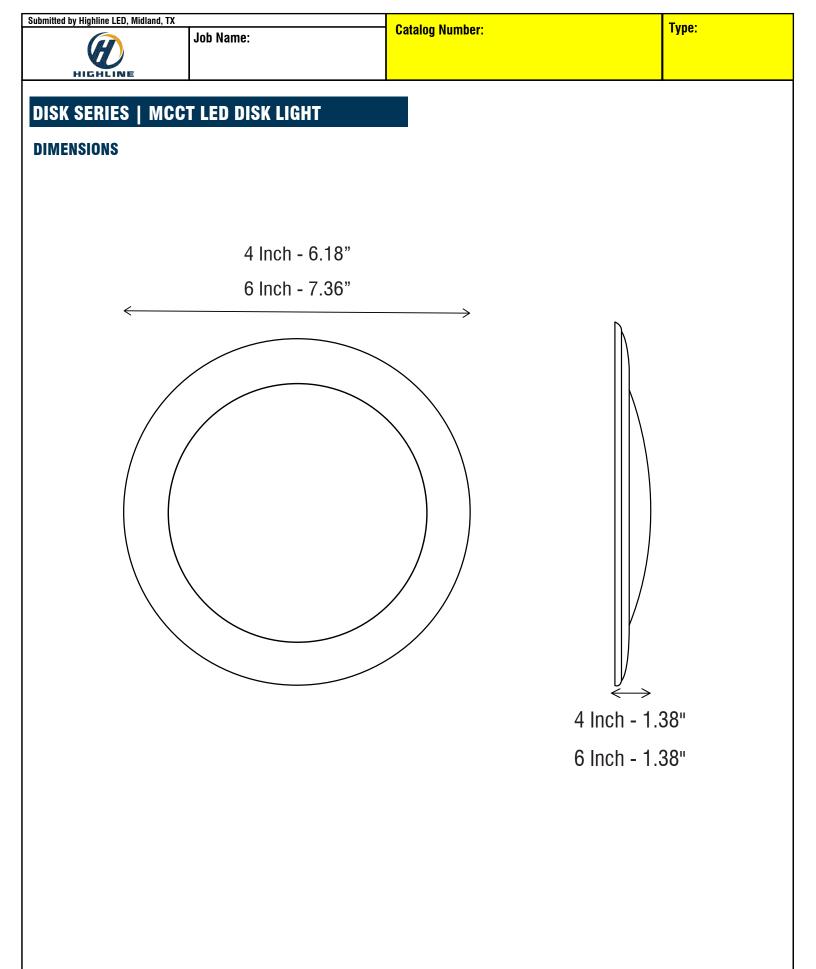

\*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. Consult factory for up to date information.