



Job Name:

Catalog Number:

Type:

UPDNDH SERIES | EXTERIOR UP & DOWN LIGHT

FEATURES

- Available wattage range: 24 watts to 72 watts
- Equal and even illumination in both directions, Up and Down side
- Available in: Round or Square shape
- All versions rated for 30,000 hours life
- Suitable for Wet Locations: IP65 Rated

CONSTRUCTION

- Cast-aluminum housing with corrosion-resistant paint in either dark bronze or white finish
- It can either be used up side, downside or in both up and down direction
- Luminaire is suitable for wet location IP65
- Multiple ceiling, pendant, cord, and wall mount options available
- White, bronze, silver or matte black (Consult factory for custom finishes)
- Available in standard and shallow heights

ELECTRICAL

- Accommodates at 120VAC at 50/60Hz
- Available in multiple wattage range: 12W and 18W
- Power factor is more than 0.9
- Total Harmonic Distortion less than 20%
- Operating temperature -30°C to 40°C.

LIGHT SOURCE

- Contains a plurality of high brightness white LED's producing even distribution with no pixilation
- Lumen output shall not decrease by more than 10% over the minimum life of 30,000 hours
- Light engine's available in: RGB, Red, Green, Blue, Pink, White, Violet, Yellow
- Available in 80 and 90 color rendering index (CRI) with multiple beam angles

PRODUCT IMAGE



APPLICATIONS

- Residential, Hospitality, Retail, Multi Family

WARRANTY

- 3-Year limited warranty. Please refer www.highlineled.com/ for complete warranty terms and conditions.

LISTINGS

- ETL Listed
- Wet Location Rated

ORDERING INFORMATION

EXAMPLE ORDERING NUMBER : UPDNDH-ND-UNV-12-Y-80-WH-RD

Family	Dimming	Input	Power/Lumens	CCT	CRI	Finish	Beam Angle	Options
UPDNDH	D - Dimming	120 - 120V	12 - 12W x 2	RGB - RGB	80 - 80 CRI	WH - White	5 - 5° Degree	Blank - Not required
	ND - Non-Dimming	277 - 277V	18 - 18W x 2	R - Red	90 - 90 CRI	BK - Black	15 - 15° Degree	EM - Factory installed EM battery backup
		UNV - Universal	24 - 24W x 2	G - Green	BZ - Bronze	30 - 30° Degree		
		36 - 36W x 2	B - Blue	GR - Gray	WW - Wall Washer			
		C - Custom	P - Pink	C - Custom	C - Custom			
			W - White					
			V - Violet					
			Y - Yellow					
			C - Custom					



RoHS Compliant



Wet Location




Job Name:

Catalog Number:


Type:

UPDNDH SERIES | EXTERIOR UP & DOWN LIGHT

DIMENSIONS

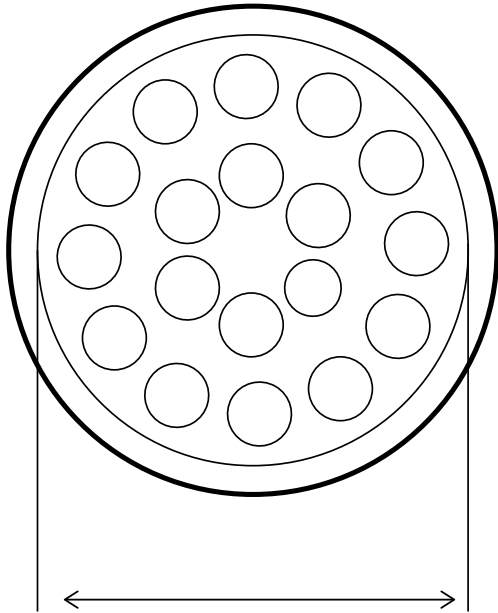

- 12W - Ø4.25"
- 18W - Ø5.69"
- 24W - Ø6.28"
- 36W - Ø7.07"

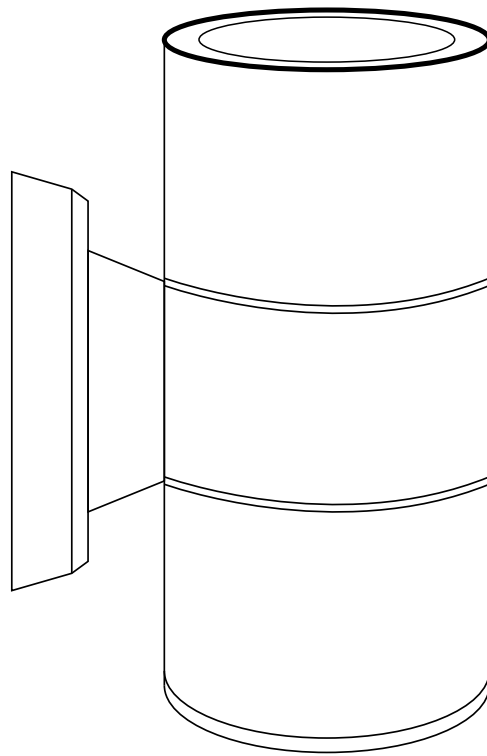

- 12W - 10.50"
- 18W - 11.81"
- 24W - 13.75"
- 36W - 13.75"

*DUE TO THE CHANGES OF CONSTANT IMPROVEMENT IN LED TECHNOLOGY, ALL DETAILS ARE SUBJECT TO CHANGE WITHOUT NOTICE. CONSULT FACTORY FOR UP TO DATE INFORMATION.